
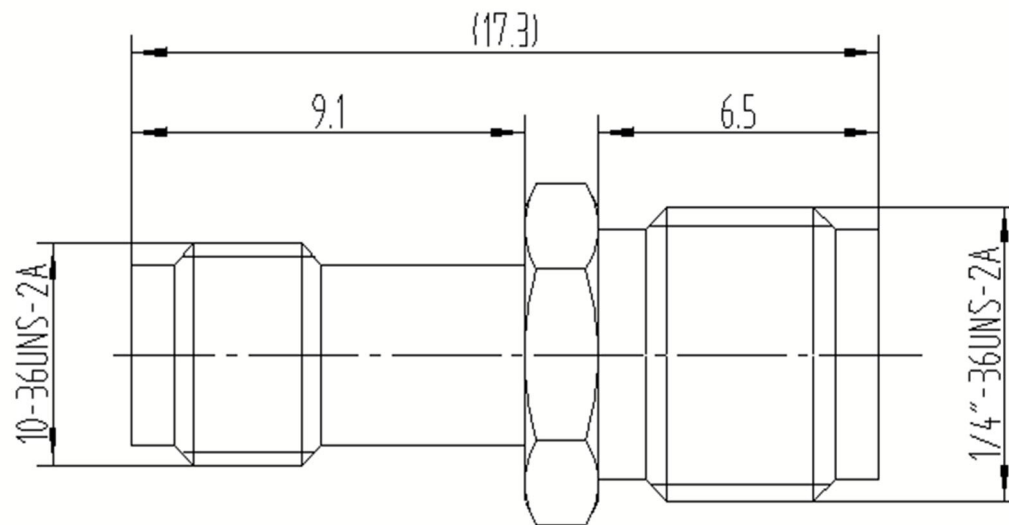


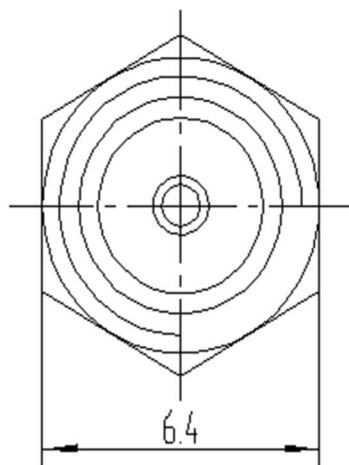

Electrical & Environmental Characteristics

Impedance	50 Ω
Insulation Resistance	5000 M Ω
Operating Frequency	DC~18GHz
Dielectric Withstanding Voltage	750V
VSWR	$\leq 1.15@18G$
Insertion Loss	$\leq 0.06 * \sqrt{f(GHz)}$ dB
Operating Temperature	- 55~+125 $^{\circ}C$

Material & Coat-Plating

Inner Conductor	Be-Cu, Gold Plated
Dielectric	PTFE
Body	Stainless Steel, Passivated
Coupling Nut	NA

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Suzhou Talent Microwave, Inc			
		CHK				
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC ± 0.25 1 PLC ± 0.15 2 PLC ± 0.12 3 PLC $\pm$ 3 PLC $\pm$ ANGLES $\pm 1^{\circ}$	APVD	Product Model SSMA/SMA-KK SSMA Female To SMA Female Straight Adaptor			
		PRODUCT SPEC				
		APPLICATION SPEC				
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SIZE A4	GAGE CODE 0T8L4	DRAWING NO	
CUSTOMER DRAWING					SHEET 1 OF 1	RVE 1