
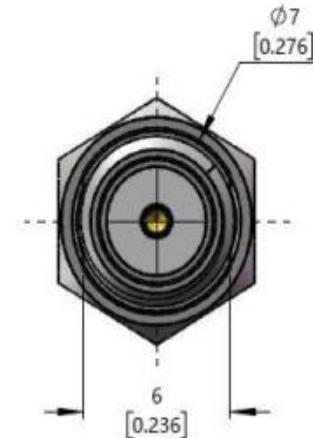


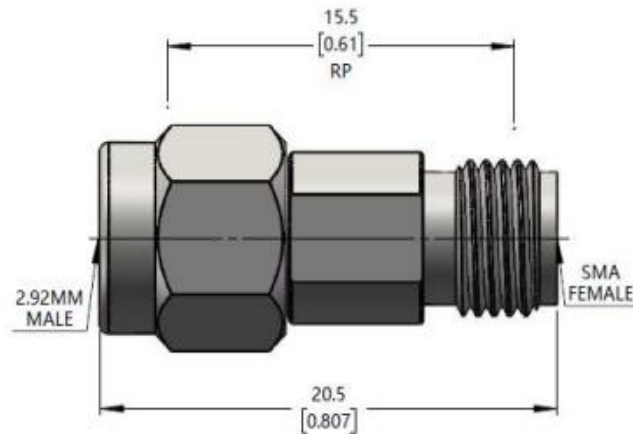

Electrical & Environmental Characteristics

Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC-26.5GHz
Dielectric Withstanding Voltage	1000V
VSWR	1.15 typ
Insertion Loss	≤0.05* $\sqrt{f_GHz}$
Operating Temperature	- 55~+165 °C

Material & Coat-Plating

Inner Conductor	Beryllium Copper, Gold
Dielectric	PTFE
Body/Nut	Stainless Steel, Passivated

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Suzhou Talent Microwave,Inc						
		CHK							
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 3 PLC ± 3 PLC ± ANGLES ±1°	APVD	Product Model 2.92/SMA-JK 2.92 Male to SMA Female Adaptor						
		PRODUCT SPEC							
		APPLICATO N SPEC							
		SIZE A4						GAGE CODE 0T8L4	DRAWING NO
MATEIAL SEE TABLE		FINISH SEE TABLE						WEIGHT	CUSTOMER DRAWING