

D-Band Power Amplifier

WR-06/110-170GHz /20dB Gain/18 dBm Psat

Model: TMPA-110170-2018-06

TMPA-110170-2018-06 is a D-Band power amplifier with a typical small signal gain of 20 dB and a nominal Psat of 18 dBm across the frequency range of 110 to 170 GHz. The DC power requirement for the amplifier is +12 VDC/200 mA. The input and output port configuration offers an inline structure with WR-06 waveguides and UG-387/U-M antickocking flanges.

Features:

- Ultra Wide Band: 110-170 GHz
- Gain: 20dB Typ
- Output Power Psat: 18dBm Typ
- Good Power and Gain Flatness

Applications:

- Passive Imaging
- Communication Systems
- Radar Systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	110-170			GHz
Small Signal Gain		20		dB
Output Psat		18		dBm
Input VSWR		3		:1
Output VSWR		3		:1
DC Voltage		12		V DC
DC Supply Current		200		mA

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	WR-06/UG-387/U	
DC Bias	Solder Pin	
Size	35.2*30*23	mm
Weight	/	g

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+15 V
RF Input Power	+15 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

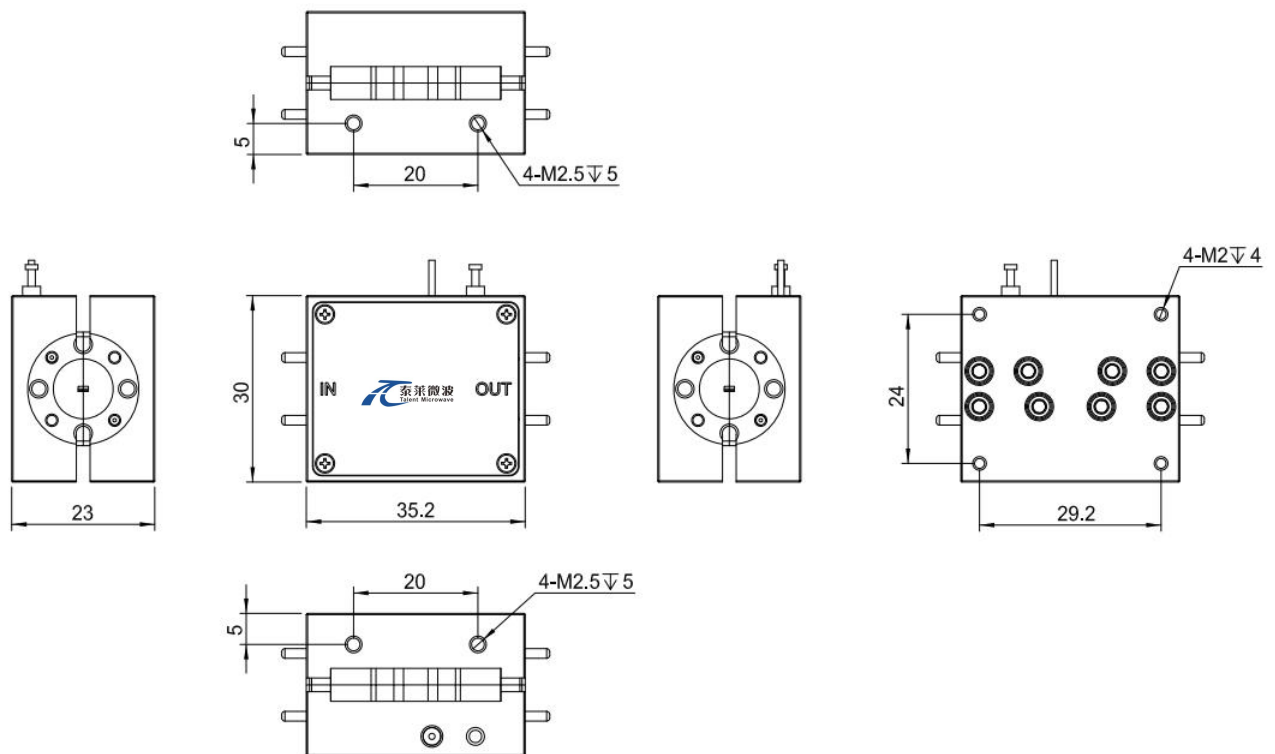


Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TMPA-110170-2018-06	D-band Power Amplifier, 110-170 GHz, Gain:20 dB Type, Psat:18 dBm Type, +12 V DC, WR-06	Rev.1.1


Typical Performance Data:

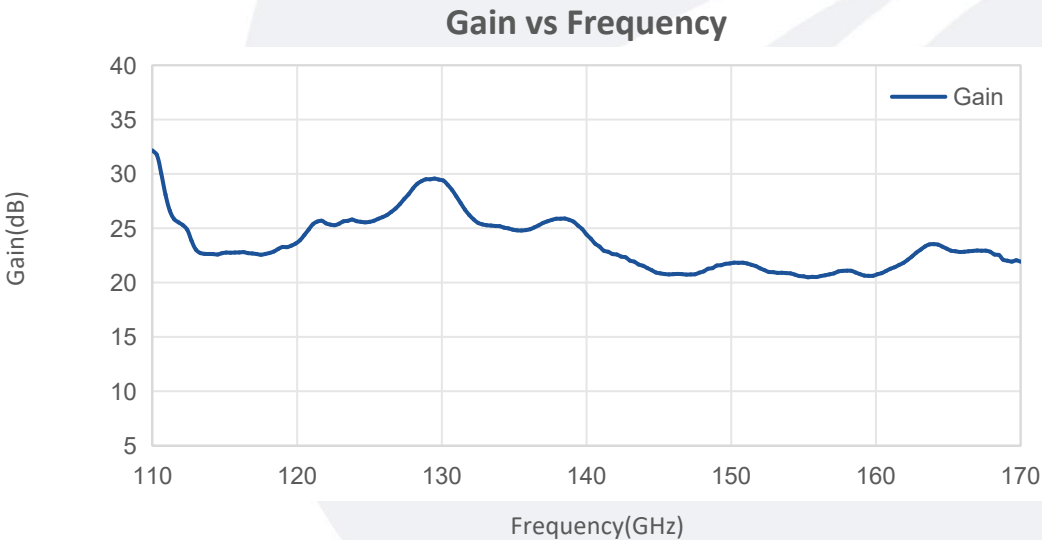


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

VSWR vs Frequency

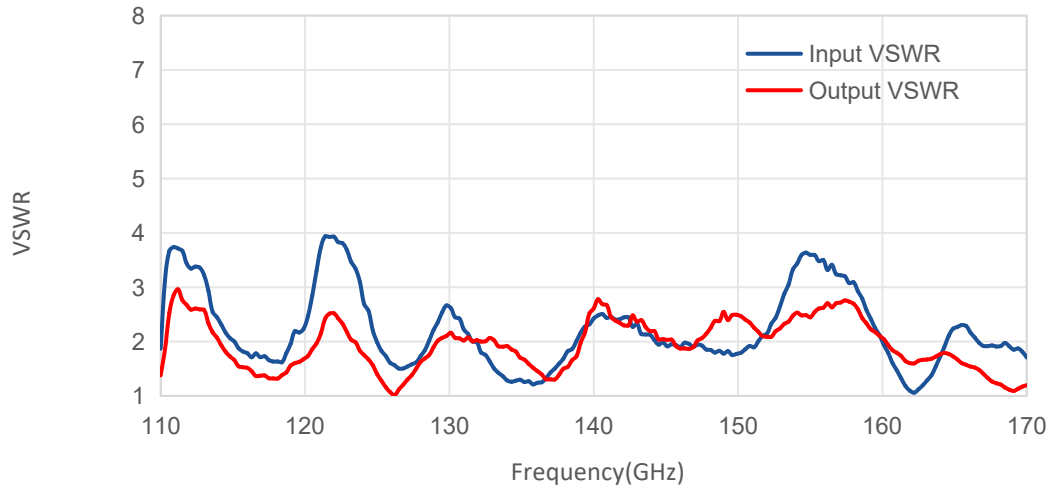

Psat vs Frequency

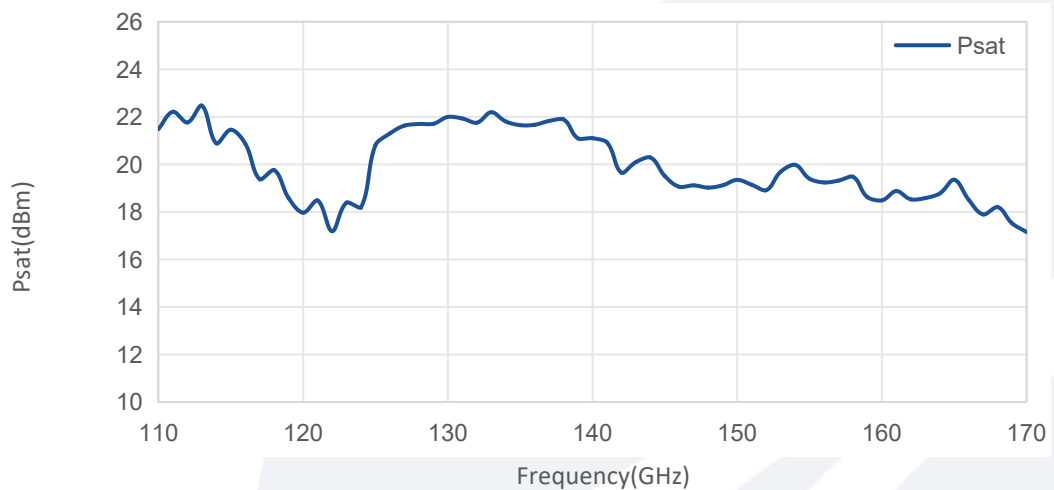

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.