

W-Band Power Amplifier

WR-10/75-110GHz /35dB Gain/28 dBm Psat**Model: TMPA-075110-3528-10**

TMPA-075110-3528-10 is a W-Band power amplifier with a typical small signal gain of 35 dB and a nominal Psat of 28 dBm across the frequency range of 75 to 110 GHz. The DC power requirement for the amplifier is +16 VDC/1 A. The input and output port configuration offers an inline structure with WR-10 waveguides and UG-383/U-M anticocking flanges.

Features:

- Ultra Wide Band: 75-110 GHz
- Gain: 35dB Typ
- Output Power Psat: 28dBm Typ
- Good Power and Gain Flatness

Applications:

- Passive Imaging
- Communication Systems
- Radar Systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	75-110			GHz
Small Signal Gain		35		dB
Power Gain	24	25		dB
Output Psat	27	28		dBm
Input VSWR		2		:1
Output VSWR		2.2		:1
DC Voltage		16	18	V DC
DC Supply Current		1		A

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	WR-10/UG-387/U	
DC Bias	Solder Pin	
Size	56*54*24(Without Heatsink) 87*54*68(With Heatsink)	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	TBD
RF Input Power	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

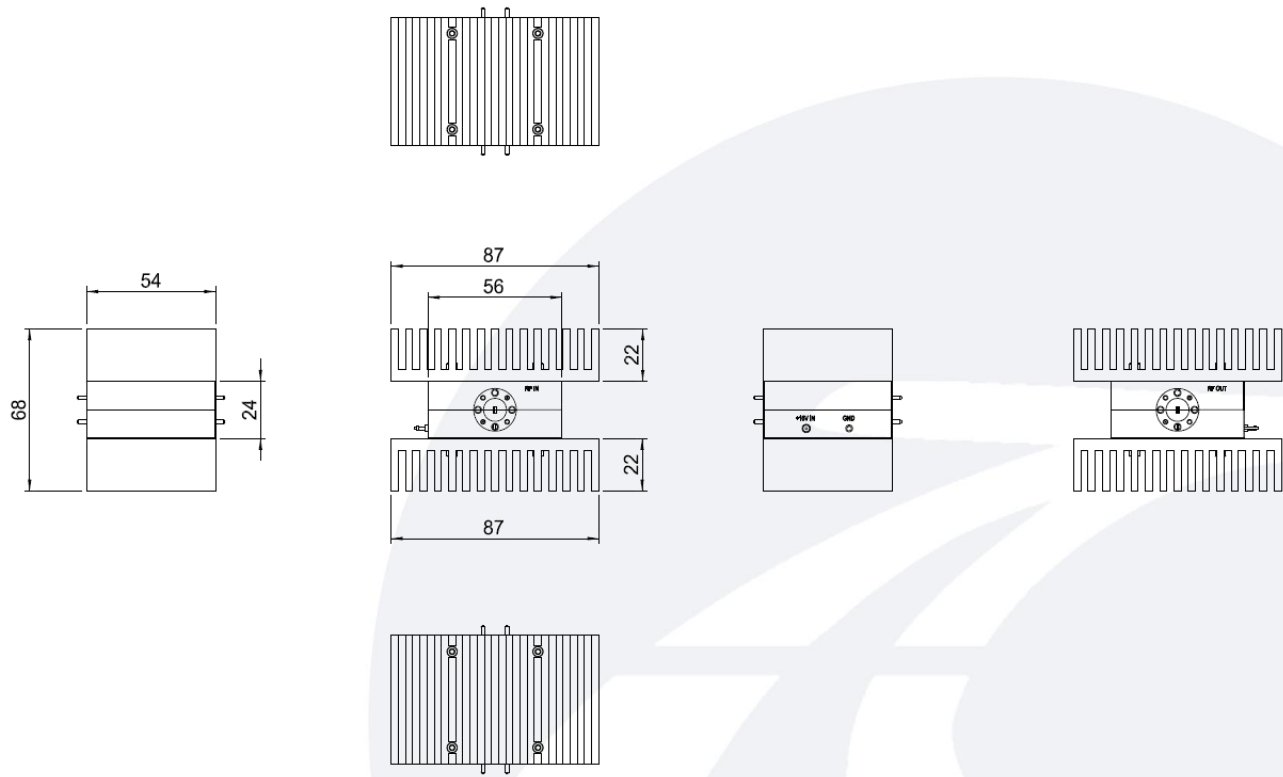

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TMPA-075110-3528-10	Power Amplifier, 75-110 GHz, Gain:35 dB Type, Psat:28dBm Typ, +16V DC,WR-10,Without Heatsink	Rev.1.1
TMPA-075110-3528-10-HS	Power Amplifier, 75-110 GHz, Gain:35 dB Type, Psat:28dBm Typ, +16V DC,WR-10,With Heatsink	Rev.1.1