

V-Band VNA Frequency Receiver Extender 50-75GHz /WR-15

Model: TLRE-5075

TLRE-5075 frequency extenders are a compact coaxial vector network analyzer (VNA) frequency extender receiver (RX) module that extends lower frequency VNA signals to 50 to 75 GHz.

Features:

- Ultra Wide Band: 50-75 GHz
- Conversion loss: 9 dBm Typ
- Unconditional stability

Applications:

- Transmit Extension
- Material characterisation


Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	50		75	GHz
RF Input Power		-10	0	dBm
LO Input Frequency	12.5		18.75	GHz
LO Input Power	3	7	10	dBm
IF Frequency Range	DC		30	GHz
Conversion Loss		9		dB
Multiplication Factor		4		


Absolute Maximum Ratings :

Description	Parameter	Units
RF Port Damage Level	0	dBm
LO Port Damage Level	+10	dBm
ESD sensitivity (HBm)	Class 0, passed 150V	
Supply Bias AC Voltage	240	V

Outline Drawing(Attenuator Optional): Unit:mm

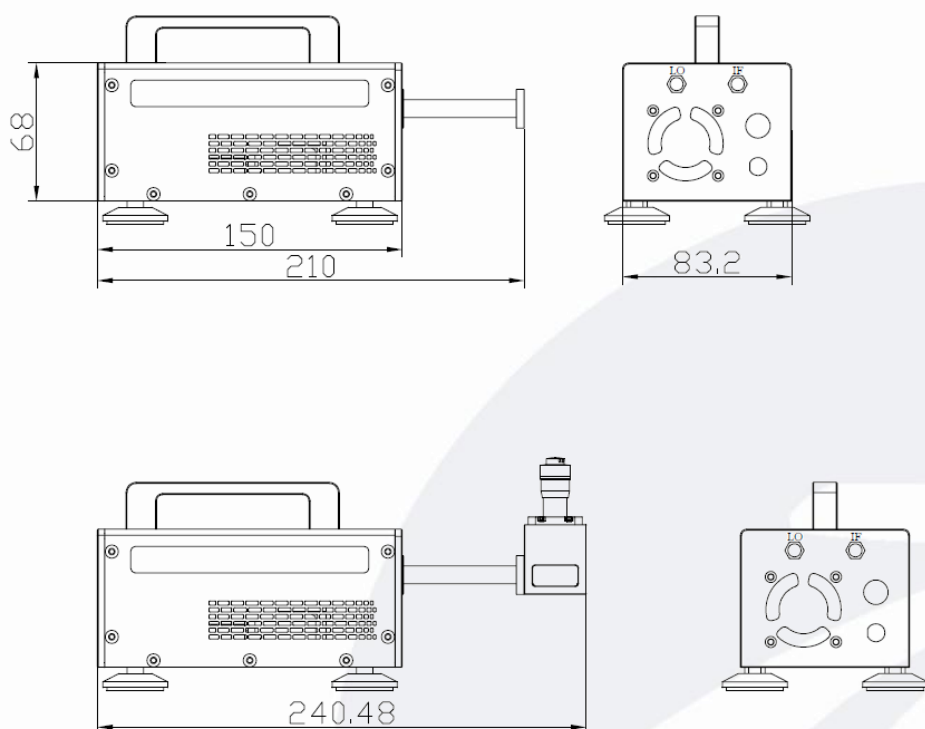

Block Diagrams:

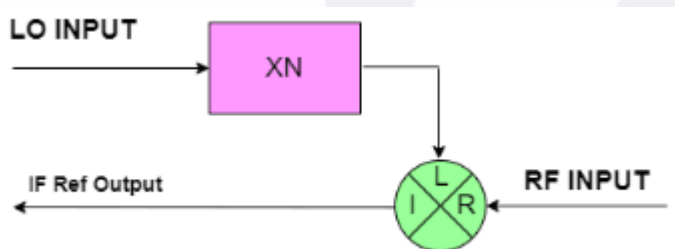

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	0 To +45	°C
Storage Temerature	-55 to +125	°C
Material	Al	
Finish	Gray spray paint	
Size	150*83.2*68	mm

Connector Information:

Parameter	Value
RF Input Connector	WR-15/UG-385/U
LO Input Connector	SMA Female
IF Output Connector	2.92mm Female
Power Supply Pin	FGG 0B 4 Core

Ordering Information:

Part Number	Description	Revision
TLRE-5075	Receiver Extender, 50-75 GHz, Conversion Loss:9dB typ.	Rev.1.1

Components Included:

Part Number	Description	Quantity
TLACTDC-22012	AC-to-DC Power Adapter	1 PCS

Notes:

1. Dimensions and specifications may be changed without prior notice.
2. Standard Warranty:three years.