

W-Band Power Amplifier

WR-10/75-110GHz /33dB Gain/34 dBm Psat**Model: TMPA-075110-3334-10**

TMPA-075110-3334-10 is a W-Band power amplifier with a typical power gain of 33 dB and a nominal Psat of 34 dBm across the frequency range of 75 to 110 GHz. The DC power requirement for the amplifier is +18 VDC/10 A. The input and output port configuration offers an inline structure with WR-10 waveguides and UG-387/U-M anticocking flanges.

Features:

- Ultra Wide Band: 75-110 GHz
- Gain: 33dB Typ
- Output Power Psat: 34dBm Typ
- Good Power and Gain Flatness

Applications:

- Passive Imaging
- Communication Systems
- Radar Systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	75-110			GHz
Power Gain	30	33		dB
Output Psat	33	34		dBm
Input VSWR		2		:1
Output VSWR		2		:1
DC Voltage	17.5	18	18.5	V DC
DC Supply Current		10	16	A

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	WR-10/UG-387/U	
DC Bias	J30J-31ZKP	Pin1~16:+18V Pin17~31:GND
Size	260mm×200mm×150mm	mm
Weight	/	g

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+18.5 V
RF Input Power	+13 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

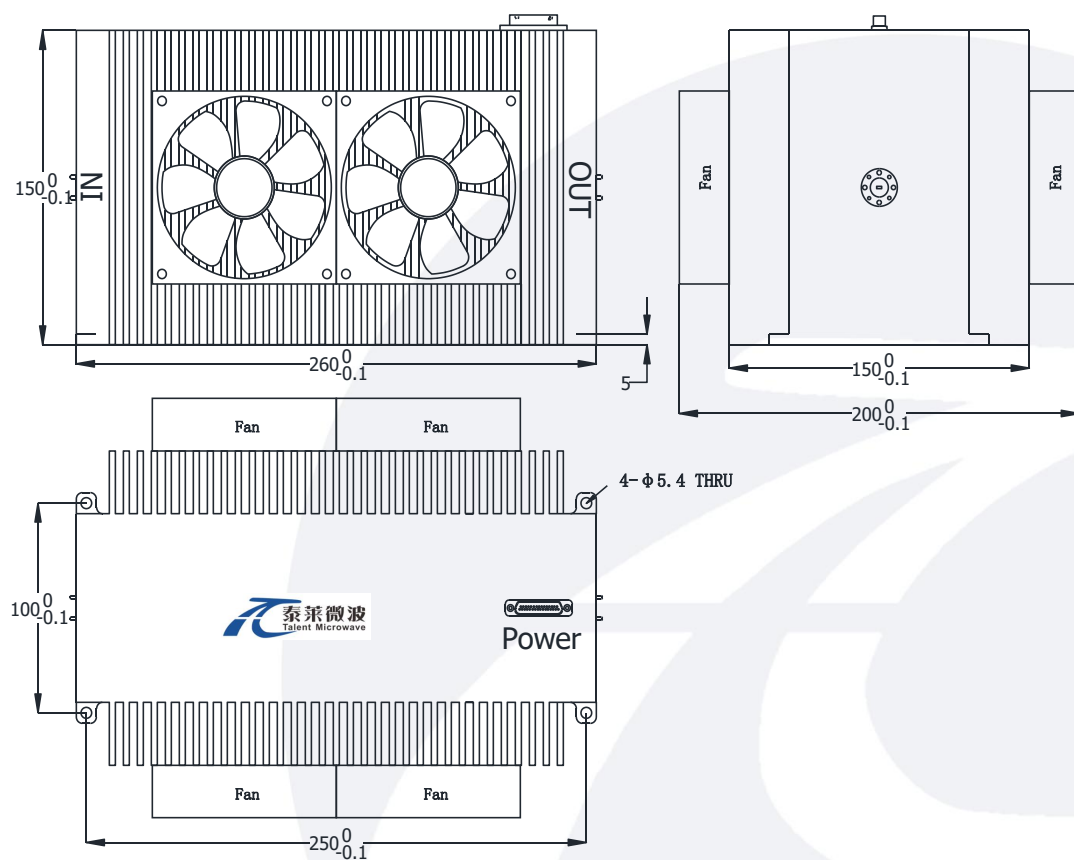

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	+10		+40	°C
Non-operating Temperature	0		+50	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TMPA-075110-3334-10	Power Amplifier, 75-110 GHz, Gain:33 dB Type, Psat:34 dBm Type, +18V DC,WR-10	Rev.1.1