

Coaxial Termination

DC-50GHz/2.4mm Female/2W

Model: TT2-50-2.4-S-F

Features:

- Operating Frequency DC to 50 GHz
- High Return Loss
- Instrumentation Grade

Applications:

- laboratory test
- Communication equipment



Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Frequency Range	DC		50	GHz
VSWR			1.3	:1
Power Handling			2	W
Impedance		50		Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-55 To +125	°C
Storage Temerature	-55 to +125	°C
Body Material	Stainless Steel 303	
Center Conductor	Becu, Golden	
Connectors	2.4mm Female	
Relative Humidity	≤90%	

Outline Drawing:

Unit:mm

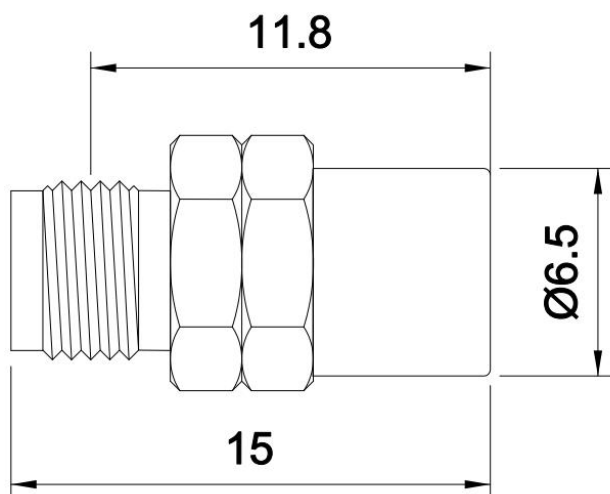


Ordering Information:

Base Number	Description
TT2-50-2.4-S-F	DC-50GHz,2W,2.4mm Female Coaxial Termination

Typical Performance Data:

VSWR vs Frequency

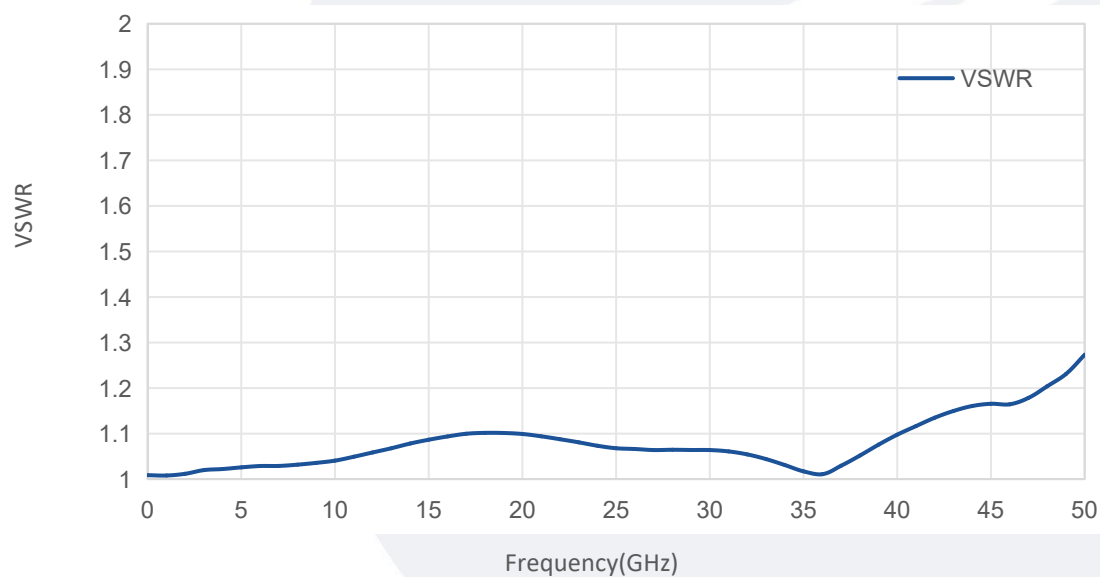

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.