泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Low Noise Amplifier

50KHz-20GHz/3.0dB NF/35dB Gain/15dBm P1dB

Model: TLLA50K20G-35-30

TLLA50K20G-35-30 is a low noise amplifier with a typical small signal gain of 35 dB and a nominal noise figure of 3.0 dB across the frequency range of 50KHz to 20 GHz. The DC power requirement for the amplifier is +12 V DC/150 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Ultra Wide Band:50KHz-20GHz
- Gain: 35dB Min
- Noise Figure: 3.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range		50KHz-20GHz		
Gain	35	37		dB
Gain Flatness		±1.5		dB
Noise Figure		3		dB
Output P1dB		15		dBm
Input VSWR			2	:1
Output VSWR			2	:1
DC Voltage	+10	+12	+15	V DC
DC Supply Current		150		mA
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	44.8*29.2*11	mm
Weight	55	g

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+15 V
RF Input Power	+15 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

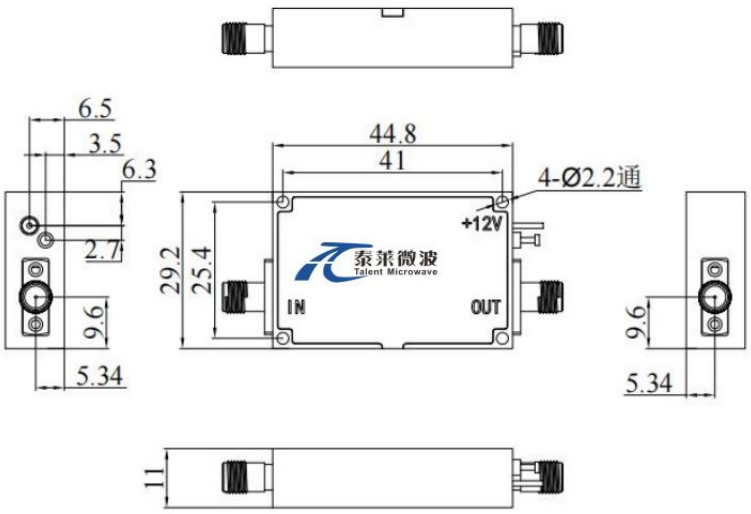

***Heat Sink Required During Operation

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	℃
Non-operating Temperature	-55		+125	℃
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Ordering Information:

Base Number	Desciption	Revision
TLLA50K20G-35-30	Low Noise Amplifier, 50K-20GHz, Noise Figure:3.0dB, Gain:35 dB,P1dB:15dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA50K20G-35-30-HS	Low Noise Amplifier, 50K-20GHz, Noise Figure:3.0dB, Gain:35 dB,P1dB:15dBm,+12V DC,With Heatsink	Rev.1.1

Typical Performance Data:

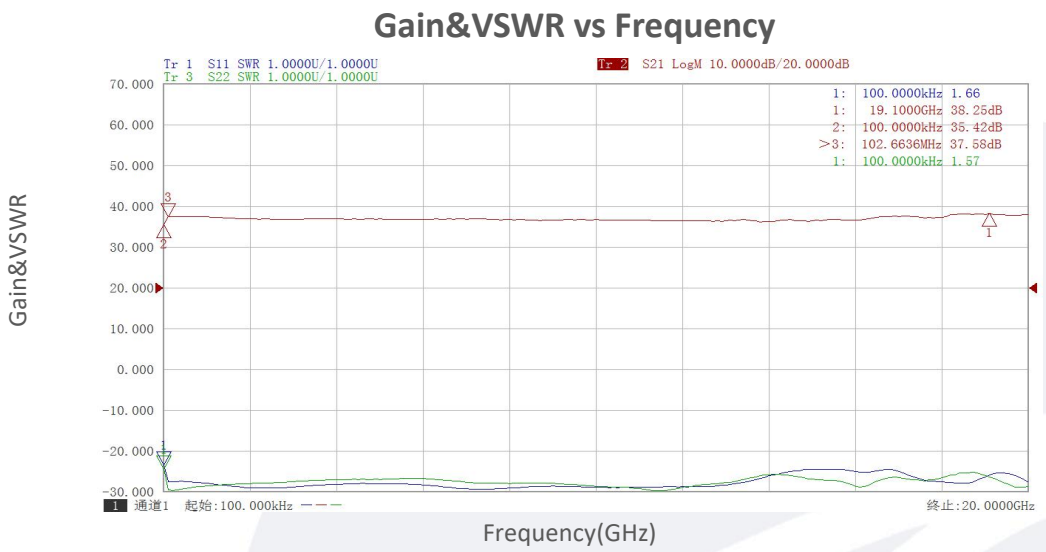

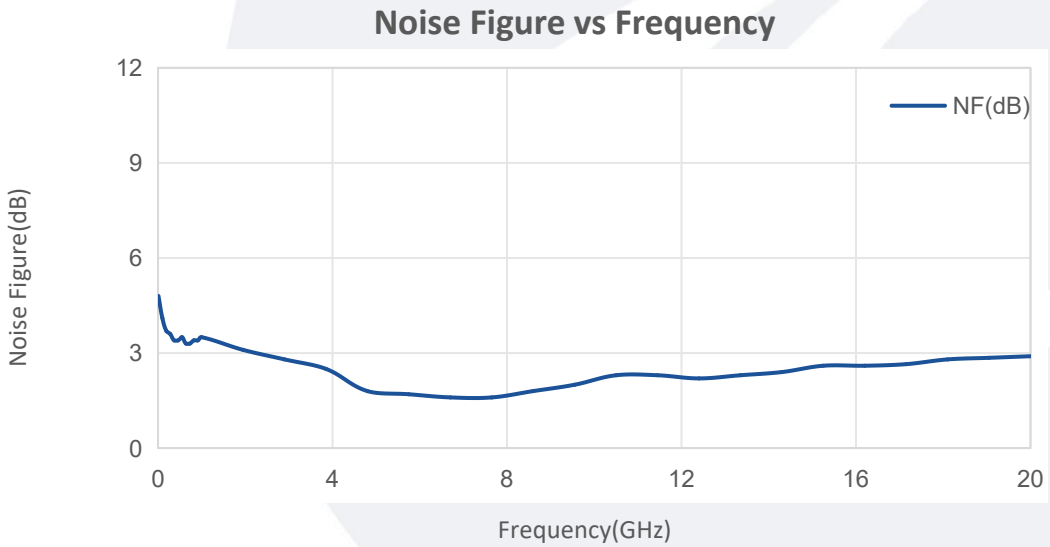

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

Gain vs Output Power

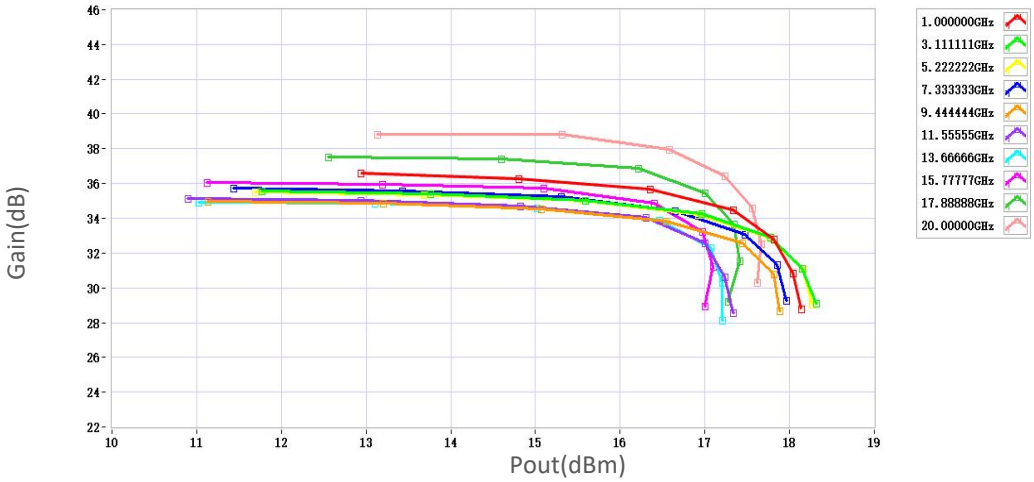

P1dB vs Frequency

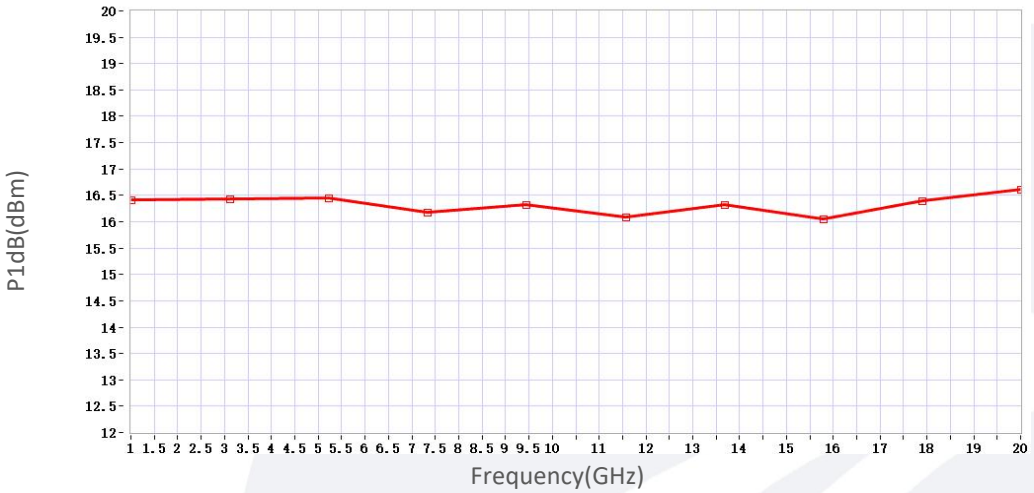

P3dB vs Frequency

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

典型曲线 Typical Performance Data:

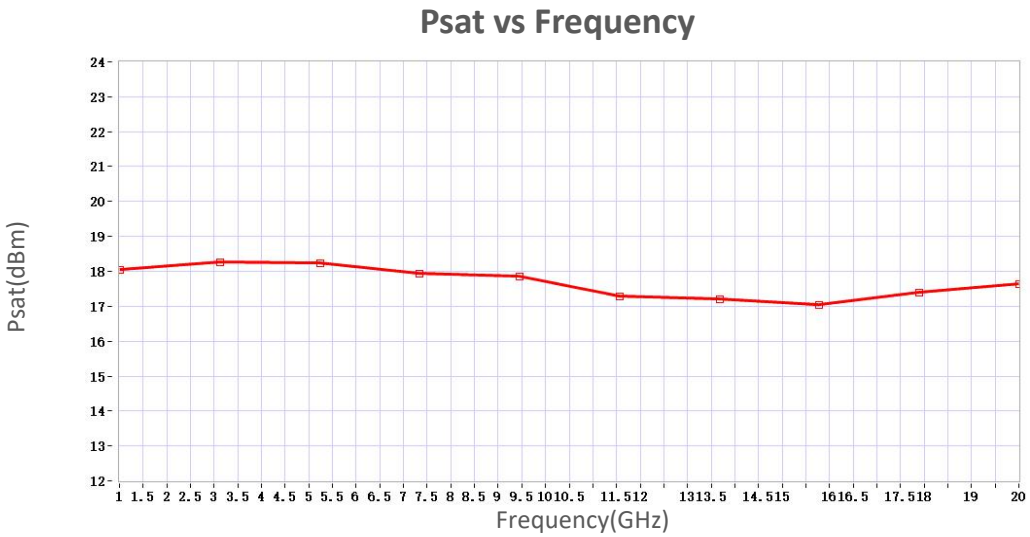

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.