

Part No: TDCB1M1F-3

50KHz-110GHz, 16V, 1.0mm Male-Female DC Block

Electrical:


Frequency:	50KHz-110GHz
Insertion Loss:	2.5 dBMax
VSWR:	1.95Max, 1.5 typ
Group Delay	74.3ps typ
DC Voltage:	16 VOLTS typ
Power Handling:	+27dBm
Impedance:	50 OHMS

Mechanical:

Operation Temperature:	-45~+70°C
Storage Temperature:	-55~+125°C
Body Material:	Golden Plated Copper
Center conductor:	Becu, Golden
Connectors:	1.0mm Male to Female
Relative Humidity:	0 ~ 90%

Outline Drawing:

Unit: mm

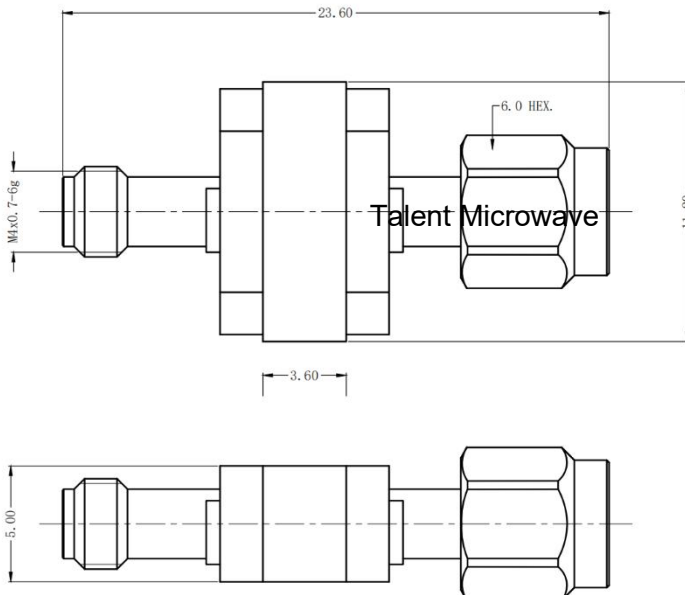

Test Curve:

