

Equalizer

DC-20GHz /3dB,Insertion Loss

Model: TLME-DC20G-3

The TLME-DC20G-3 is a equalizer. It is a positive gain slope equalizer designed to pass DC to 20GHz. Equalization can be applied to reduce low pass filtering effects in both RF/microwave and high speed digital systems.

Features:

- Ultra Wide Band: DC-20 GHz
- Good gain equalization
- Small Size and simple to use
- Excellent return loss

Applications:

- Cable or Waveguide Loss Compensation
- Amplifier Flatness Compensation
- Microwave Radio
- RF Transceivers
- Telecom Infrastructure

电气特性 Electrical Characteristics:


参数 Parameter		Min	Typ	Max	单位 Units
频率范围 Frequency range		DC-20			GHz
插损 Insertion Loss	@DC		3		dB
	@20GHz		0.5		
回波损耗 Return Loss			-18		dB
耐受功率 Power Handling			30		dBm
阻抗 Impedance		50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.92mm	
长度 Length	42.2	mm

外形图 Outline Drawing:


Unit:mm

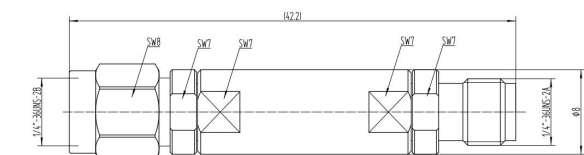

TLME-DC20G-3

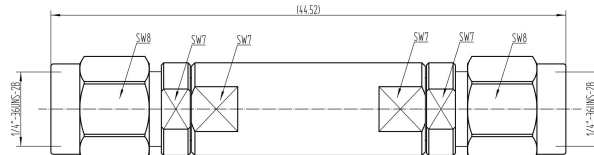

TLME-DC20G-3-MM

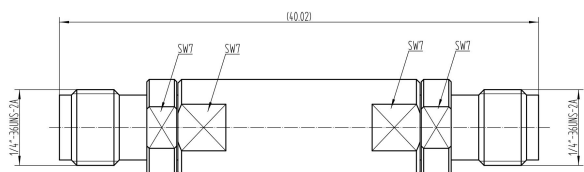

TLME-DC20G-3-FF

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Base Number	描述 Desciption	版本号 Revision
TLME-DC20G-3	Equalizer, DC-20GHz, Insertion loss:3dB@DC; 0.5dB@20GHz 2.92mm Male/2.92mm Female	Rev.1.1
TLME-DC20G-3-MM	Equalizer, DC-20GHz, Insertion loss:3dB@DC; 0.5dB@20GHz 2.92mm Male/2.92mm Male	Rev.1.1
TLME-DC20G-3-FF	Equalizer, DC-20GHz, Insertion loss:3dB@DC; 0.5dB@20GHz 2.92mm Female/2.92mm Female	Rev.1.1

典型曲线 Typical Performance Data:

Return Loss vs Frequency

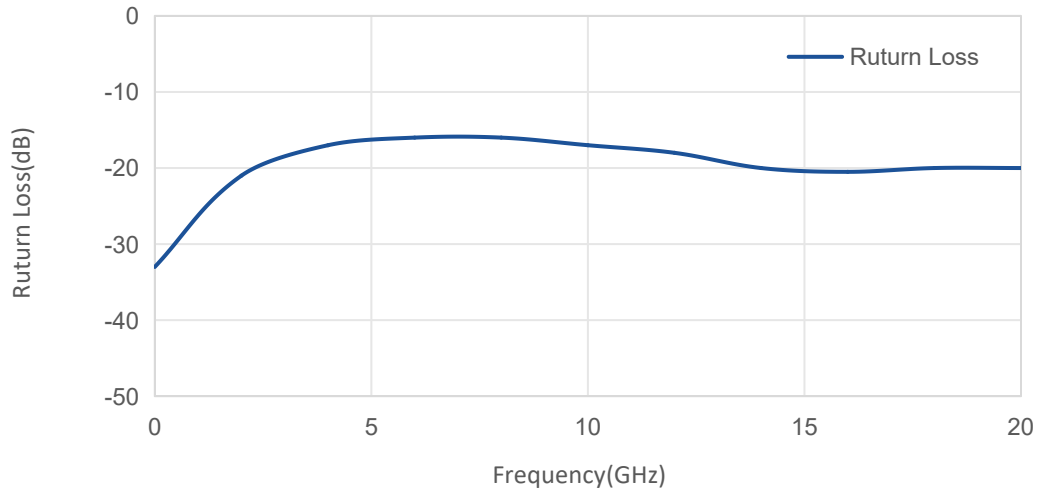

Insertion Loss vs Frequency

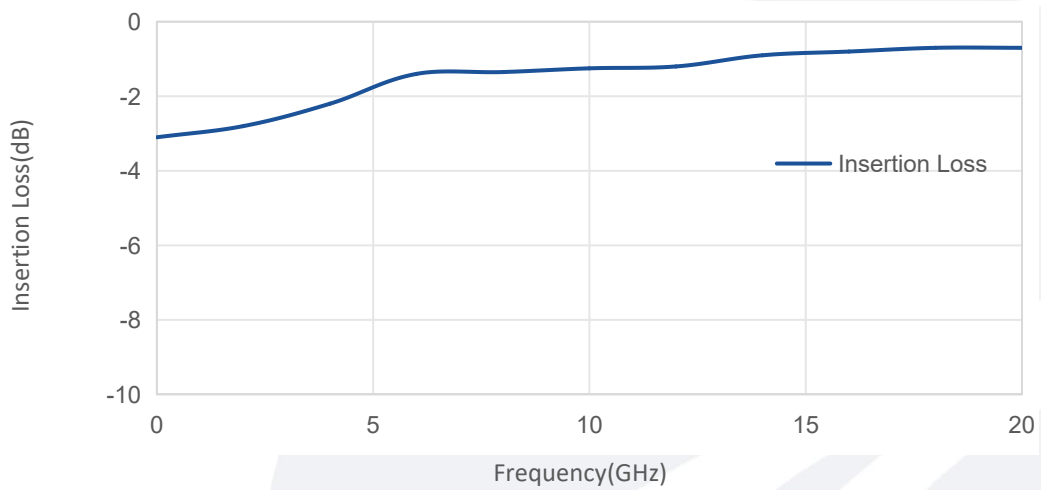

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.