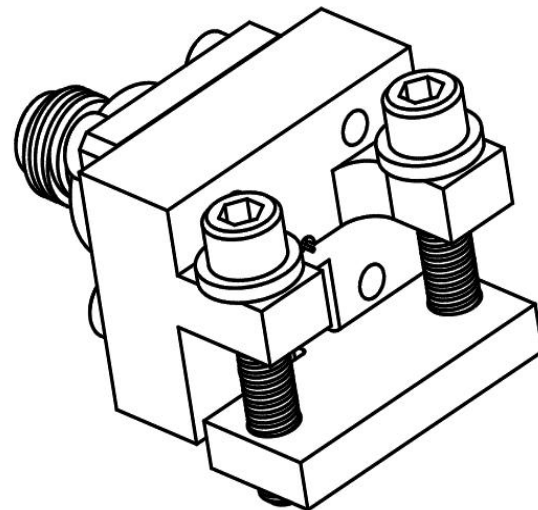
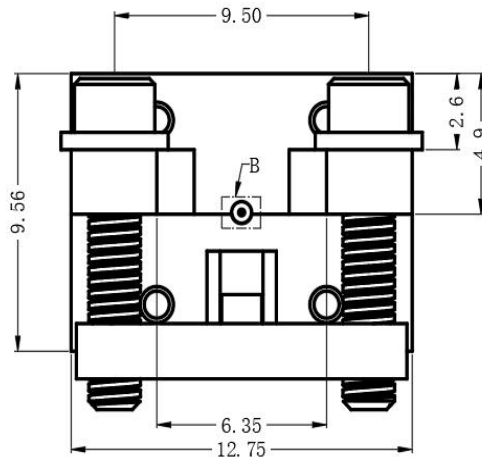
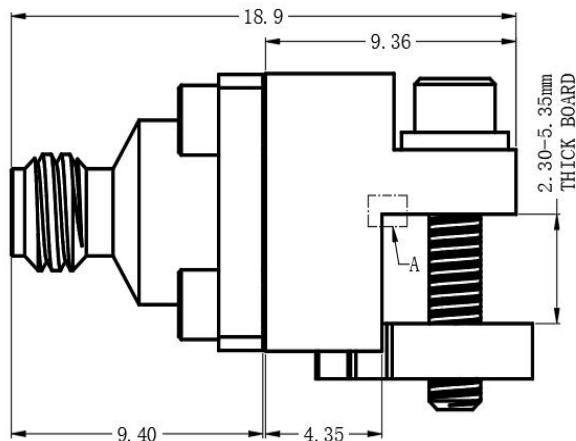


Electrical & Environmental Characteristics

Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~110GHz
VSWR	≤1.40
Operating Temperature	- 55~+125℃
Durability	200Times

Material & Coat-Plating

Inner Conductor	BE-CU, Gold Plated
Dielectric	PEI&PTFE
Body	Stainless steel, Passivation

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN

CHK

Suzhou Talent Microwave,Inc

Unit
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED
0 PLC ±0.25
1 PLC ±0.15
2 PLC ±0.12
3 PLC ±
3 PLC ±
ANGLES ±1°

APVD

PRODUCT SPEC

APPLICATION SPEC

Product Model

1.0-KFDEL13
1.0mm Female Flange Connector

MATERIAL
SEE TABLE

FINISH
SEE TABLE

WEIGHT

SIZE
A4

GAGE CODE
0T8L4

DRAWING NO

CUSTOMER DRAWING

SHEET1 OF 1

RVE 1