

Low Phase Noise Amplifier

0.01-20GHz /12dB Gain/+23dBm P1dB

Model: TLPNA0.01G20G-12-23

TLPNA0.01G20G-12-23 is a low phase noise driver amplifier across the frequency range of 0.01 to 20 GHz, with a typical small signal gain of 12dB , provide a +23 dBm P1dB. The DC power requirement for the amplifier is +12 V DC/80 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 0.01-20GHz
- Gain: 12dB Typ.
- Output P1dB: +23dB Typ.
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	0.01		20	GHz
Small Signal Gain		12		dB
Phase Noise @10KHz offset		-160		dBc/Hz
Noise Figure		5		dB
Output P1dB		23		dBm
Output IP3		24		dBm
Input VSWR		2.0		:1
Output VSWR		2.0		:1
DC Voltage	+8	+12	+15	V DC
DC Supply Current		80		mA
Impedance	50			Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	44.8*29.2*11	mm
Weight	55	g


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+15 V
RF Input Power	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

Regulatory Compliance:

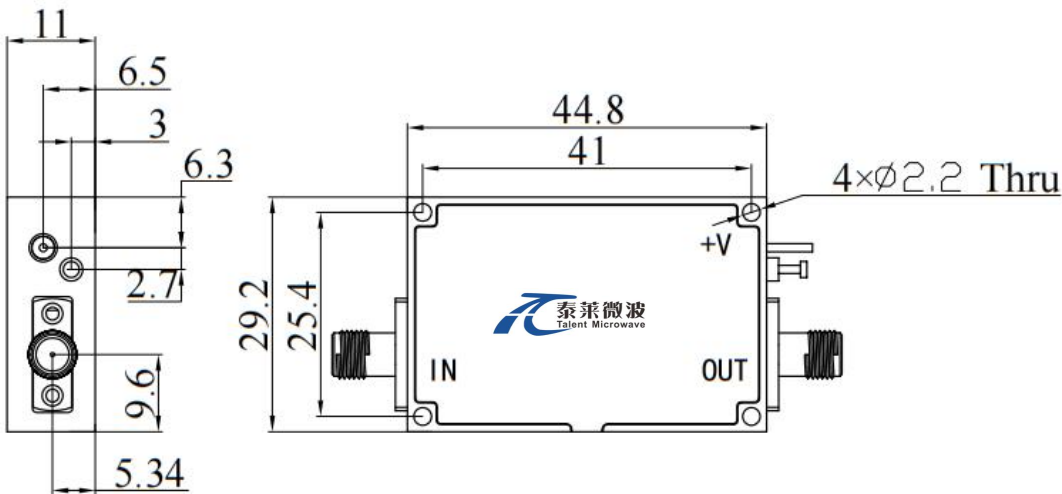

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TLRNA0.01G20G-12-23	Low Phase Noise Amplifier, 0.01-20GHz, Gain:12 dB, Phase Noise:-160dBc/Hz, P1dB:+23dBm,+12V DC, Without Heatsink	Rev.1.1
TLRNA0.01G20G-12-23-HS	Low Phase Noise Amplifier, 0.01-20GHz, Gain:12 dB, Phase Noise:-160dBc/Hz, P1dB:+23dBm,+12V DC, With Heatsink	Rev.1.1