

Solid State High Power Amplifier Systems

18-26.5GHz/50dB Gain/50dBm Psat/220V AC

Model: TLPA18G26.5G-50-50-BC

TLPA18G26.5G-50-50-BC is a solid state high power amplifier systems provides high output power and high gain across the 18 to 26.5 GHz frequency range. The amplifier features a built-in 220V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

Features:

- Frequency range: 18-26.5GHz
- Gain: 50dB Min
- Psat Output Power: 50dBm Min
- Protection: Over TEM, over voltage, over current ,infinite VSWR protection
- 50 Ohm Matched Input / Output



Electrical Characteristics:

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	BW	18-26.5			GHz
Power Gain	GP	50			dB
Gain flatness	ΔGL		± 3		dB
Output Psat	Psat	50			dBm
Spurious@Pout=50dBm	Spur			-60	dBc
Harmonics@Pout=50dBm	HAM			-20	dBc
Input VSWR	VSWRin			2.0	:1
AC Voltage	Vac		220		V AC
Power Consumption	Pdiss			1200	W
Impedance	I/O-IMP	50			Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	2.92mm Female/WR12	
Communication Connector	DB9/RJ45	
Size	19 Inch 4U	
Weight	≤ 35	Kg

Absolute Maximum Ratings:

Parameter	Value
RF Input Power	+5 dBm
ESD sensitivity (HBM)	Class 0, passed 150V

Outline Drawing:

Unit:mm

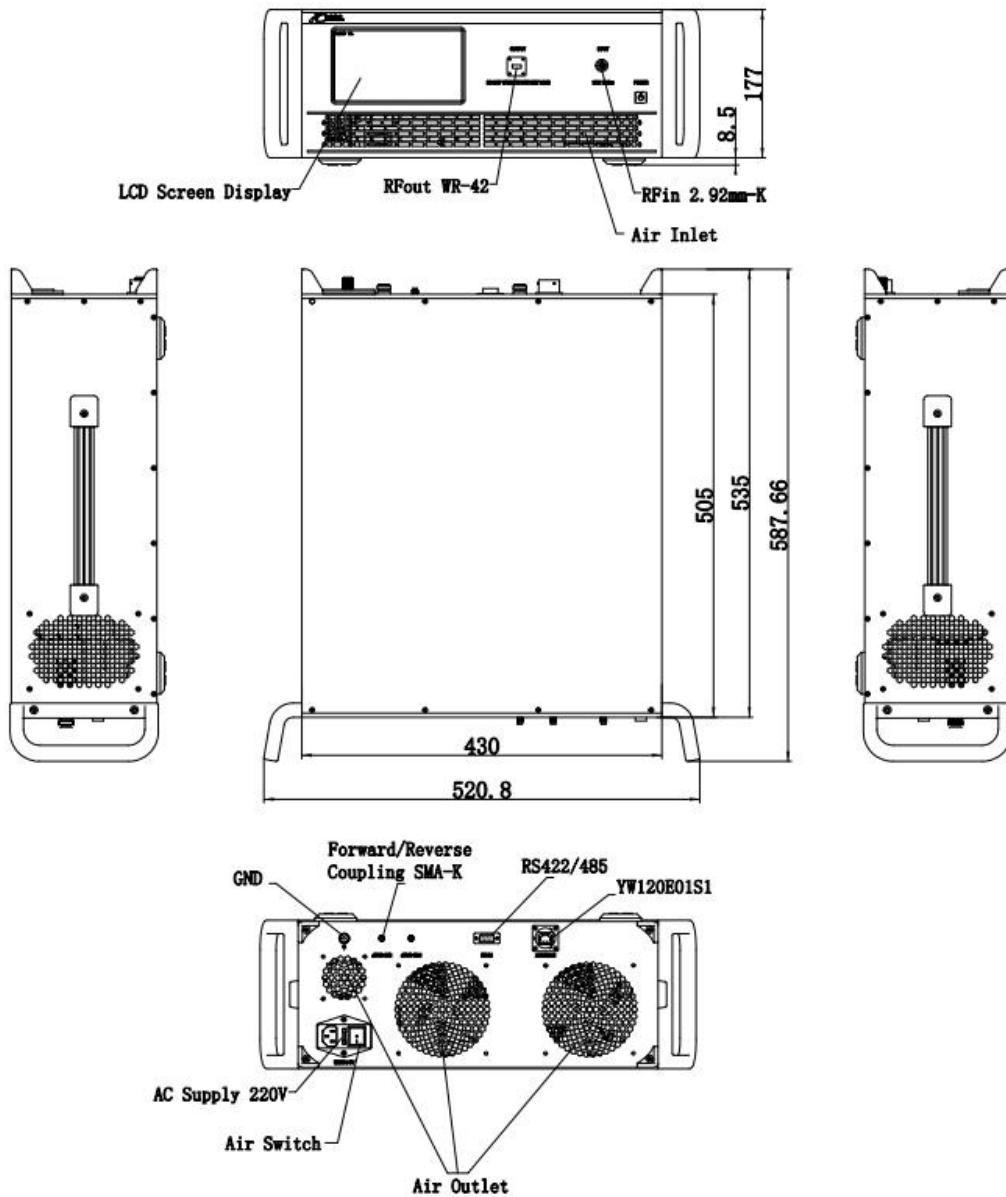

Key Features:

Parameter	Advantages
Control functions	1, Power setting on/off 2, ALC automatic level control
Display functions	1, Output/reflected power 2, Fault informations
Protection functions	1, Over TEM 2, Over voltage 3, Over current 4, Infinite VSWR
Remote control	RS422/Ethernet
Cooling system	Built in Cooling system, forced air cooling

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+40	°C
Non-operating Temperature*	-30		+50	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave, 3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:


Base Number	Description	Revision
TLPA18G26.5G-50-50-BC	Solid State High Power Amplifier Systems 0.5-6GHz, Gain:51dB, Psat:51 dBm, 220V AC, Built in Fan Cooling	Rev.1.1

Typical Performance Data:


Small Signal Gain vs Frequency

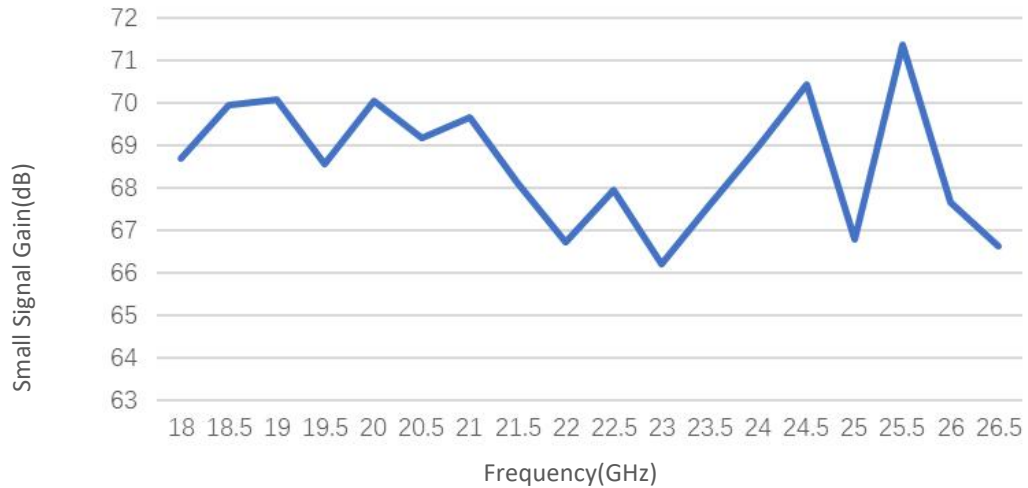

Input VSWR vs Frequency

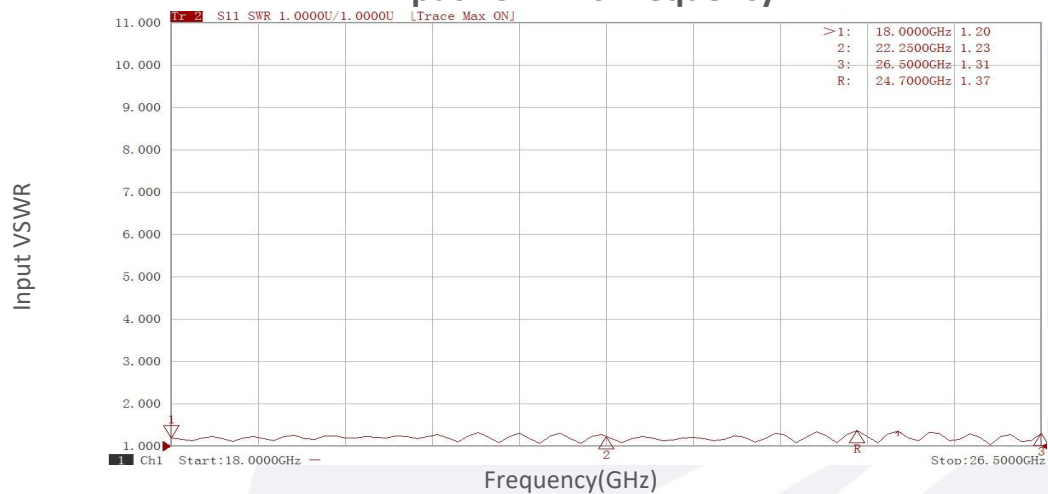


PndB vs Frequency

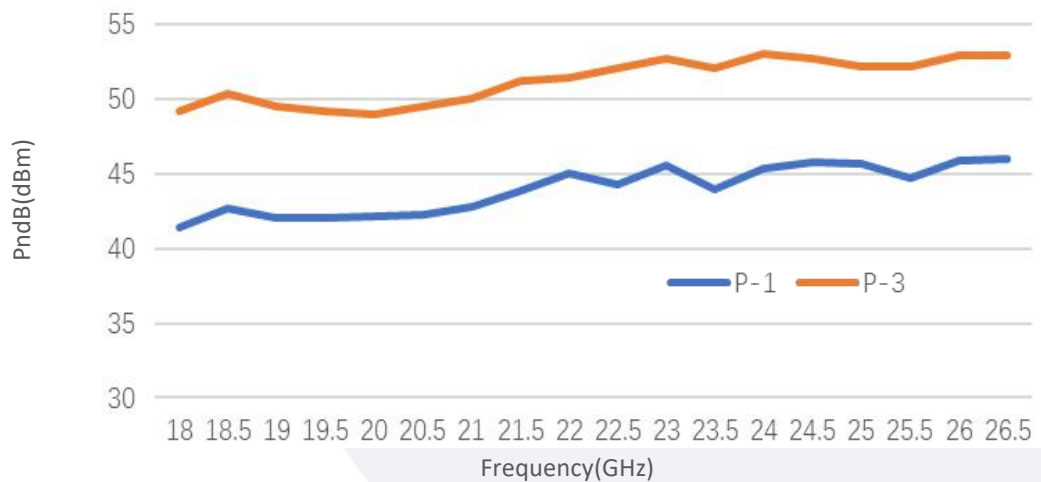


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

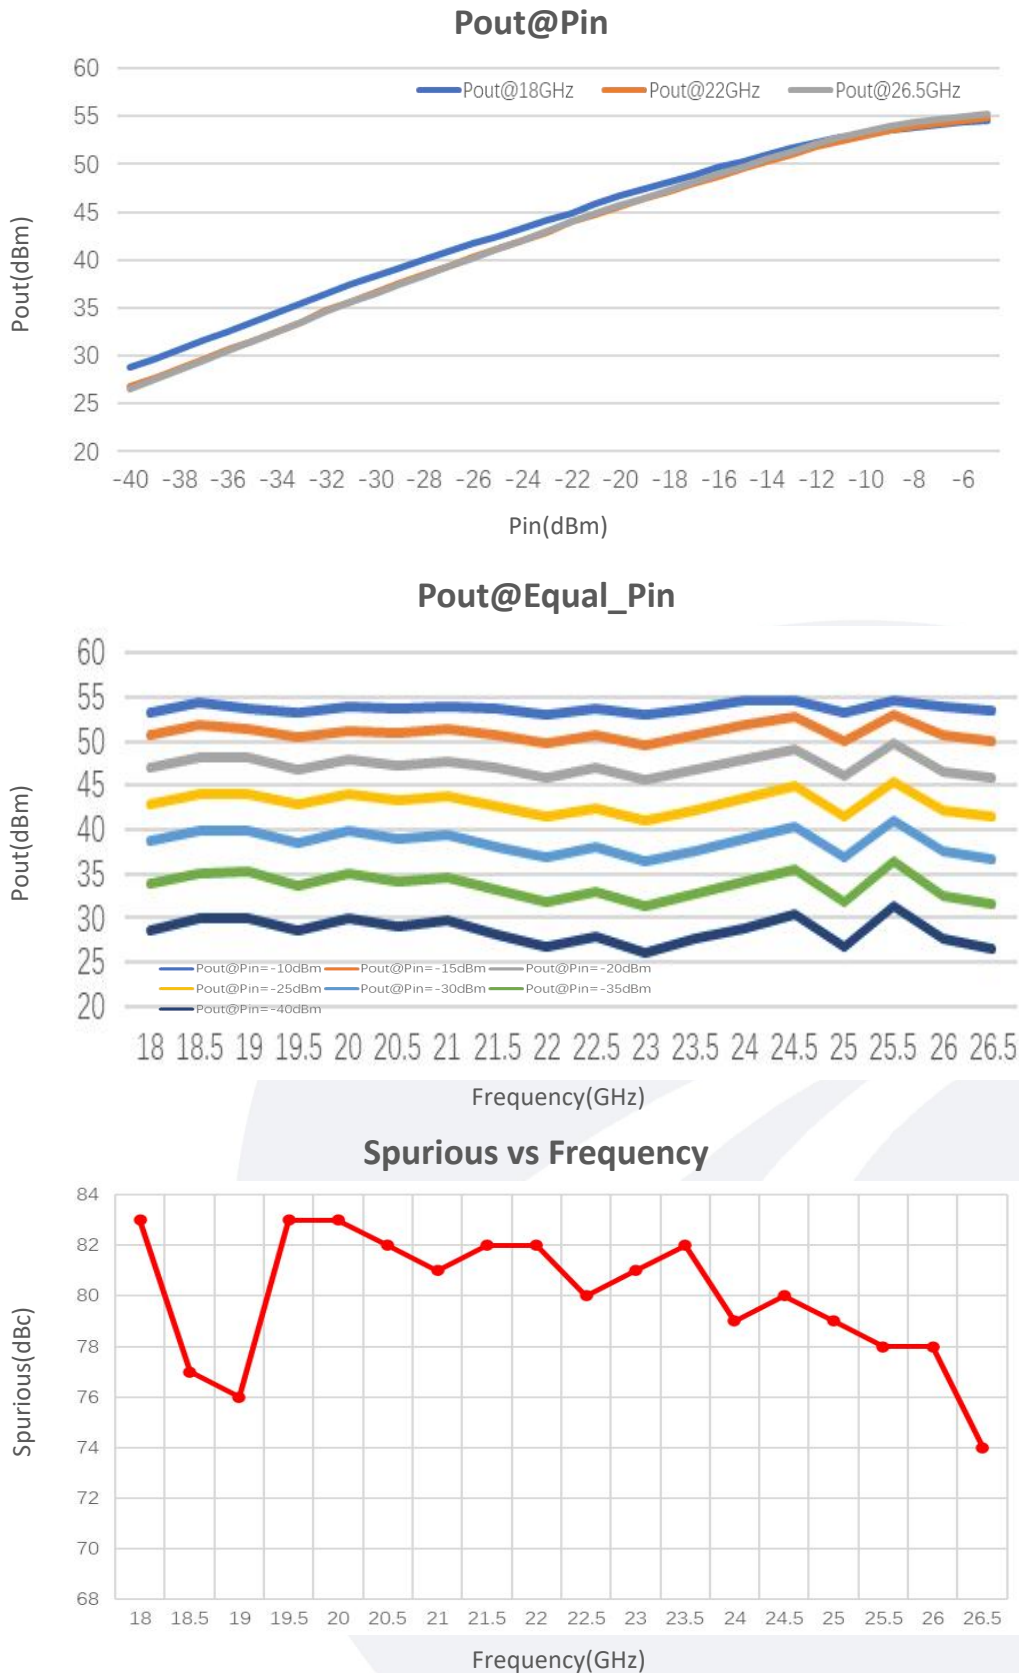

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

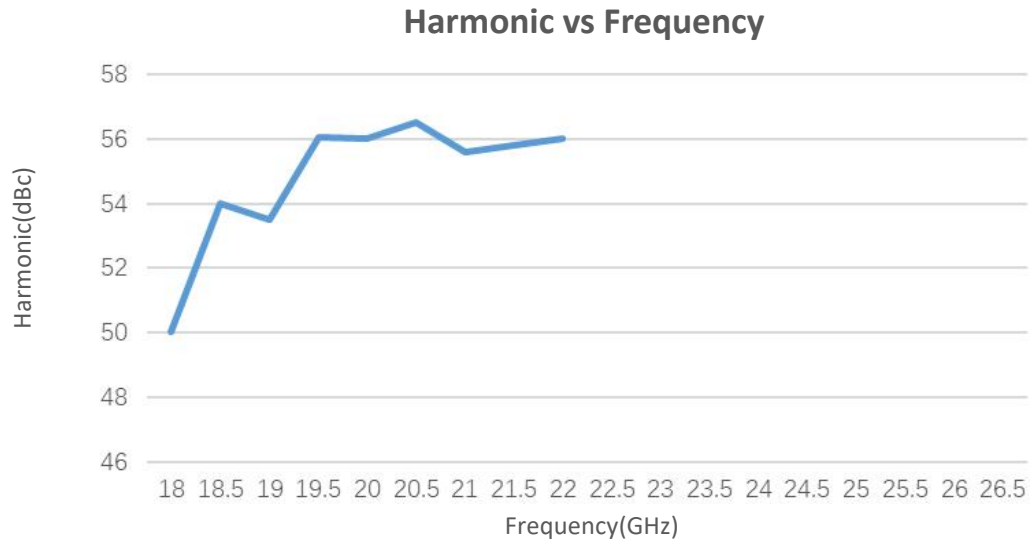

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.