

## F-Band, Active Frequency Multiplier

### WR-08/X12/100-115GHz/10dBm Output Power Model: TMAM-100115-1210-08

TMAM-100115-1210-08 is an active X12 frequency multiplier. The multiplier has an input frequency of 8.33 to 9.59 GHz with a typical input power of 5 dBm and an output frequency of 100 to 115 GHz with a typical output power of +10 dBm. The DC power requirement for the multiplier is +12 V DC/450 mA. The input port configuration is a female SMA connector and the output is a WR-08 waveguide with a UG-387/U-M anti-cocking flange.

#### Features:

- Output Frequency: 100-115GHz
- Output Power: 10dBm Typ
- Low power consumption

#### Applications:

- Frequency Extenders
- THz Systems

#### Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Output Frequency	100		115	GHz
Output Power	8	10	12	dBm
Input Frequency	8.33		9.59	GHz
Input Power	3	5	7	dBm
Multiply Factor		12		
Harmonic Suppression		-20		dBc
DC Voltage		12		V
DC Supply Current		450		mA

#### Mechanical Specifications:


Parameter	Value	Units
Output Connector	WR-08/UG-387/U	
Input Connector	SMA Female	
DC Bias	Solder Pin	
Size	50*28*23	mm

### Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+15 V
RF Input Power	+10dBm
ESD sensitivity (HBm)	Class 0, passed 150V

### Outline Drawing:

Unit:mm

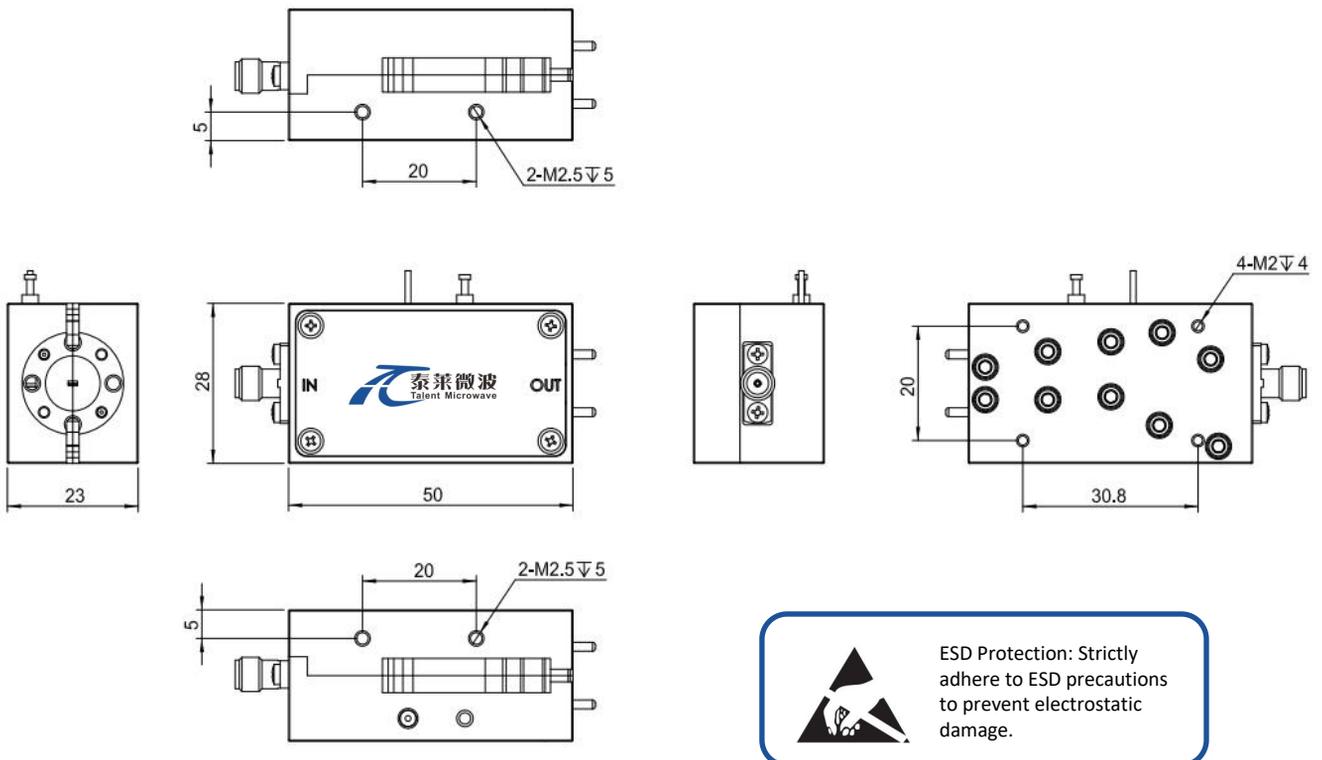

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

### Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	50,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

### Ordering Information:

Base Number	Description	Revision
TMAM-100115-1210-08	Active Multiplier,X12,100-115GHz, Output Power:10dBm,WR-08/UG-387/U,SMA Female	Rev.1.1

### Typical Performance Data:


Output Power vs Frequency

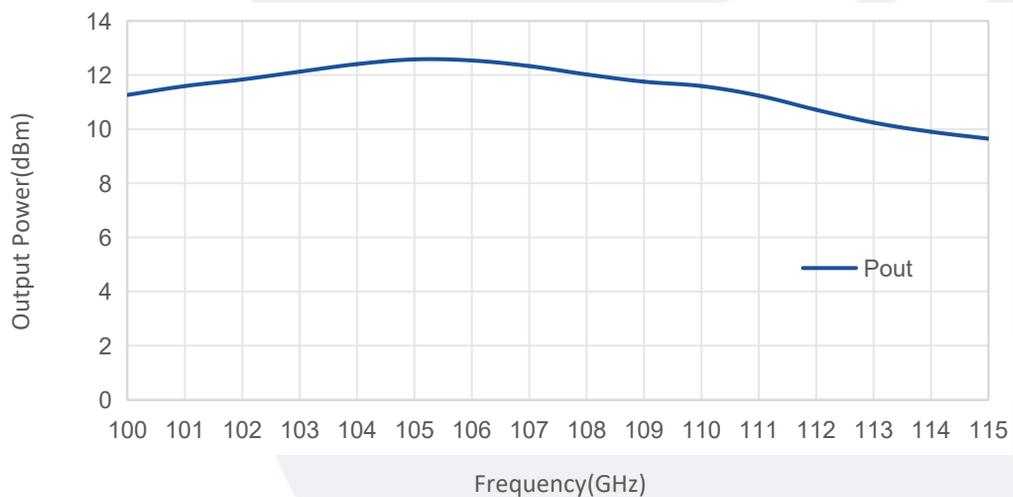

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

## Typical Performance Data:

### Harmonic Suppression vs Frequency

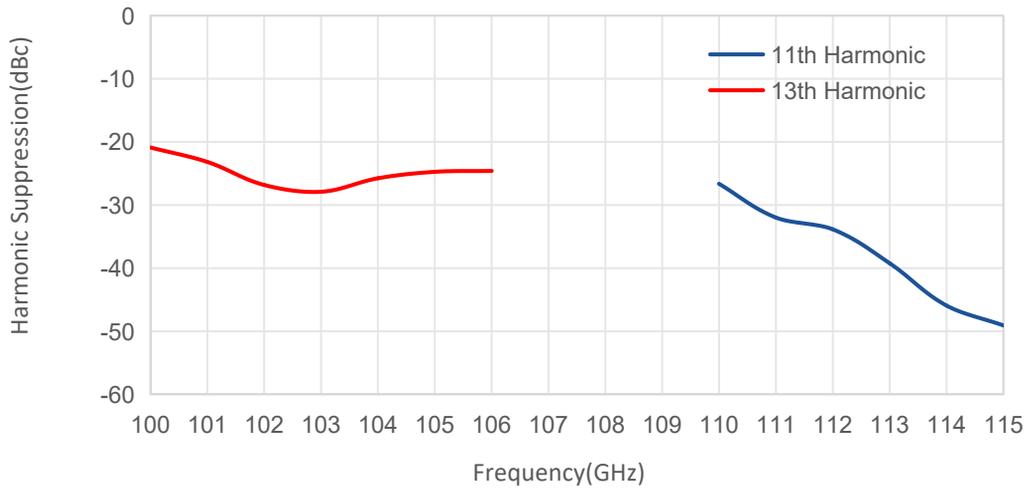

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.