

Solid State High Power Amplifier Systems

26.5-31GHz /63dB Gain/63 dBm Psat/220V AC

Model: TLP26.5G31G-63-63-P-BC

TLPA26.5G31G-63-63-P-BC is a solid state high power amplifier systems provides high output power and high gain across the 26.5 to 31 GHz frequency range. The amplifier features a built-in 220V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

Features:

- Frequency range: 26.5-31GHz
- Gain: 63dB Min
- Psat Output Power:63dBm Min
- Protection:Over TEM,over voltage, over current ,output mismatch protection
- 50 Ohm Matched Input / Output

电气特性 Electrical Characteristics:

参数 Parameter	代码 Symbol	Min	Typ	Max	单位 Units
频率范围 Frequency range	BW	26.5-31			GHz
工作模式 Working Mode	MOD	PULSE ONLY			
功率增益 Power Gain@Pout=63dBm	GP	63			dB
增益平坦度 Gain flatness	ΔGL		±3		dB
饱和输出功率 Output Psat	Psat	63			dBm
杂散 Spurious@Pout=63dBm	Spur			-60	dBc
谐波 Harmonics@Pout=63dBm	HAM			-30	dBc
输入信号体制 Input Signal Mode	IPS_MOD	CW/PULSE			
调制信号电平 Modulation Signal Level	TTL	0		5	V
调制频率 Modulation Frequency	MF	0.5		100	KHz
脉冲宽度 Pulse Width	T	0.3		500	us
占空比 Duty Cycle	τ			10	%
上升/下降沿 Rise/Fall Time	Tr		50	100	ns
脉内平坦度 Pulse Internal Flatness	Pdp			±0.5	dB
脉间平坦度 Pulse-to-Pulse Flatness	P-P			±0.1	dB
启动冲击电流 Inrush Impulse Current@10%	IPC			20	A
功耗 Power consumption@5%	Pdiss			1700	W
功耗 Power consumption@10%	Pdiss			3300	W

电气特性 Electrical Characteristics:

参数 Parameter	代码 Symbol	Min	Typ	Max	单位 Units
交流电压 AC Voltage	Vac		220		V AC
阻抗 Impedance	I/O-IMP		50		Ohms

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入接口 Input Connector	2.92mm Female	
输出接口 Output Connector	WR28	
正向/反向耦合 Forward/Reverse Coupling	2.92mm Female/2.92mm Female	
液晶显示屏 Front Panel LCD Screen Display	7 inch LCD Screen Display	
调制接口 Modulation Interface	BNC Female	
尺寸 Size	20U	
重量 Weight	≤250	Kg

绝对最大值 Absolute Maximum Ratings:


参数 Parameter	指标 Value
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

主要功能 Key Features:

参数 Parameter	特点 Advantages
控制功能 Control functions	1, Power setting On/Off 2, Gain control
内置保护功能 Protection functions	1, Over TEM 2, Over voltage 3, Over current 4, Output mismatch
监控和控制 Remote control	RS422/LAN
监测功能 Monitor functions	1, Output power 2, Reflected power 3, TEM 4, Operating voltage 5, Operating current
冷却系统 Cooling system	Built in Cooling system, forced air cooling

外形图 Outline Drawing:

Unit:mm

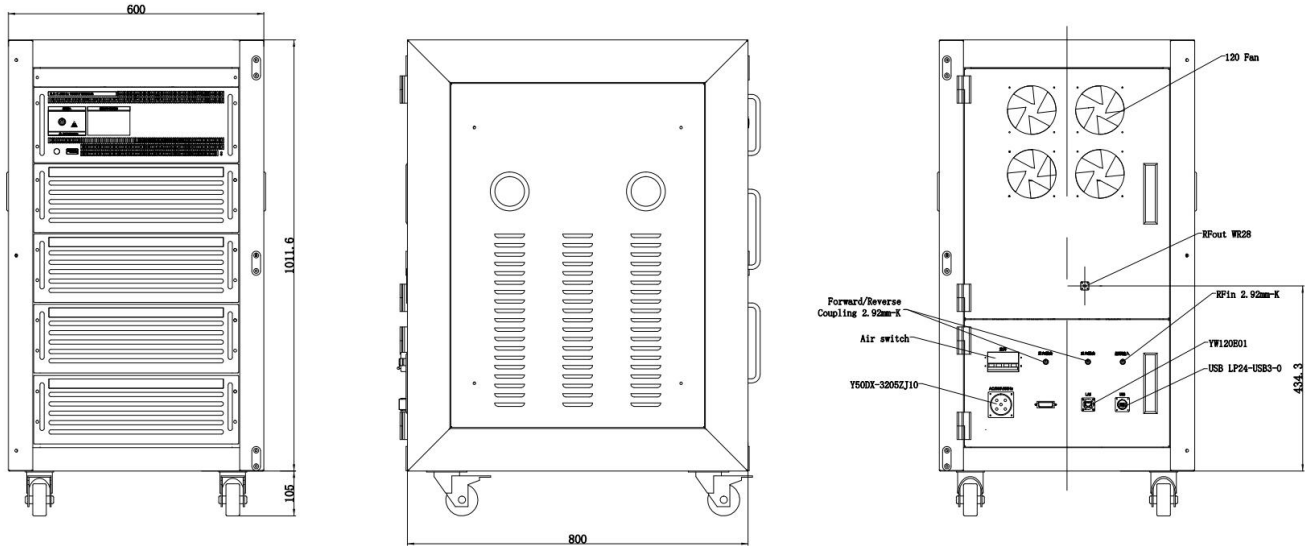

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-20		+40	°C
存储温度 Non-operating Temperature*	-30		+50	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLPA26.5G31G-63-63-P-BC	Solid State High Power Amplifier Systems 26.5-31Hz, Gain:63dB, Psat:63 dBm, 220V AC, Built in Fan Cooling	Rev.1.1