

Power Amplifier

20MHz-6GHz/35dB Gain/38dBm Psat

Model: TLPA20M6G-35-38

TLPA20M6G-35-38 is a power amplifier with a typical power gain of 35 dB and a nominal Psat of 38 dBm across the frequency range of 20MHz to 6 GHz. The DC power requirement for the amplifier is +28 VDC/0.5 A. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 20MHz-6GHz
- Gain: 35dB Typ
- Output Power Psat: 38dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	20MHz		6GHz	
Power Gain	33	35		dB
Gain Flatness		±3	±5	dB
Output P1dB	35	37		dBm
Output Psat	37	38		dBm
Harmonics@Pout=37dBm			-10	dBc
Input VSWR		1.5	2.0	:1
DC Voltage	+26	+28	+30	V DC
DC Supply Current		0.5	1.7	A
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	100*86*40(With heatsink)	mm
Weight	250	g


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+30 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing:

Unit:mm

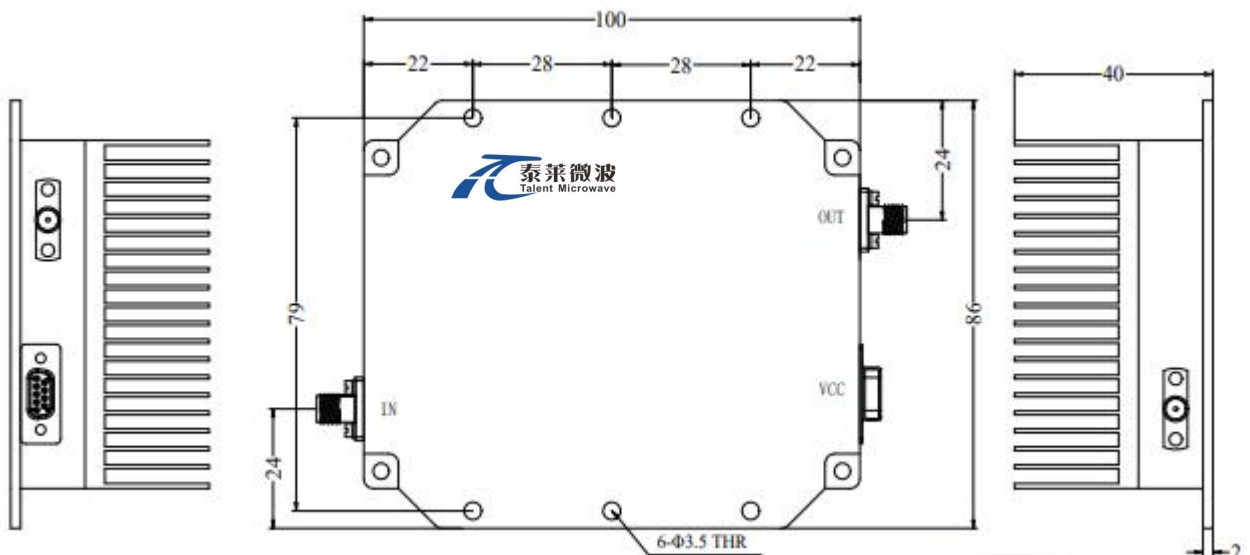

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

DC Supply Connector J30J-9ZKW-J(J30J-9TJL):

Pin	Name	Function
1	Power amplifier enable	A high (or suspended) level turns on the power amplifier, and a low level turns it off
2	GND	Power supply negative
3	GND	Power supply negative
4	GND	Power supply negative
5	GND	Power supply negative
6	+28V	Power supply positive +26.0-30.0VDC
7	+28V	Power supply positive +26.0-30.0VDC
8	+28V	Power supply positive +26.0-30.0VDC
9	+28V	Power supply positive +26.0-30.0VDC

Note: TTL is 5V.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+60	°C
Non-operating Temperature*	-50		+70	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:


Base Number	Description	Revision
TLPA20M6G-35-38	Power amplifier 20MHz-6GHz, Gain:35dB,Psat:38dBm,+28V DC,Without Heatsink	Rev.1.1
TLPA20M6G-35-38-HS	Power amplifier 20MHz-6GHz, Gain:35dB,Psat:38dBm,+28V DC,With Heatsink	Rev.1.1

Typical Performance Data:


Input VSWR vs Frequency

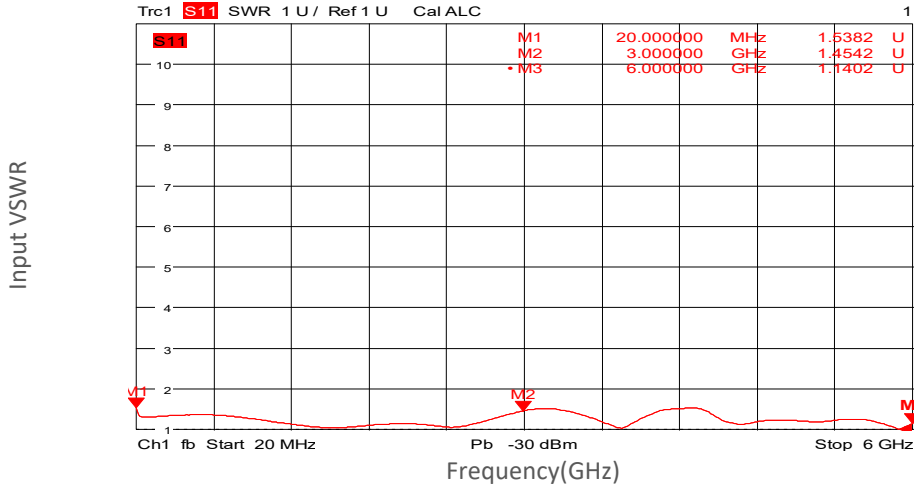

Small Signal Gain vs Frequency

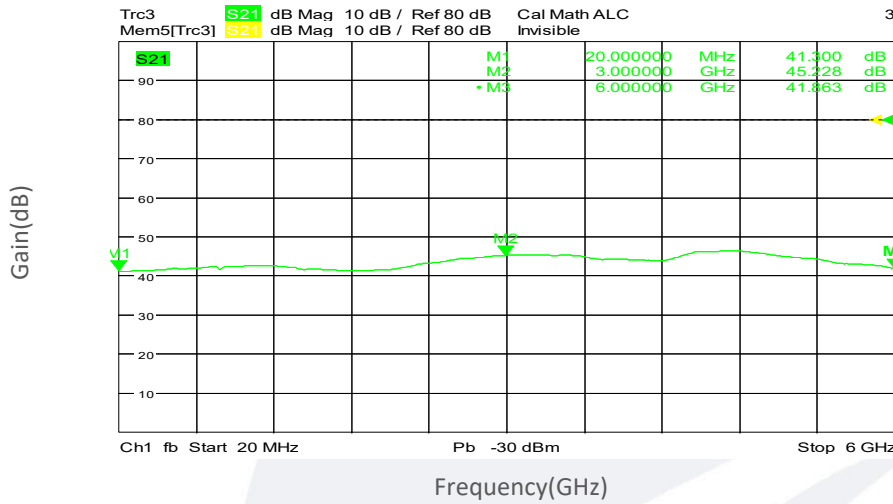


P1dB vs Frequency

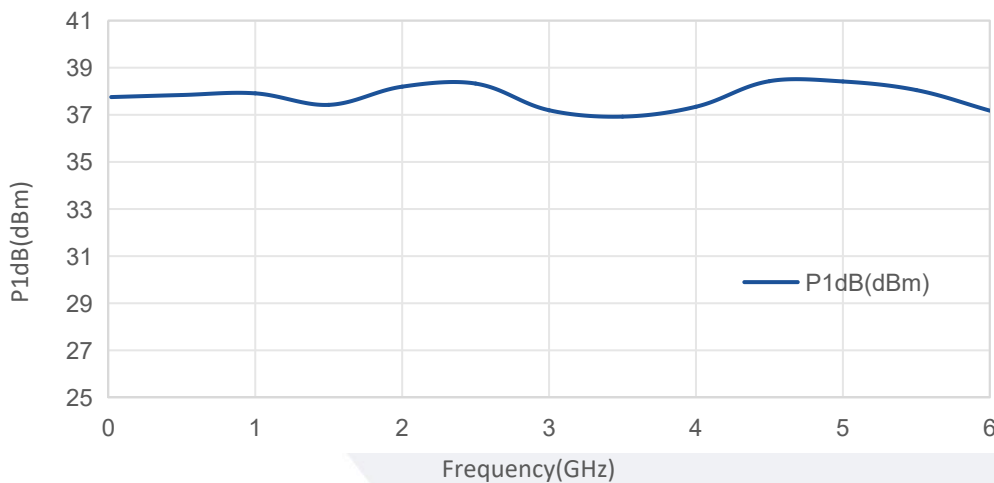


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Harmonics vs Output Power

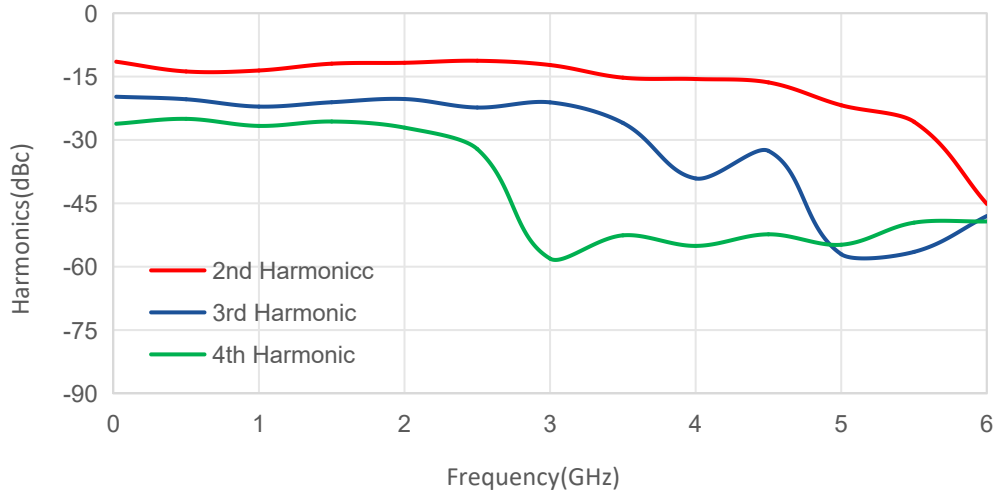

Psat vs Frequency

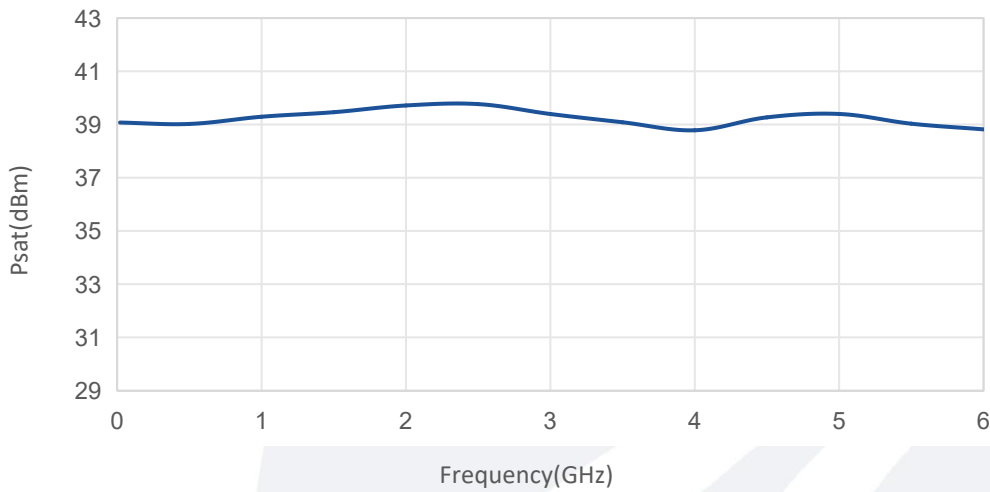

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.