

## Solid State High Power Amplifier Systems

4-8GHz/52dB Gain/52dBm Psat/220V AC

Model: TLPA4G8G-47-47-BC

TLPA4G8G-47-47-BC is a solid state high power amplifier systems provides high output power and high gain across the 4 to 8 GHz frequency range. The amplifier features a built-in 220V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

### Features:

- Frequency range: 4-8GHz
- Gain: 47dB Min
- Psat Output Power: 47dBm Min
- Protection: Over TEM, over voltage, over current, over VSWR protection
- 50 Ohm Matched Input / Output

### Electrical Characteristics:

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	BW	4		8	GHz
Power Gain	GP	47			dB
Gain flatness@Pout=47dBm	$\Delta GL$		$\pm 3$		dB
Output Psat	Psat	47			dBm
Psat flatness	$\Delta Psat$		$\pm 2$		dB
Spurious@Pout=47dBm	Spur			-50	dBc
Harmonics@Pout=47dBm	HAM		-15		dBc
Input VSWR	VSWR <sub>in</sub>			2	:1
AC Voltage	Vac	200	220	240	V AC
Power Consumption	Pdiss			700	W
Impedance	I/O-IMP		50		Ohms

## Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	N Female/N Female	
Communication Connector	DB9/RJ45	
Front Panel LCD Screen Display	5 inch LCD Screen Display	
Size	19 Inch 3U*550	mm
Weight	≤30	Kg

## Absolute Maximum Ratings:


Parameter	Value
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

## Key Features:

Parameter	Advantages
Control functions	1, Power setting On/Off 2, ALC automatic level control 3, Gain control
Protection functions	1, Over TEM 2, Over voltage 3, Over current 4, Over VSWR
Remote control	RS422/Ethernet
Cooling system	Built in Cooling system, forced air cooling

Outline Drawing:

Unit:mm

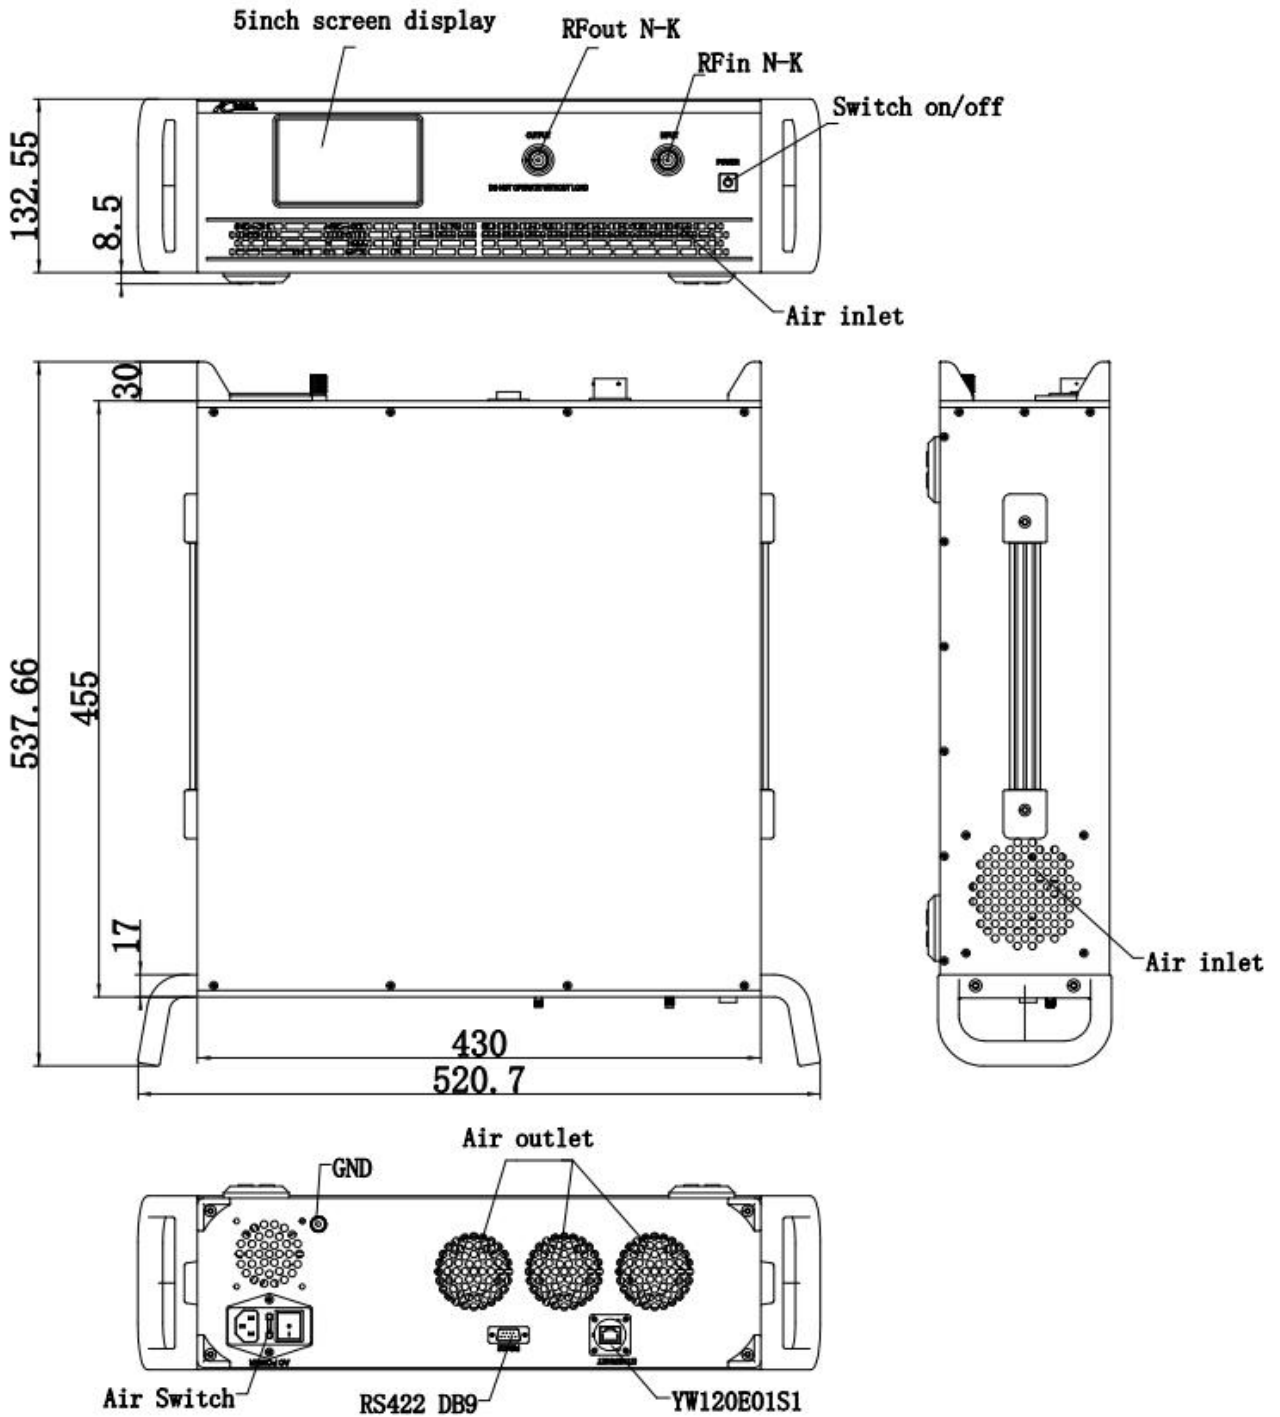

### Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+40	°C
Non-operating Temperature*	-30		+50	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

\*Note: For a wider temperature range, please consult the manufacturer.

### Ordering Information:

Base Number	Description	Revision
TLPA4G8G-47-47-BC	Solid State High Power Amplifier Systems 4-8GHz, Gain:47dB, Psat:47dBm, 220V AC, Built in Fan Cooling	Rev.1.0