

Power Amplifier

2-6GHz/53dB Gain/53dBm Psat

Model: TLPA2G6G-53-53

TLPA2G6G-53-53 is a power amplifier with a typical small signal gain of 53 dB and a nominal Psat of 53 dBm across the frequency range of 2 to 6 GHz. The DC power requirement for the amplifier is +28 VDC/20 A. The input port configuration offers coax adapter structure with SMA female and output port configuration offers coax adapter structure with N female.

Features:

- Frequency range: 2-6GHz
- Gain: 53dB Typ
- Output Power : 53dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

| 参数 Parameter | Min | Typ | Max | 单位 Units |
|-------------------------|-----|-----|-----|----------|
| 频率范围 Frequency range | 2 | | 6 | GHz |
| 小信号增益 Small Signal Gain | 50 | 53 | | dB |
| 增益平坦度 Gain Flatness | | ±3 | ±4 | dB |
| 线性输出功率 Output P1dB | 48 | 49 | | dBm |
| 饱和输出功率 Output Psat | 52 | 53 | | dBm |
| 输入驻波 Input VSWR | | 1.5 | 2.0 | :1 |
| 直流电压 DC Voltage | | +28 | +30 | V DC |
| 静态电流 Static Current | | 3 | | A |
| 饱和电流 Saturation current | | 20 | 22 | A |
| 阻抗 Impedance | | 50 | | Ohms |

机械特性 Mechanical Specifications:

| 参数 Parameter | 指标 Value | 单位 Units |
|----------------------------------|---------------------|----------|
| 输入/输出接口 Input /Output Connector | SMA Female/N Female | |
| 直流供电接口 DC Power Supply Connector | D-SUB-15Pin | |
| 尺寸 Size | 270*160*40 | mm |
| 重量 Weight | 1500 | g |


绝对最大值 Absolute Maximum Ratings:

| 参数 Parameter | 指标 Value |
|------------------------------|----------------------|
| 供电偏置电压 Supply Bias Voltage | +30 V |
| 输入功率 RF Input Power | 5dBm |
| ESD灵敏度 ESD sensitivity (HBm) | Class 0, passed 150V |



外形图 Outline Drawing:

Unit:mm

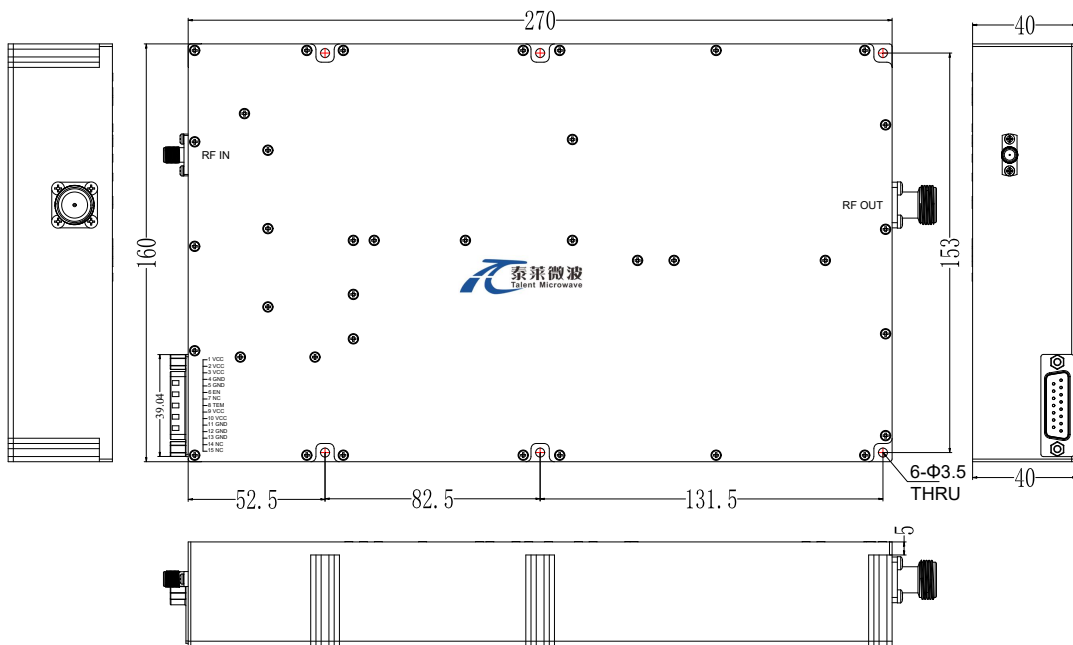




*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

外形图 Outline Drawing:

Unit:mm

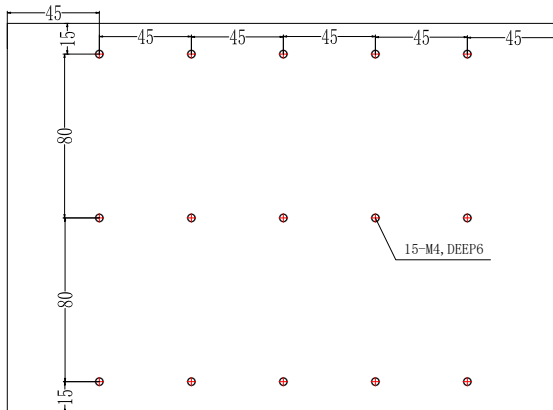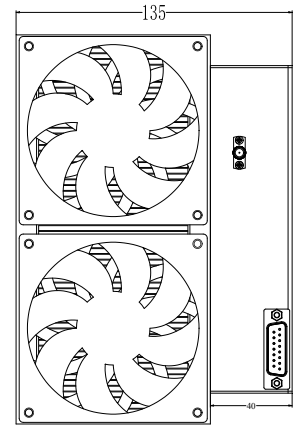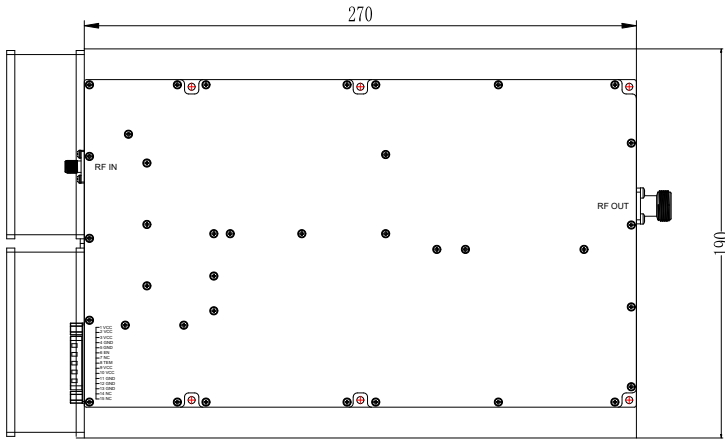

直流供电接口 DC Supply Connector (D-SUB15 Female):

| 引脚 Pin | 名称 Name | 功能 Function |
|-----------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1~3、9~10 | VCC | Power supply positive,+26.0-30.0VDC |
| 4~5、11~13 | GND | Ground |
| 6 | EN | Amplifier Enable: TTL High (5V) (Internally Pulled-High) Amplifier Disable: Short to ground |
| 8 | TEM | When the temperature of the case exceeds 75 °C, the power amplifier will turn off and this pin will be pulled high. If the temperature of case drops to 70 °C, the power amplifier will return to normal operation, and this pin will be pulled low. |
| 7、14~15 | NC | Not Connected |

温度环境 Environmental Conditions:


| 参数 Parameter | Min | Typ | Max | 单位 Units |
|------------------------------------|-----------------------------------------------------|-----|-----|----------|
| 操作温度 Operating Temperature* | -20 | | +50 | °C |
| 存储温度 Non-operating Temperature* | -30 | | +60 | °C |
| 相对湿度 Relative humidity | | 95 | | % |
| 海拔 Altitude | 10,000 | | | feet |
| 震动 Shock / Vibration(MIL-STD-810F) | 25g rms (15 degree 2KHz) endurance, 1 hour per axis | | | |
| 冲击 Shock(non operating) | 20G for 11msc half sin wave,3 axis both directions | | | |

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

| 标准型号 Base Number | 描述 Description | 版本号 Revision |
|-------------------|--------------------------------------------------------------------------|--------------|
| TLPA2G6G-53-53 | Power amplifier 2-6GHz, Gain:53dB,Psat:53dBm,+28V DC,Without Heatsink | Rev.1.0 |
| TLPA2G6G-53-53-HS | Power amplifier 2-6GHz, Gain:53dB,Psat:53dBm,+28V DC,With Heatsink | Rev.1.0 |


典型曲线 Typical Performance Data:

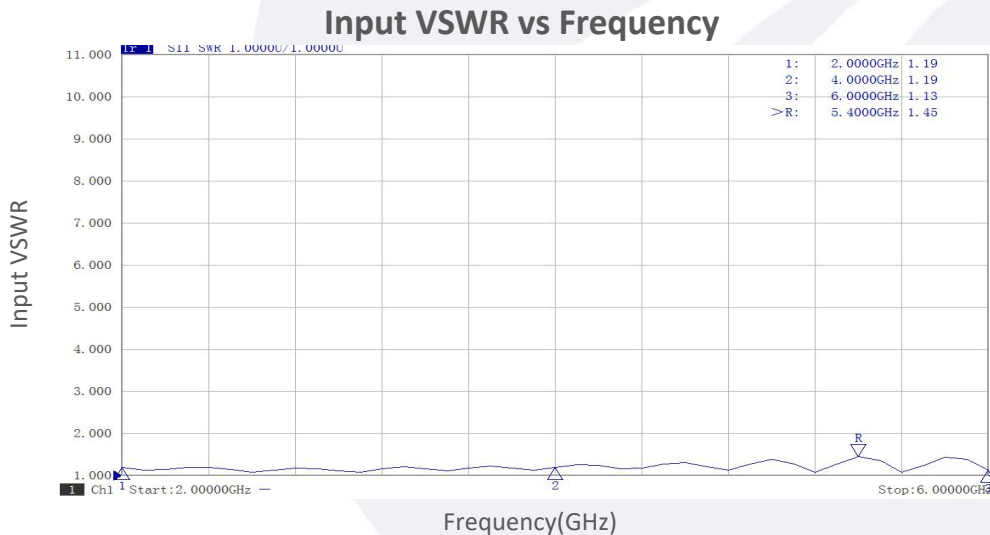


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Small Signal Gain vs Frequency

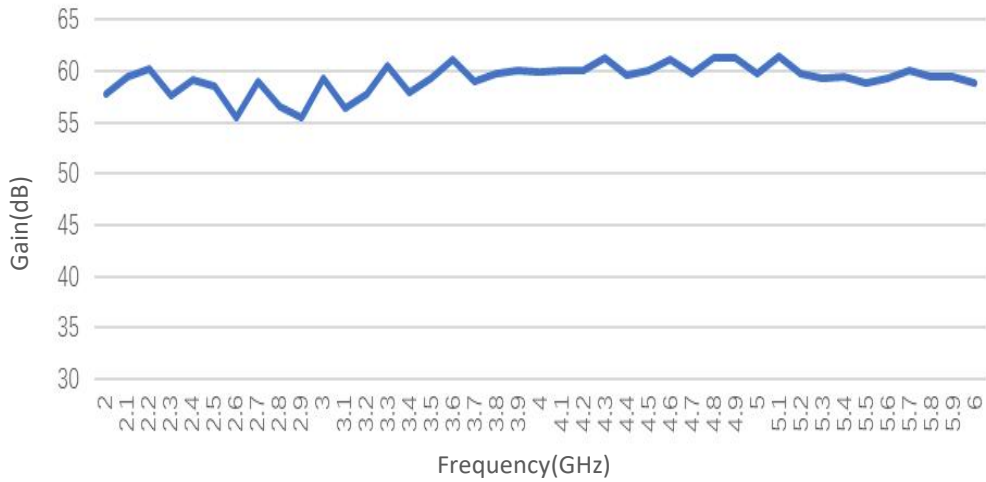

Pout@Equal-Pin



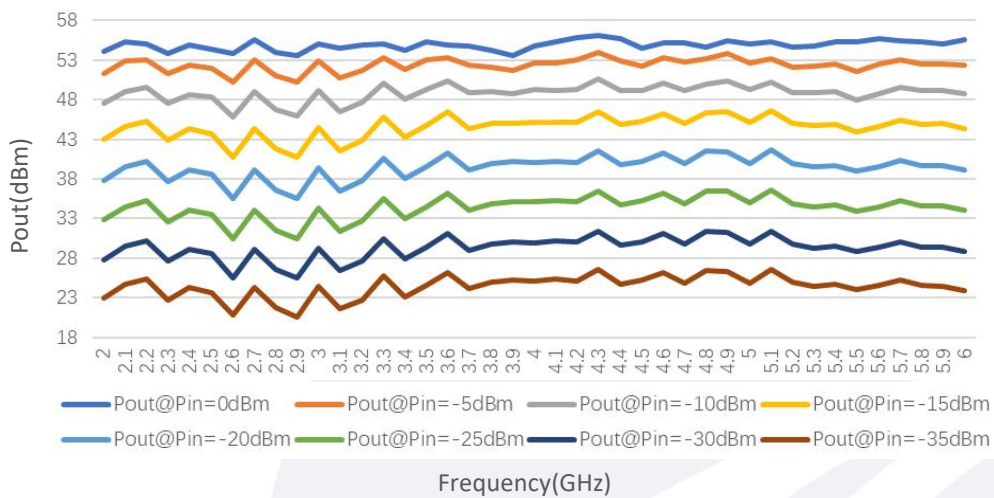


Pin@Pout

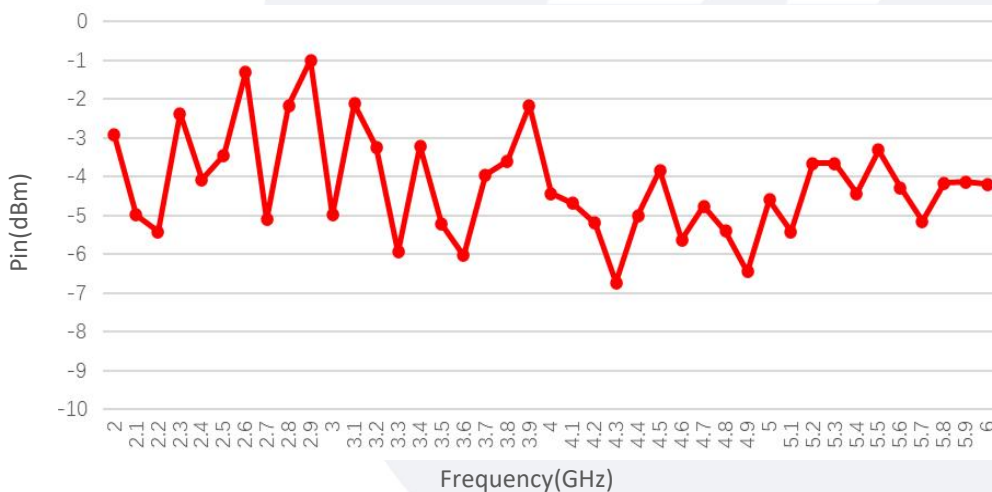

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.


典型曲线 Typical Performance Data:

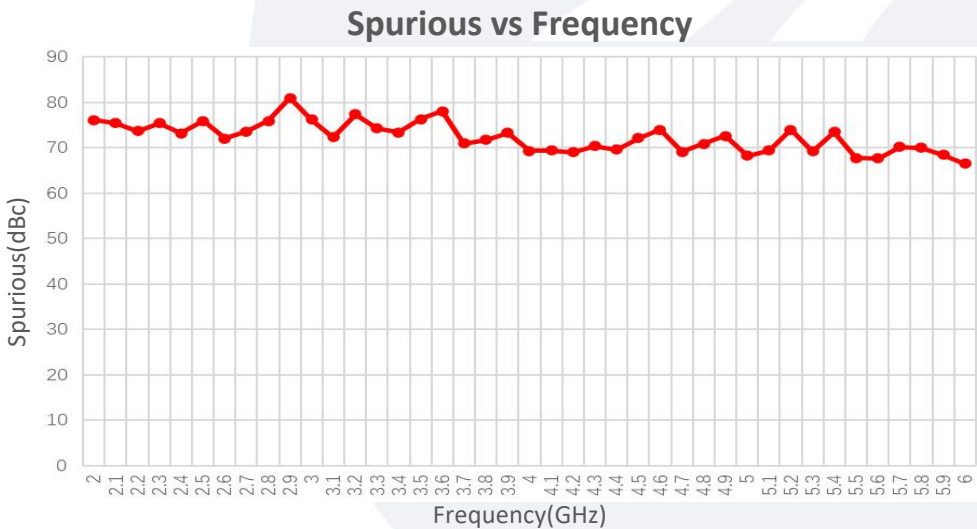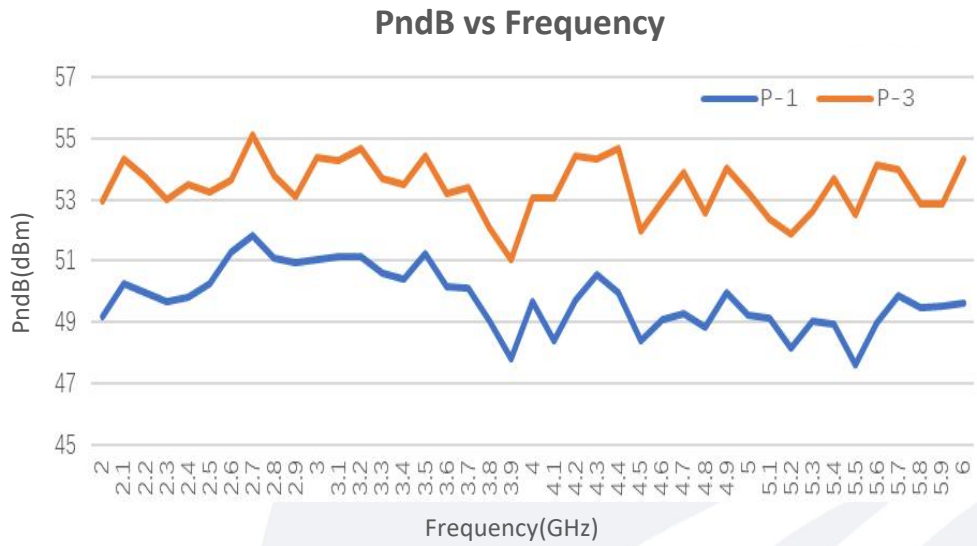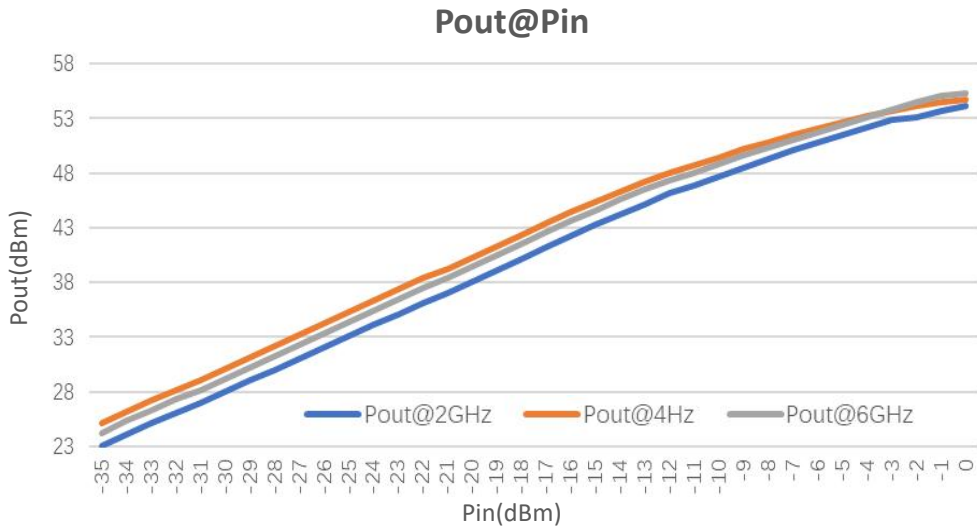


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Harmonic vs Frequency

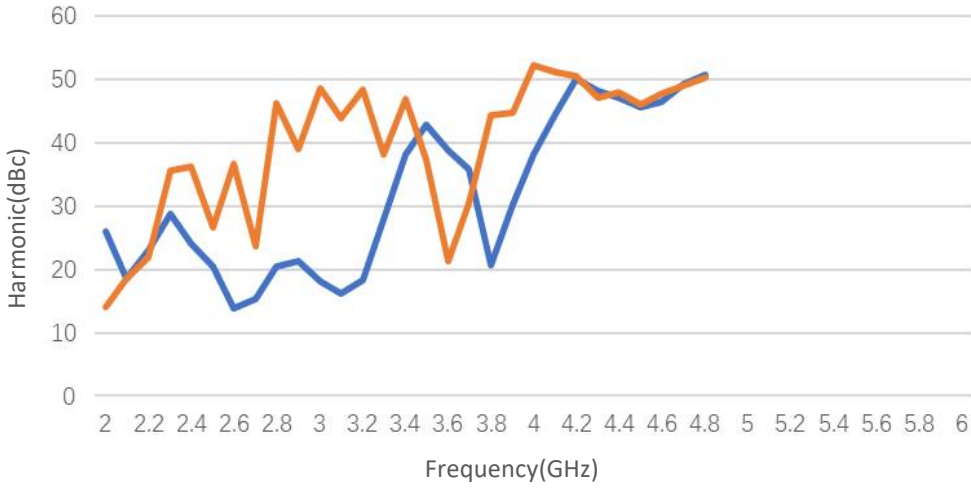

Power dissipation

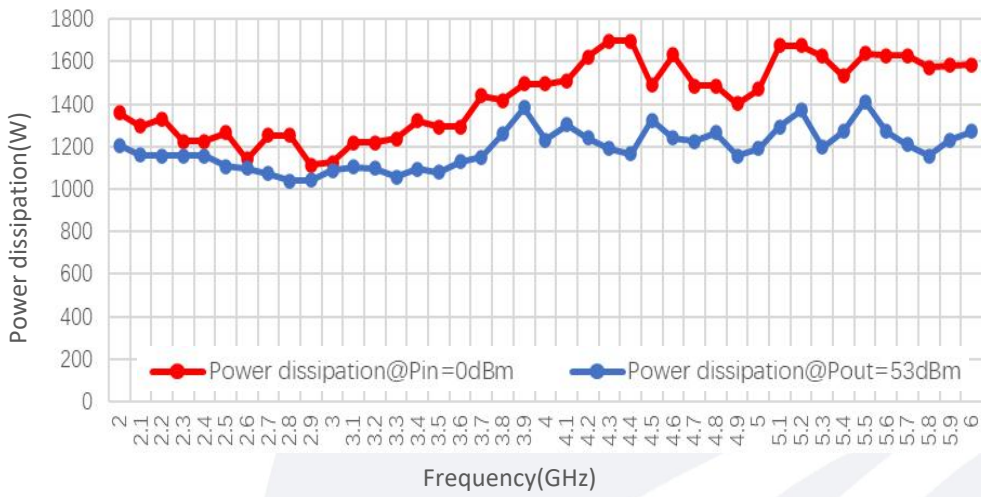

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.