

Power Amplifier

10-300MHz/33dB Gain/33dBm Psat

Model: TLPA10M300M-33-33

TLPA10M300M-33-33 is a power amplifier with a minimum small signal gain of 33 dB and a minimum Psat of 33 dBm across the frequency range of 10 to 300 MHz. The DC power requirement for the amplifier is +15 VDC/0.2 A. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 10-300MHz
- Gain: 33dB Min
- Output Power Psat: 33dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

| 参数 Parameter | Min | Typ | Max | 单位 Units |
|--------------------------|-----|-----|-----|----------|
| 频率范围 Frequency range | 10 | | 300 | MHz |
| 小信号增益 Small Signal Gain | 33 | 35 | | dB |
| 增益平坦度 Gain Flatness | | ±1 | ±2 | dB |
| 饱和输出功率 Output Psat | 33 | 34 | | dBm |
| 谐波 Harmonics @Pout=33dBm | | -15 | | dBc |
| 输入驻波 Input VSWR | | 1.5 | 2 | :1 |
| 直流电压 DC Voltage | | +15 | +16 | V DC |
| 直流电流 DC Supply Current | | 0.2 | 1.0 | A |
| 阻抗 Impedance | | 50 | | Ohms |

机械特性 Mechanical Specifications:

| 参数 Parameter | 指标 Value | 单位 Units |
|---------------------------------|---|----------|
| 输入/输出接口 Input /Output Connector | SMA Female/SMA Female | |
| 直流偏置 DC Bias | Solder Pin | |
| 尺寸 Size | 76*48*15(Without heatsink) 76*48*35(With heatsink) | mm |
| 重量 Weight | 150 | g |


绝对最大值 Absolute Maximum Ratings:

| 参数 Parameter | 指标 Value |
|------------------------------|----------------------|
| 供电偏置电压 Supply Bias Voltage | +16 V |
| 输入功率 RF Input Power | +5 dBm |
| ESD灵敏度 ESD sensitivity (HBm) | Class 0, passed 150V |



外形图 Outline Drawing:

Unit:mm

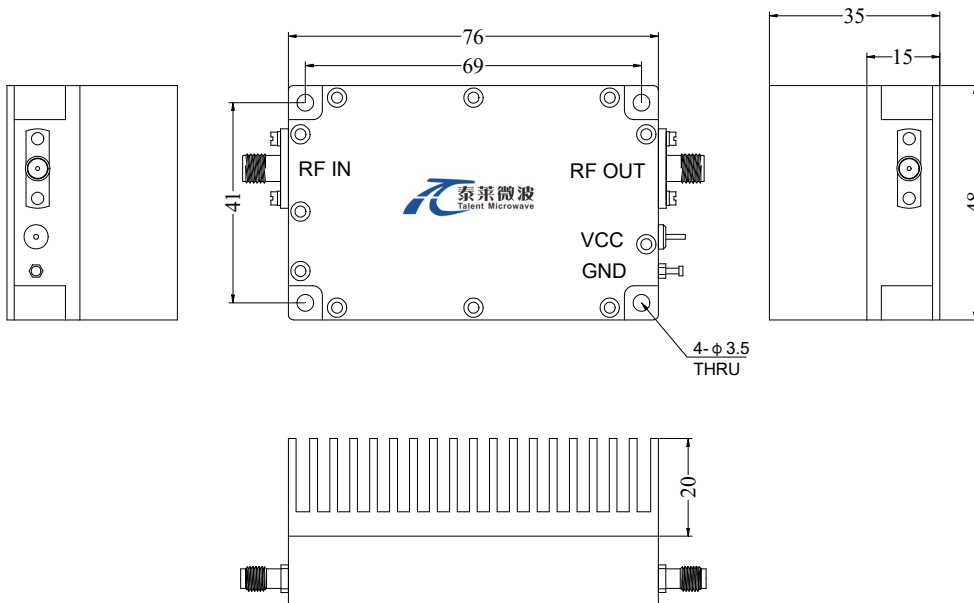

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:

| 参数 Parameter | Min | Typ | Max | 单位 Units |
|------------------------------------|---|-----|-----|----------|
| 操作温度 Operating Temperature* | -40 | | +60 | °C |
| 存储温度 Non-operating Temperature* | -50 | | +70 | °C |
| 相对湿度 Relative humidity | | 95 | | % |
| 海拔 Altitude | 10,000 | | | feet |
| 震动 Shock / Vibration(MIL-STD-810F) | 25g rms (15 degree 2KHz) endurance, 1 hour per axis | | | |
| 冲击 Shock(non operating) | 20G for 11msc half sin wave,3 axis both directions | | | |


*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

| 标准型号 Base Number | 描述 Description | 版本号 Revision |
|----------------------|---|--------------|
| TLPA10M300M-33-33 | Power amplifier 10-300MHz, Gain:33dB,Psat:33dBm,+15V DC,Without Heatsink | Rev.1.1 |
| TLPA10M300M-33-33-HS | Power amplifier 10-300MHz, Gain:33dB,Psat:33dBm,+15V DC,With Heatsink | Rev.1.1 |

典型曲线 Typical Performance Data:


Input VSWR vs Frequency

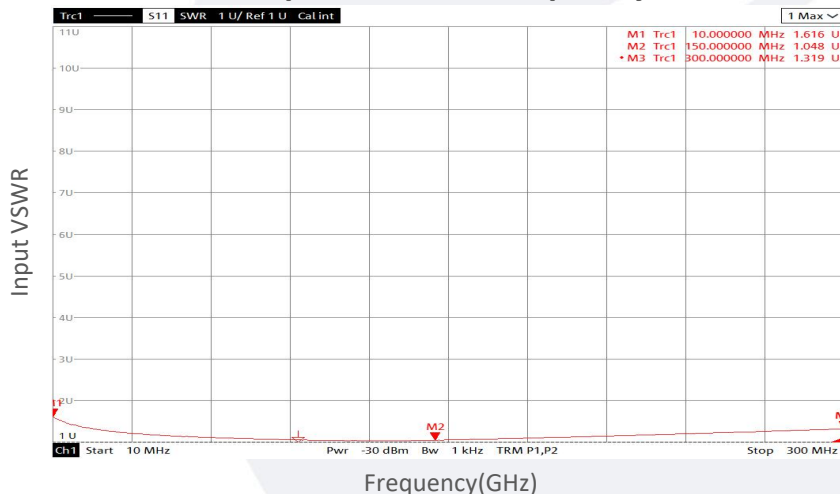


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Small Signal Gain vs Frequency

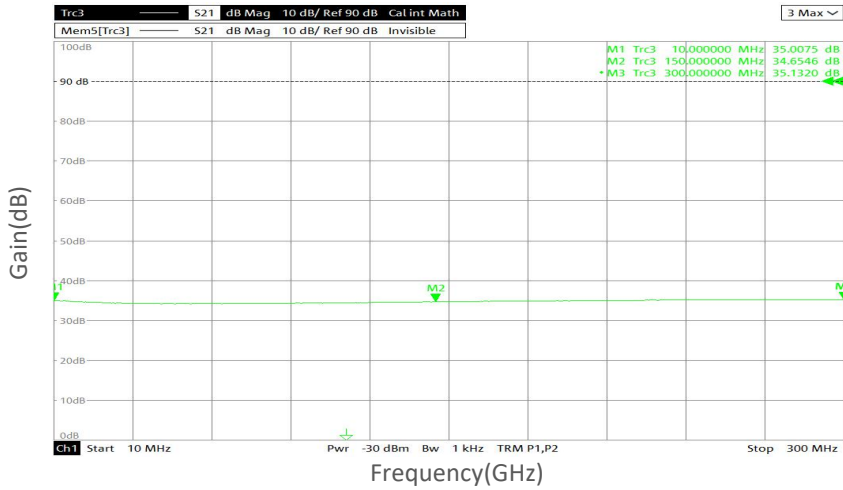

Gain vs Output Power

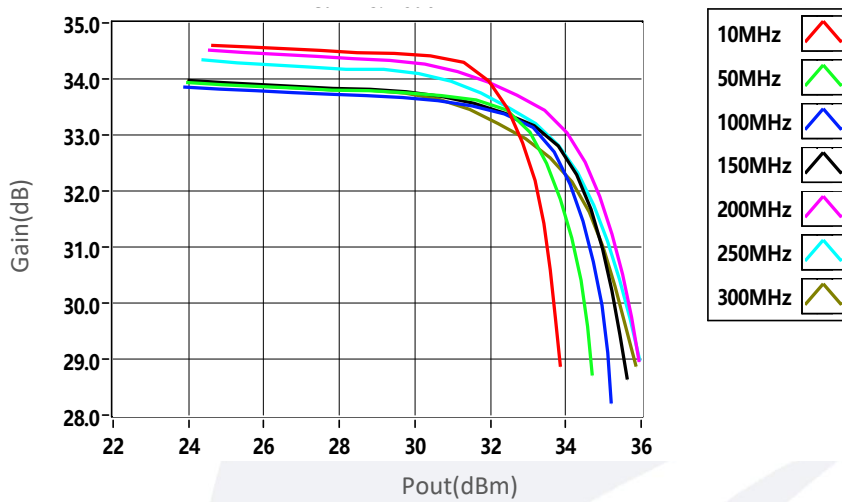


PndB vs Frequency

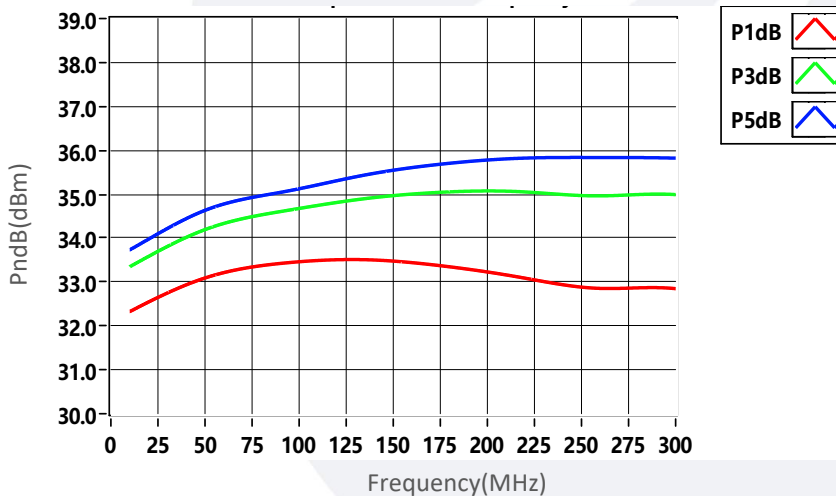


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Psat vs Frequency

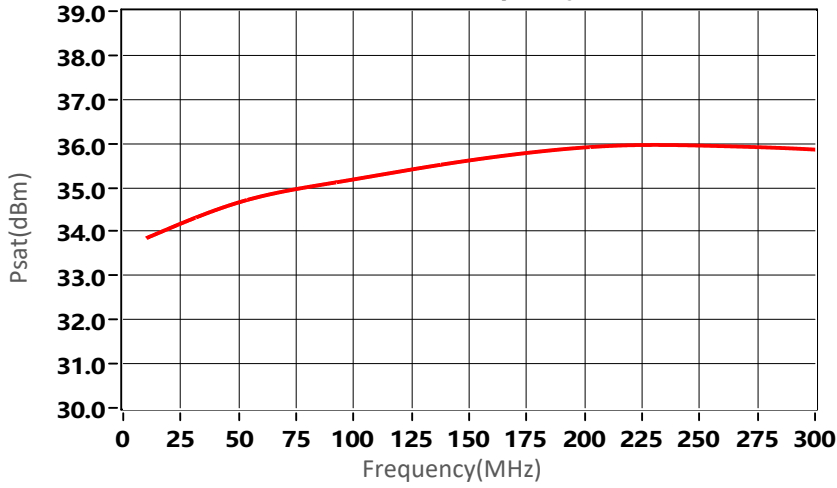

2nd Harmonics vs Output Power

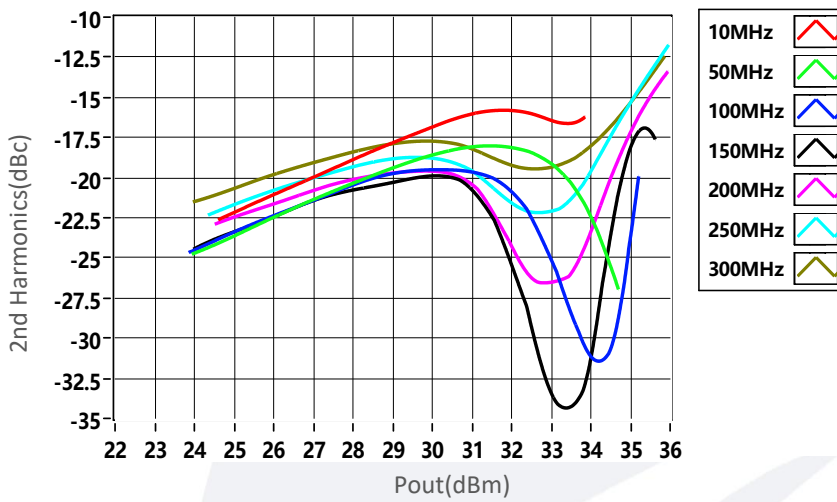


3rd Harmonics vs Output Power

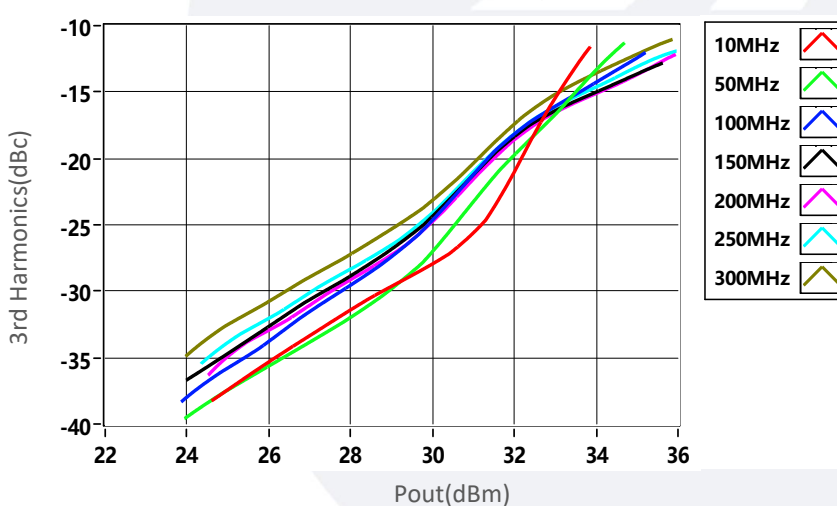

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

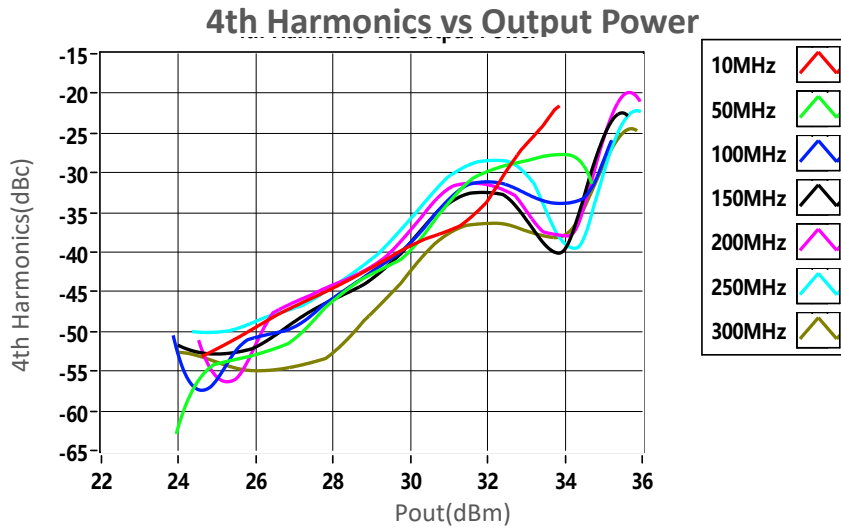

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.