

R Series Cryogenic Semi-flexible Cable Assemblies

Model: R2B-SMAMSMAM-L -NM

R2B/SMA Male /SMA male/DC-18 GHz Non-magnetic



Features:

- Max Frequency 18 GHz
- VSWR max of 1.30
- Velocity of Propagation of 70%


Applications:

- Test & Measurement equipment
- Manufacturing lab
- WAN system equipment

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency Range	DC		18	GHz
VSWR		1.25	1.3	:1
Velocity of propagation		70%		
Shielding Effectiveness	90			dB
Capacitance			81	pF/m

Cable Cross Section:

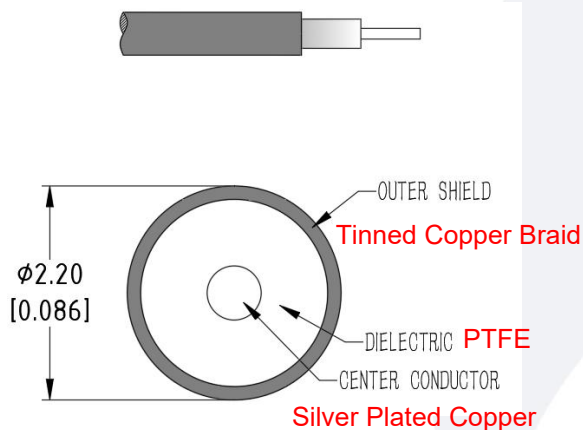

Envrionmental And Physical Characteristics:


Description	Parameter	Units
Cable Diameter	2.2	mm
Cable Jacket	Tinned Copper Braid	
Min. Bending Radius	11	mm
Typical Flex life	500	
Operating Temperature	10mk to +100	°C
Storage Temperature	-55 to +165	°C

Cable Performance By Frequency:

Frequency	2 GHz	4 GHz	6 GHz	8 GHz	12 GHz	16 GHz	18 GHz
Insertion Loss (dB/m Max)	1.00	1.46	1.84	2.16	2.74	3.24	3.48
RF Power CW (W Max.)	69	47	38	32	25	21	20

Connectors:

Description	Connector 1	Connector 2
Type	SMA Straight Male	SMA Straight Male
Contact Material And Plating	Brass,Gold	Brass,Gold
Dielectric Type	PTFE	PTFE
Body Material And Plating	Passivated Stainless Steel	Passivated Stainless Steel
Insertion Loss (dB Max)	$0.05 * \sqrt{f_GHz}$	$0.05 * \sqrt{f_GHz}$

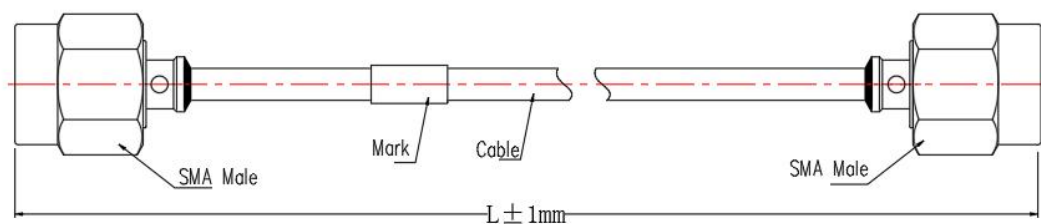

Ordering Information:

Base Number	Length (Unit meters)	Phase/delay Matched
R2B-SMAMSMAM	-L	LEAVE BLANK(NOT REQUIRED) -NM(Non-magnetic)

Typical Performance Data:

Model:R2B-SMAMSMAM-1m-NM

Frequency	2 GHz		6 GHz		12 GHz		18 GHz	
	Typ	Max	Typ	Max	Typ	Max	Typ	Max
Insertion Loss	1.07	1.14	1.96	2.08	2.91	3.08	3.69	3.91
VSWR	1.05	1.10	1.15	1.20	1.20	1.25	1.25	1.30