

Coaxial Low-pass Filter

DC-3 GHz/SMA Female/SMA Male

Model: TLLF-DC-3G-XG

TLLF-DC-3G-XG is a coaxial low-pass filter with a passband frequency from DC to 3 GHz and a rejection frequency from 3.45 GHz to 8 GHz. The maximum insertion loss of the filter is 1.0 dB and the minimum rejection is 50 dB.

Features:

- Passband Frequency Range DC to 3GHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	DC		3	GHz
Passband Insertion Loss			1.0	dB
Pass band Ripple			1.0	dB
帶外Rejection	>50dB@3.45-8GHz			
Power Handling			15	W
VSWR			1.6	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female/SMA Male	
Size	48*32*12	mm

Outline Drawing:

Unit:mm

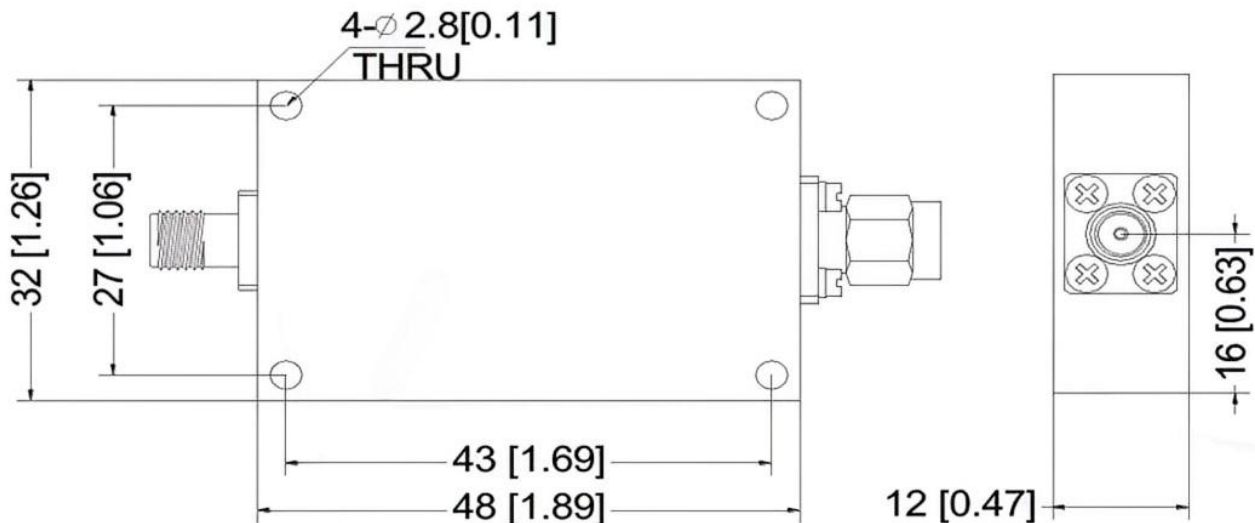


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLLF-DC-3G-XG	Coaxial Low-pass Filter, Passband frequency range: DC-3GHz, Passband Insertion Loss: 1.0dB, SMA Female/SMA Male	Rev.1.0

Typical Performance Data:

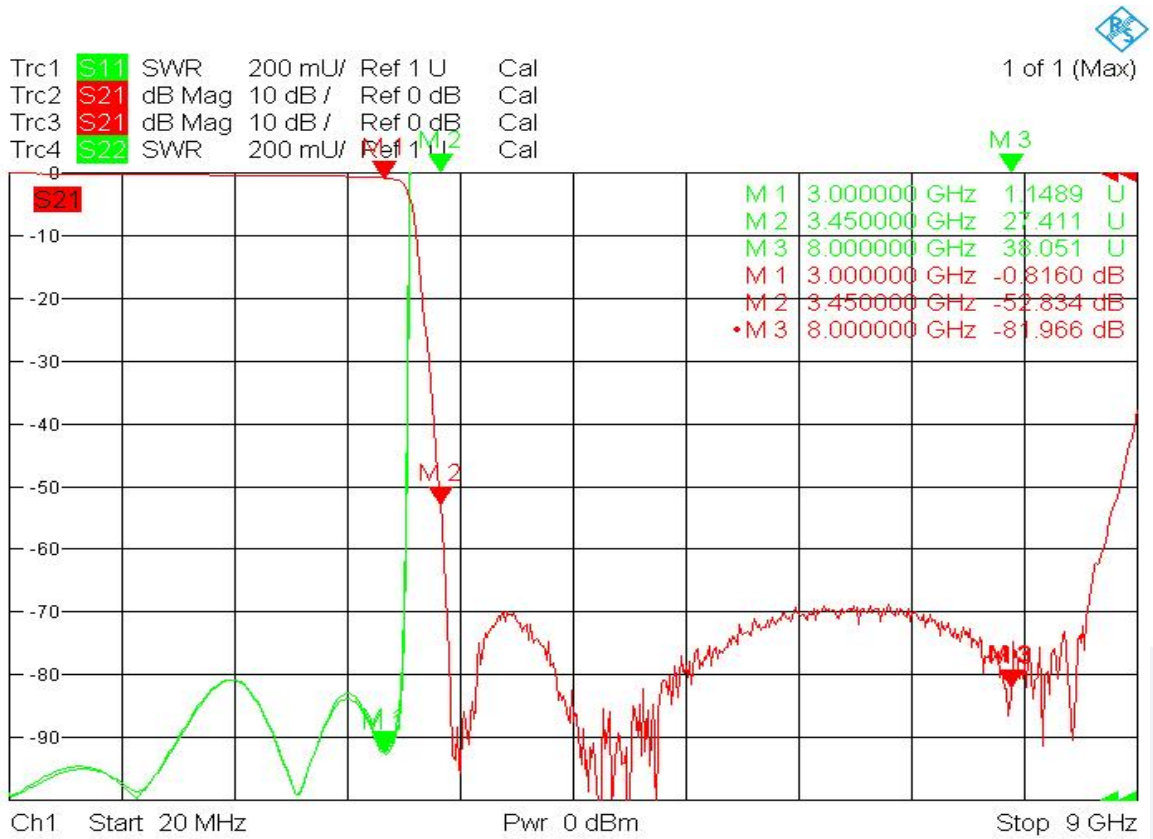

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.