

Coaxial Low-pass Filter

DC-25GHz/SMA Female

Model: TLLF-DC-25G-X

TLLF-DC-25G-X is a coaxial low-pass filter with a passband frequency from 0 to 25GHz and a rejection frequency from 29 to 31 GHz. The nominal insertion loss of the filter is 2.0 dB and the typical rejection is 40 dB.

Features:

- Passband Frequency Range DC to 25GHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
Passband Frequency range	DC		25	GHz
Passband Insertion Loss			2.0	dB
Pass Band Ripple			1.8	dB
Rejection@29-31GHz	40			dB
Power Handling			15	W
Input VSWR			2.0	:1
Output VSWR			2.0	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Storage Temperature	-40 to +70	°C
Connectors	2.92 Female	

Outline Drawing:

Unit:mm

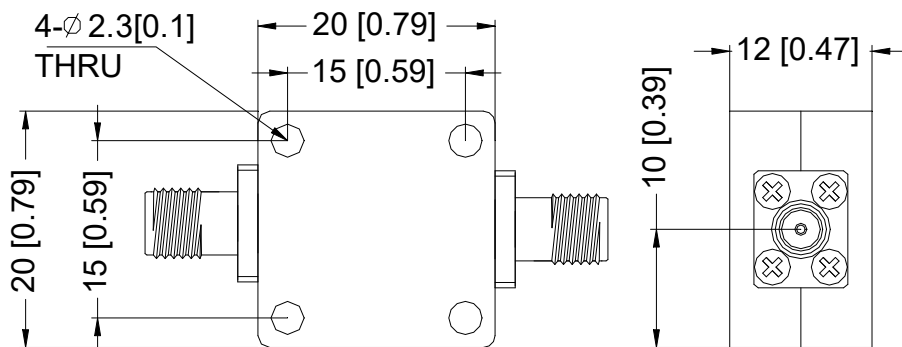


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLLF-DC-25G-X	Coaxial Low-pass Filter, Passband frequency range: DC-25GHz, Passband Insertion Loss: 2.0dB, 2.92 Female	Rev.1.0

Typical Performance Data:

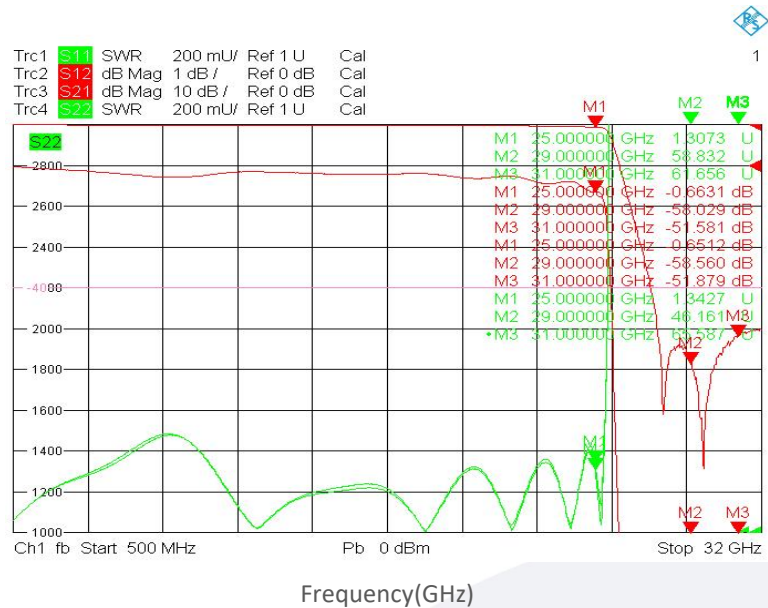

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.