

Coax Directional Coupler

2-18GHz/30dB Coupling/N Female/N Female

Model: TC-20180-30N-400W

TC-20180-30N-400W is a coax directional coupler that delivers a 30 dB nominal coupling level and 10 dB minimum directivity across the full frequency range from 2 to 18GHz.. It is a four-port passive device that can couple a portion of the power from the main transmission line to the auxiliary line in a directional manner.

Features:

- Output Frequency: 2-18GHz
- Max Power: 400W
- Stackable mechanical design
- Low Insertion Loss
- Moderate Directivity
- 50 Ohm Matched Input / Output

Applications:

- Test Labs
- Instrumentations
- Sub-assemblies


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
工作频率 Frequency Range	2		18	GHz
插入损耗 Insertion Loss			0.8	dB
耦合度 Coupling		30±1.2		dB
耦合度平坦度 Coupling Flatness		±1.6		dB
方向性 Directivity	10			dB
主线驻波 Main Line VSWR			1.5	:1
耦合口驻波 Coupling Port VSWR			1.6	:1
耐功率 Power Handling		400		W
阻抗 Impedance		50		Ohms

环境和机械特性 Envrionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
接口 Coupled Port	N Female/N Female	
尺寸 Size	107.6*40.9*30	mm

外形图 Outline Drawing: Unit:mm

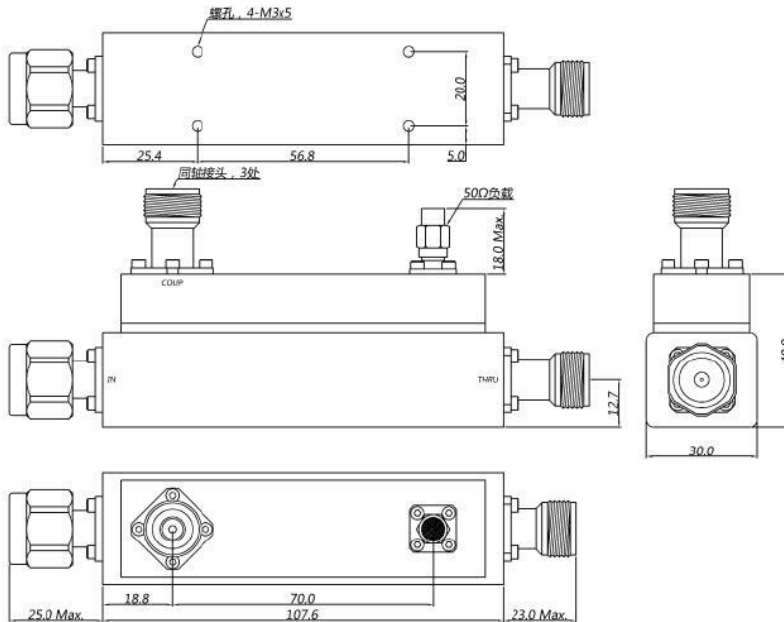

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TC-20180-30N-400W	Coax Directional Coupler 2-18GHz, Coupling:30dB, N Female/N Female	Rev.1.0

典型曲线 Typical Performance Data:

