

Coaxial Band-pass Filter

2.3975-2.4025GHz/ SMA Female

Model: TLBF-2G4-5M-E2

TLBF-2G4-5M-E2 is a coaxial band-pass filter with a passband frequency from 2.3975 to 2.4025GHz and a rejection frequencies at 2GHz and at 2.6GHz. The nominal insertion loss of the filter is 1.9dB and the typical rejection is 60dB.

Features:

- Passband Frequency Range 2.3975 to 2.4025GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	2.3975		2.4025	GHz
Passband Insertion Loss			1.9	dB
Pass Band Ripple			1.7	dB
Rejection	>60dB@2000MHz&2600MHz			dB
Power Handling			15	W
Input VSWR			1.5	:1
Output VSWR			1.5	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Storage Temperature	-40 to +70	°C
Connectors	SMA Female	

Outline Drawing:

Unit:mm;

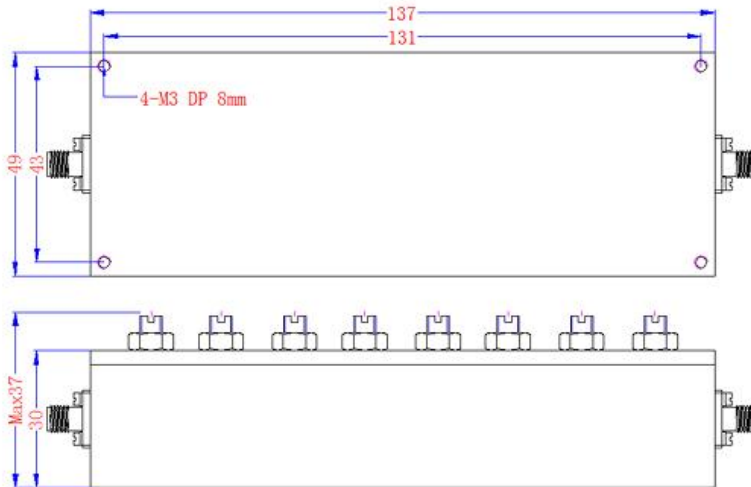


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

Base Number	Description	Revision
TLBF-2G4-5M-E2	Coaxial Band-pass Filter, Passband frequency range: 2.3975 to 2.4025GHz, Passband Insertion Loss: 1.9dB, SMA Female	Rev.1.0

Typical Performance Data:

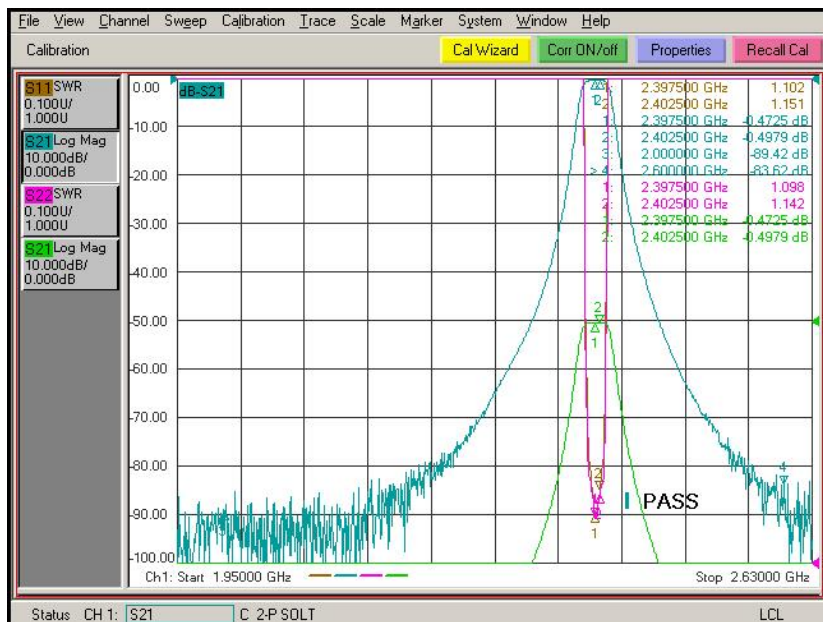

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.