

RC Low Pass Filters

24 Channel/J30J-25Pin

Model:TL-CRYORCLF25-DC-FD

Features:

- OFHC body
- PI structure

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency Range	DC		1	KHz
带内插损 Passband Insertion Loss		3		dB
带外抑制 Stopband Suppression@100KHz		45		dB

环境和机械特性 Envirionmental And Physical Characteristics:


类型 Description	参数 Parameter	单位 Units
输入/输出接口 Input/Output Connector	J30J-25TJSL/J30J-25ZKSP	
壳体材质 Case Material	OFHC Copper	
表面处理 Finish	Gold plated	
尺寸 Size	58*38*10	mm
重量 Weight	250	g

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TL-CRYORCLF25-DC-FD	DC-30KHz, RC Low Pass Filters	Rev.1.1


外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

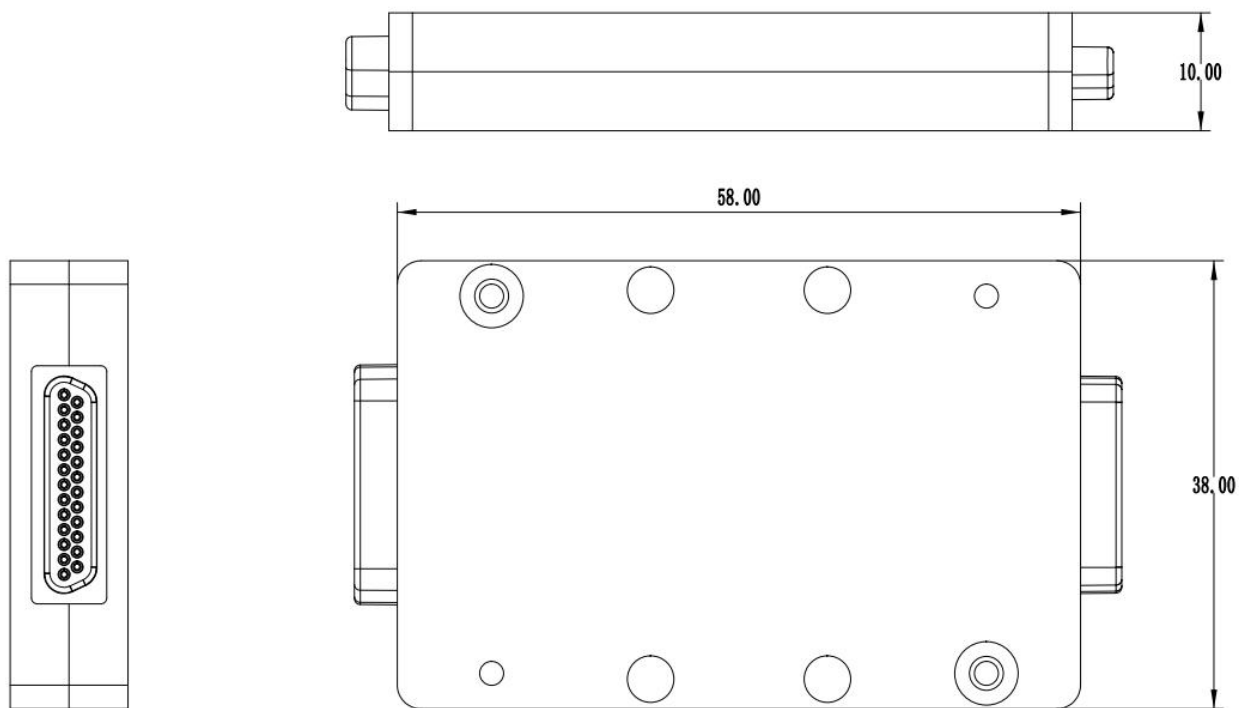


典型曲线 Typical Performance Data:

Insertion Loss vs Frequency

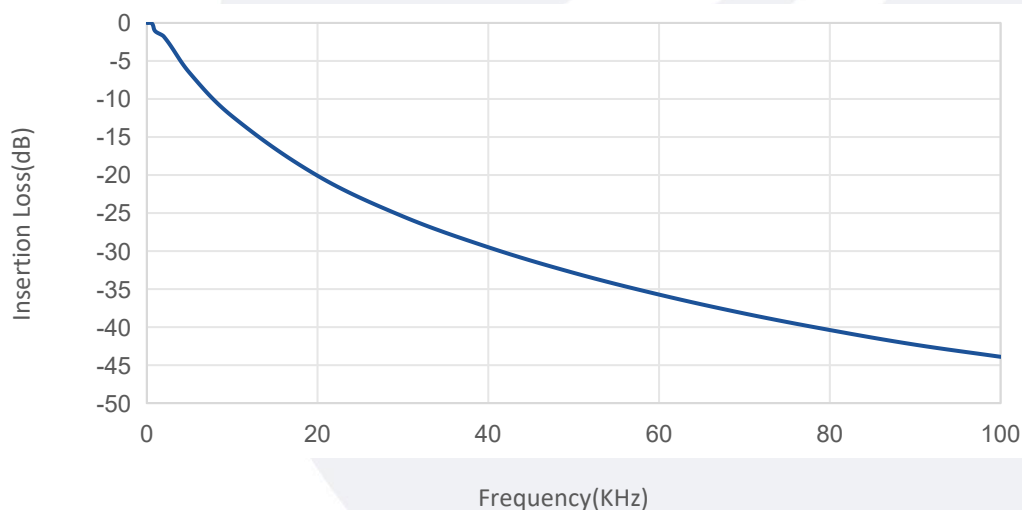

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

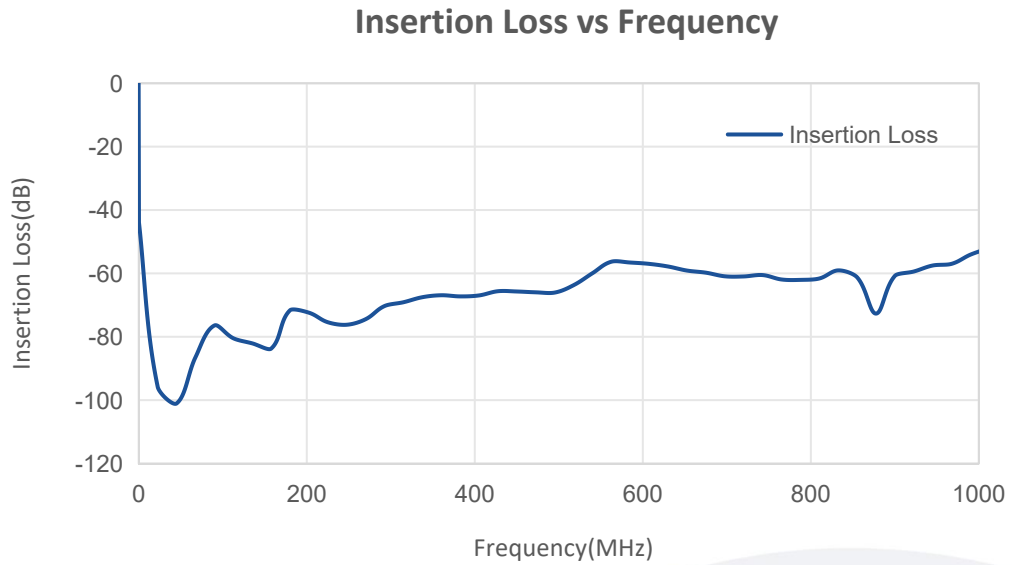

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.