


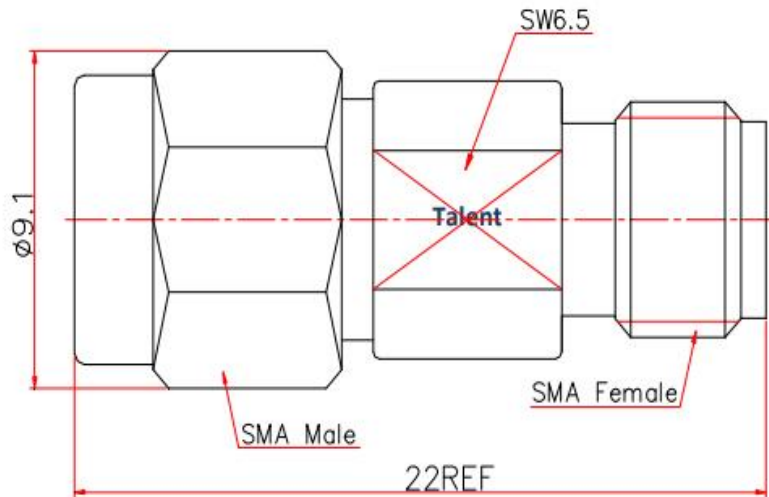

Electrical & Environmental Characteristics

Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~26.5GHz
Dielectric Withstanding Voltage	1000V
VSWR	1.15 typ
Insertion Loss	≤0.30dB
Operating Temperature	10mK~+165℃

Material & Coat-Plating

Inner Conductor	Non-magnetic beryllium copper, Gold Plated
Dielectric	PTFE
Body&Nut	Non-magnetic beryllium copper, Gold Plated

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Suzhou Talent Microwave,Inc			
		CHK				
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 3 PLC ±- 3 PLC ±- ANGLES ±1°	APVD	Product Model SMA-JK-NM SMA Male to SMA Female adaptor with non-magnetic			
		PRODUCT SPEC				
		APPLICATION SPEC				
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SIZE A4	GAGE CODE OT8L4	DRAWING NO	
		CUSTOMER DRAWING			SHEET1 OF 1	RVE 1