

Coaxial Band-pass Filter

1.25-1.75 GHz/SMA Female

Model: TLBF-1G5-500M-L2

TLBF-1G5-500M-L2 is a coaxial band-pass filter with a passband frequency from 1.25 to 1.75 GHz and a rejection frequencies at $f_c \pm 260$ MHz. The maximum insertion loss of the filter is 2.6 dB and the minimum rejection is 40 dB.

Features:

- Passband Frequency Range 1.25 to 1.75 GHz
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	1.25		1.75	GHz
Band Width			500	MHz
Passband Insertion Loss			2.6	dB
Pass Band Ripple			2.4	dB
VSWR			1.6	:1
Rejection@ $f_c \pm 260$ MHz	40			dB
Power Handling			2	W
Impedance	50			Ohms

Environmental And Physical Characteristics:

Description	Parameter	Units
Operating Temperature	-40 To +70	°C
Connectors	SMA Female	
Size	10*12*40.4	mm

Outline Drawing:

Unit:mm

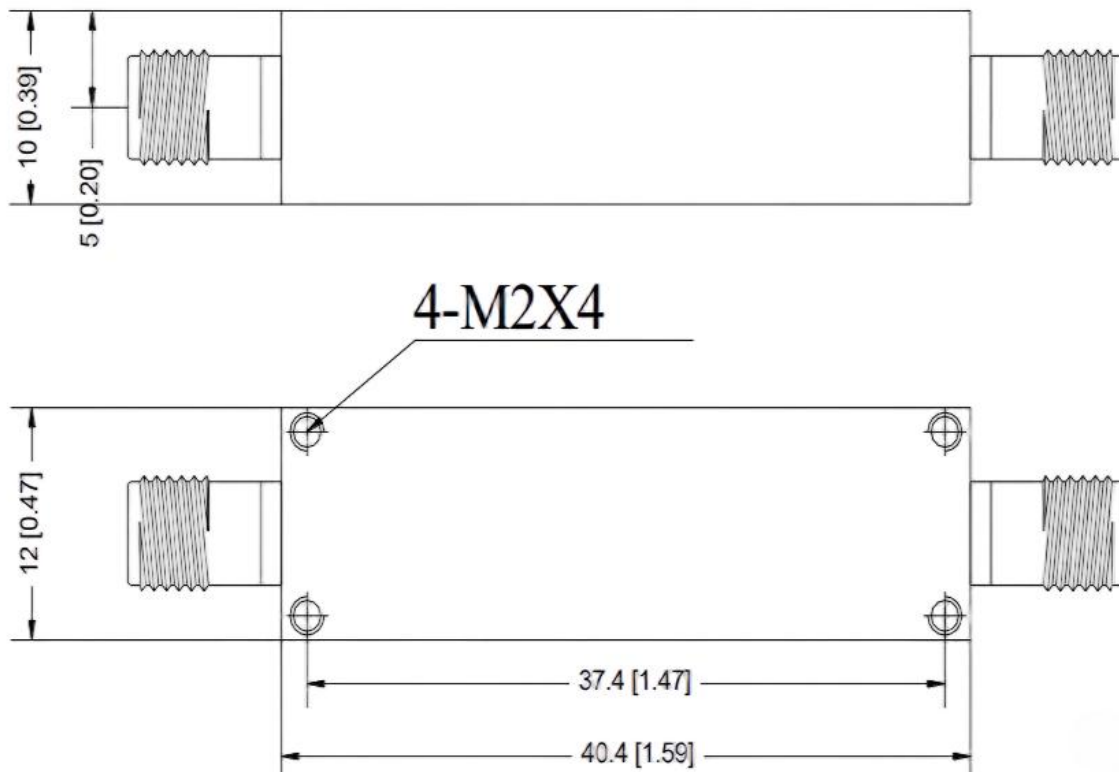


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-1G5-500M-L2	Coaxial Band-pass Filter, Passband frequency range: 1.25-1.75GHz, Passband Insertion Loss: 2.6dB, SMA Female	Rev.1.0

Typical Performance Data:

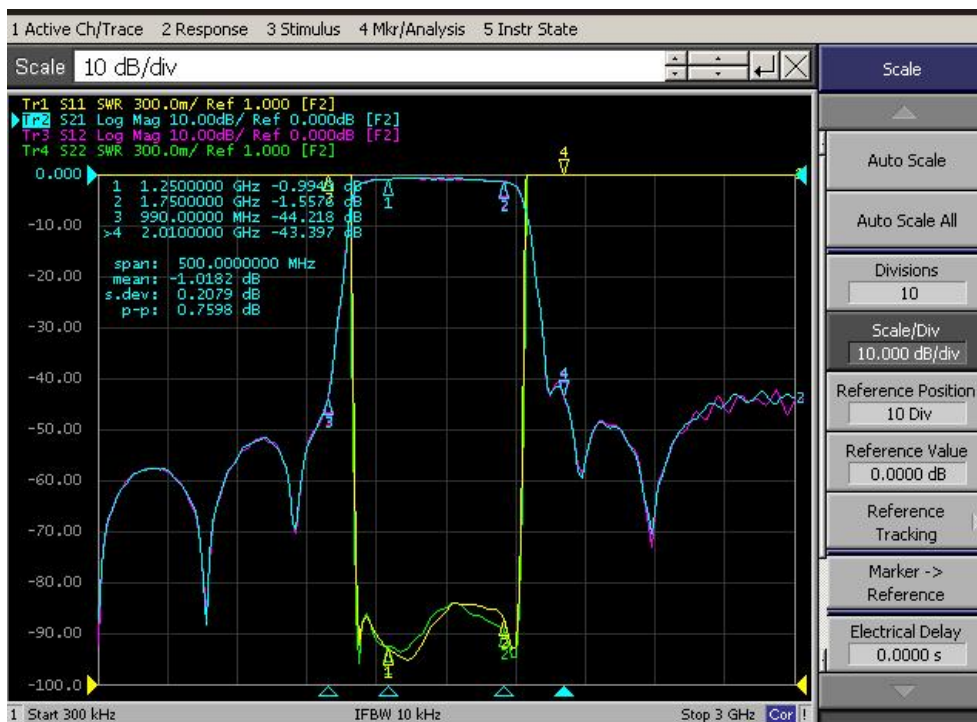

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.