

Coaxial Band-pass Filter

1.77-1.79 GHz/SMA Female

Model: TLBF-1G78-20M-E

TLBF-1G78-20M-E is a coaxial band-pass filter with a passband frequency from 1.77 to 1.79 GHz and a rejection frequencies at $f_c \pm 50$ MHz. The maximum insertion loss of the filter is 1.8 dB and the minimum rejection is 40 dB.

Features:

- Passband Frequency Range 1.77 to 1.79 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	1.77		1.79	GHz
Band Width			20	MHz
Passband Insertion Loss			1.8	dB
Pass Band Ripple			1.6	dB
VSWR			1.5	:1
Rejection@ $f_c \pm 50$ MHz	40			dB
Power Handling			50	W
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	
Size	26*51*74	mm

Outline Drawing:

Unit:mm

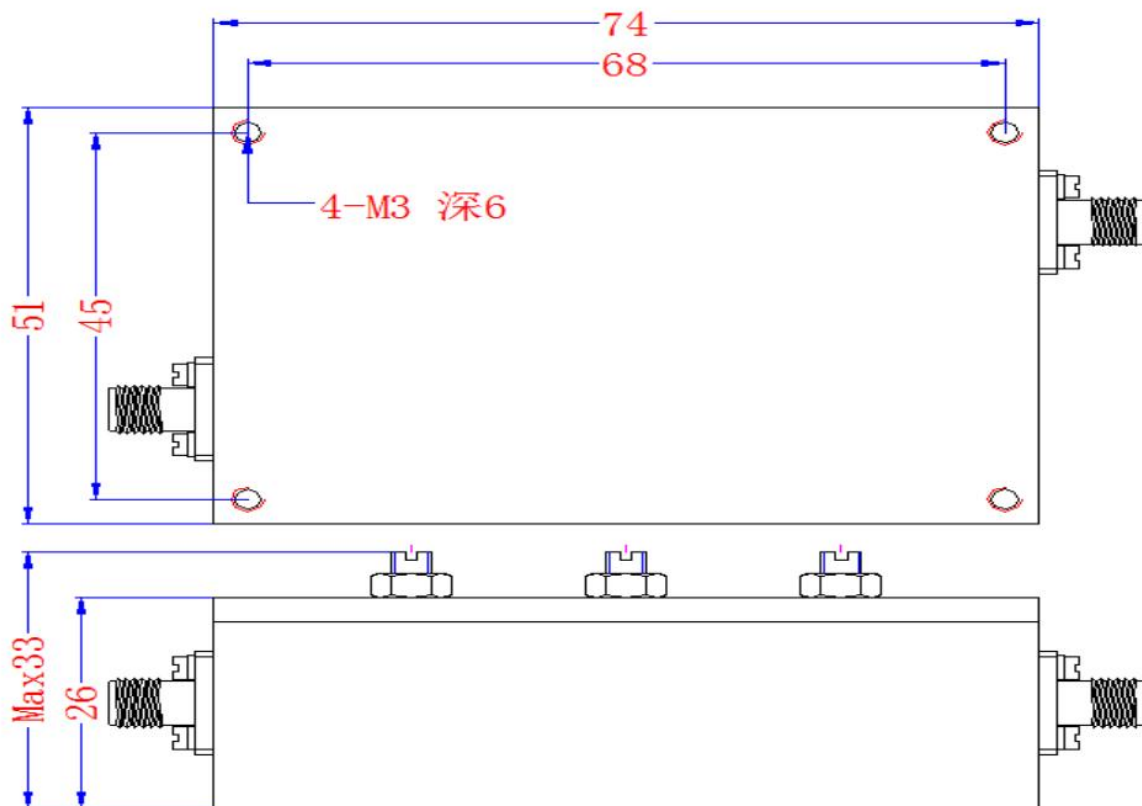

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-1G78-20M-E	Coaxial Band-pass Filter, Passband frequency range: 1.77-1.79GHz, Passband Insertion Loss: 1.8dB, SMA Female	Rev.1.0