

Coaxial Band-pass Filter

2200-2300 MHz/SMA Female

Model: TLBF-2G25-100M-E

TLBF-2G25-100M-E is a coaxial band-pass filter with a passband frequency from 2200 to 2300 MHz and a rejection frequencies at $f_0 \pm 600$ MHz. The maximum insertion loss of the filter is 0.6 dB and the minimum rejection is 50 dB.

Features:

- Passband Frequency Range 2200 to 2300 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	2200		2300	MHz
Band Width			100	MHz
Insertion Loss(f_0)			0.6	dB
Pass Band Ripple			0.5	dB
VSWR			1.6	:1
Rejection@ $f_0 \pm 600$ MHz	50			dB
Power Handling			10	W
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	
Size	25*40*40	mm

Outline Drawing:

Unit:mm

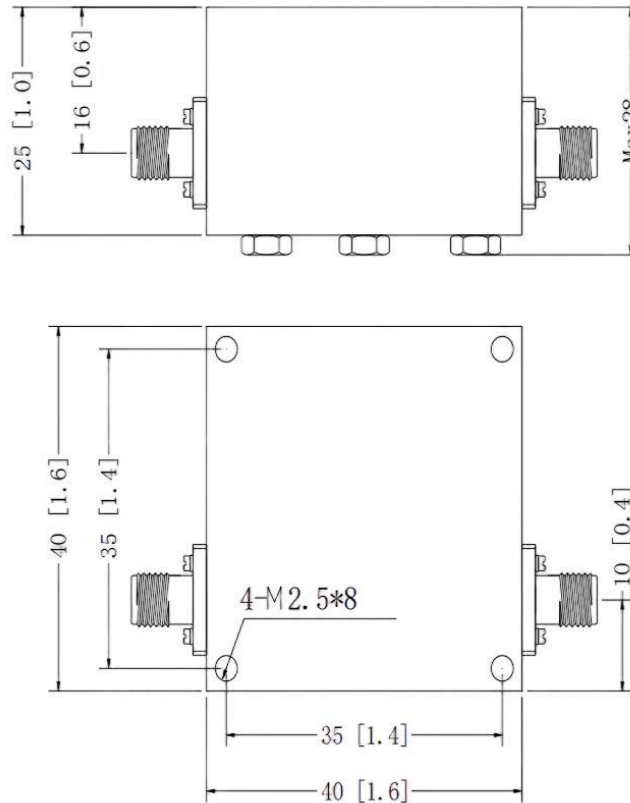


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-2G25-100M-E	Coaxial Band-pass Filter, Passband frequency range: 2200-2300MHz, Insertion Loss(f0): 0.6dB, SMA Female	Rev.1.0

Typical Performance Data:

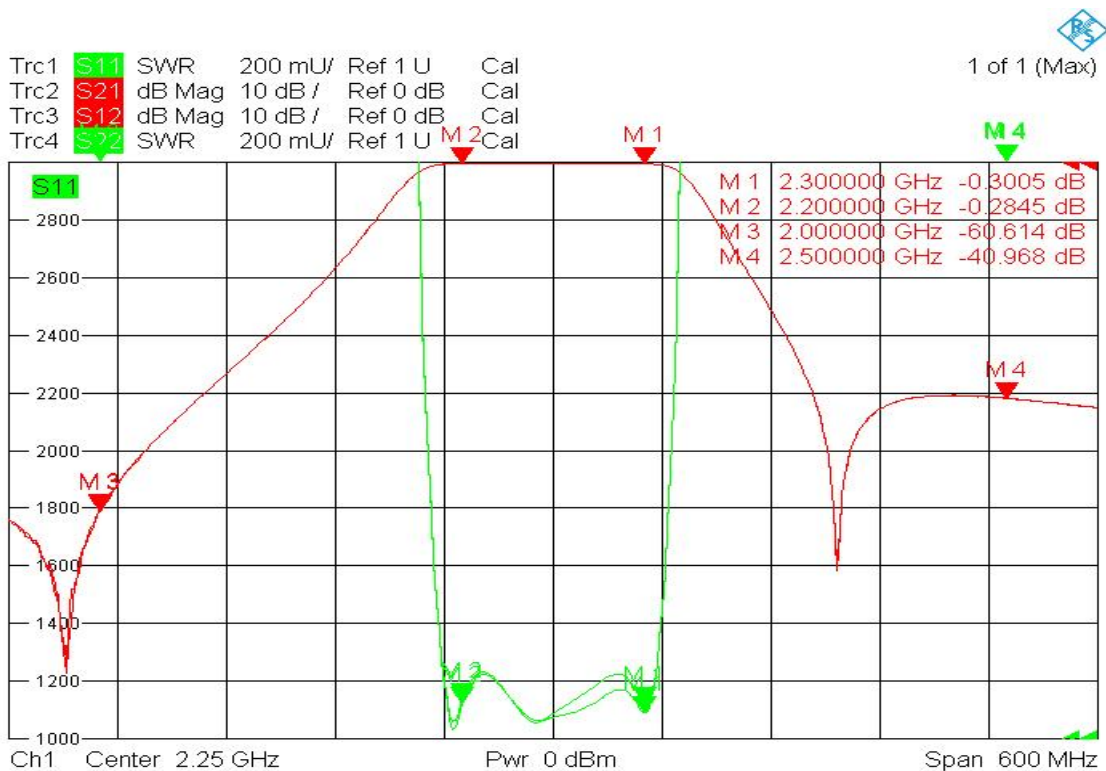

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.