

Coaxial Band-pass Filter

3.1-3.3 GHz/SMA Female

Model: TLBF-3G2-200M-E

TLBF-3G2-200M-E is a coaxial band-pass filter with a passband frequency from 3.1 to 3.3 GHz and a rejection frequencies from DC-2.9GHz and 3.5 GHz. The maximum fo insertion loss of the filter is 1.0 dB and the typical rejection is 10 dB.

Features:

- Passband Frequency Range 3.1 to 3.3 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	3.1		3.3	GHz
Band Width			0.2	GHz
Insertion Loss(fo)			1.0	dB
Pass Band Ripple			0.8	dB
Rejection	>10dB@DC-2900MHz 3500MHz			
Power Handling			30	W
VSWR			1.6	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	

Outline Drawing:

Unit:mm

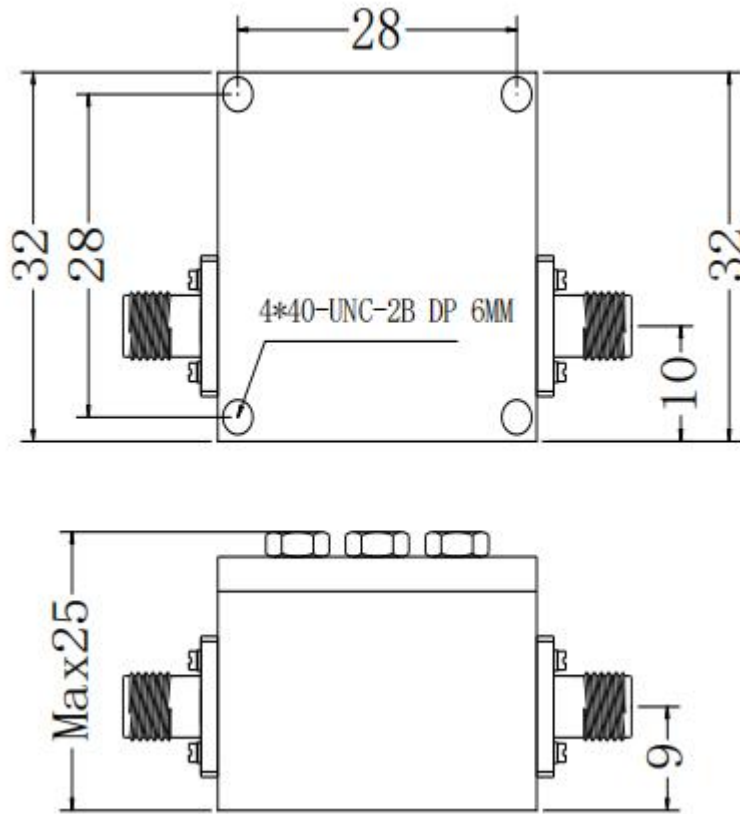

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-3G2-200M-E	Coaxial Band-pass Filter, Passband frequency range: 3.1-3.3GHz, fo Insertion Loss: 1.0dB, SMA Female	Rev.1.0