

Power Amplifier

WR-3.4/300-317GHz/9dB Gain/11dBm Psat

Model: TMPA-300317-1212-3.4

TMPA-300317-1212-3.4 is a power amplifier with a typical small signal gain of 9 dB and a nominal Psat of 11 dBm across the frequency range of 300 to 317 GHz. The DC power requirement for the amplifier is +8 VDC/180 mA. The input and output port configuration offers an inline structure with WR-3.4 waveguides and UG-387/U-M anticocking flanges.

Features:

- Frequency range: 300-317GHz
- Gain: 9dB Typ
- Output Power Psat: 11dBm Typ
- Good Power and Gain Flatness

Applications:

- Passive Imaging
- Communication Systems
- Radar Systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	300		317	GHz
Small Signal Gain		9		dB
Output Psat		11		dBm
Input VSWR			3	:1
DC Voltage		8		V DC
DC Supply Current		180		mA

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	WR-3.4/UG-387/U	
DC Bias	Solder Pin	
Size	20*40*23(With heatsink) 20*65*48(Without heatsink)	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+10 V
RF Input Power	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

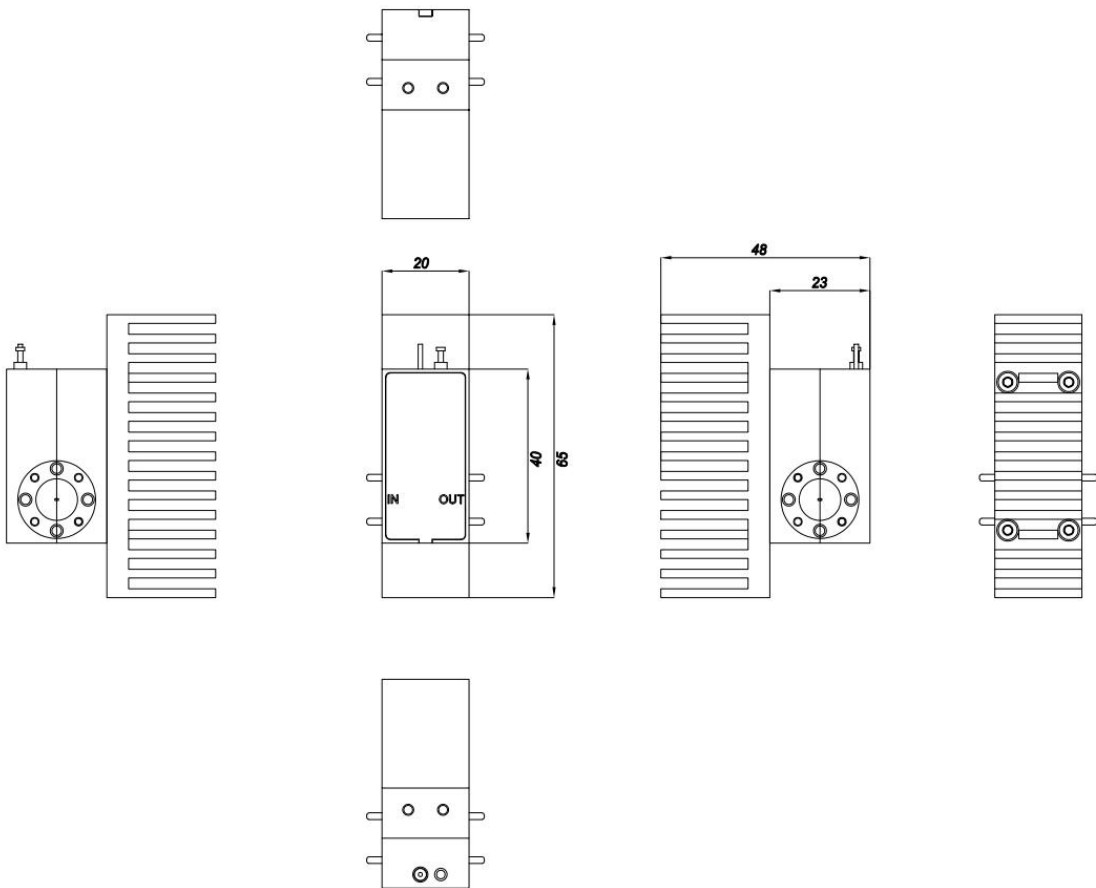

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TMPA-300317-1212-3.4	Power Amplifier, 300-317GHz, Gain: 9dB Type, Psat: 11dBm Type, +8V DC,WR-3.4, Without heasink	Rev.1.0
TMPA-300317-1212-3.4-HS	Power Amplifier, 300-317GHz, Gain: 9dB Type, Psat: 11dBm Type, +8V DC,WR-3.4, With heatsink	Rev.1.0

Typical Performance Data:


Gain vs Frequency

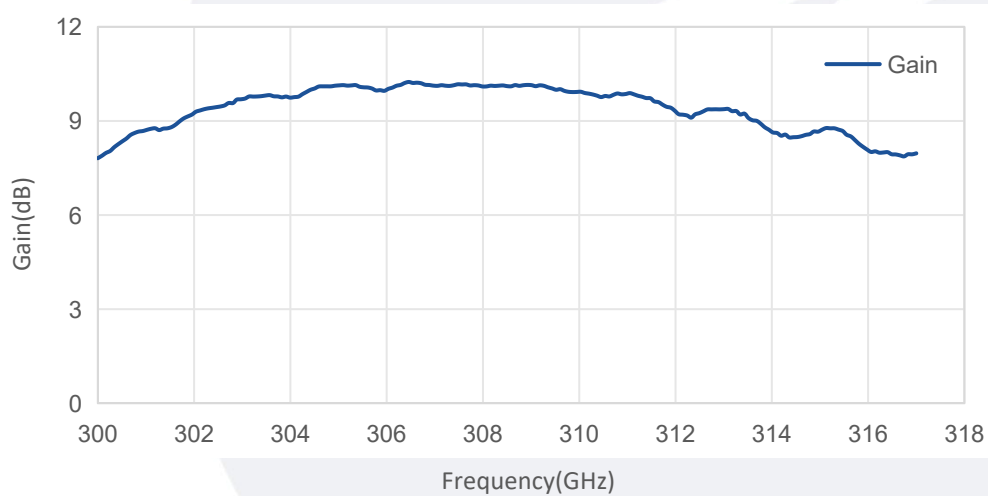


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Input VSWR vs Frequency

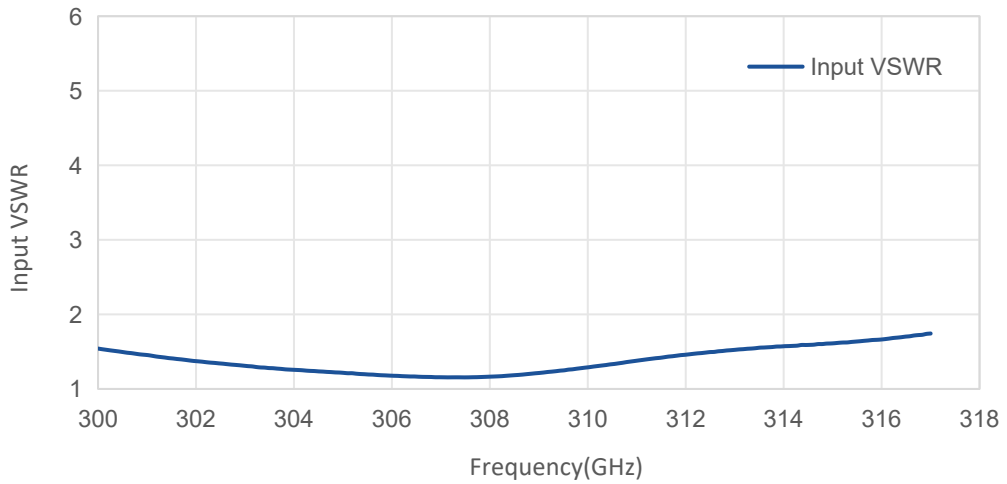

Psat vs Frequency

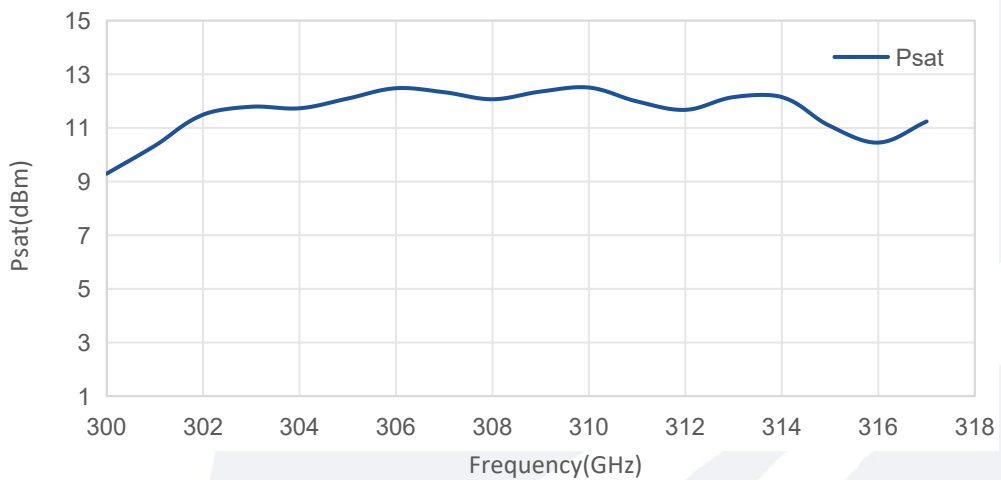

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.