

Coaxial Band-pass Filter

5.45-5.5 GHz/SMA Female

Model: TLBF-5G45-5G5-E

TLBF-5G45-5G5-E is a coaxial band-pass filter with a passband frequency from 5.45 to 5.5 GHz and a rejection frequencies from 5.05 GHz to 5.9GHz. The maximum insertion loss of the filter is 1.2 dB and the typical rejection is 30 dB.

Features:

- Passband Frequency Range 5.45 to 5.5 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts
- Field Replaceable RF Connectors

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	5.45		5.5	GHz
Band Width			0.05	GHz
Passband Insertion Loss			1.2	dB
Pass Band Ripple			1.0	dB
Rejection	>30dB@FC(边频)±400Mhz			dB
Power Handling			15	W
VSWR			1.5	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	

Outline Drawing:

Unit:mm

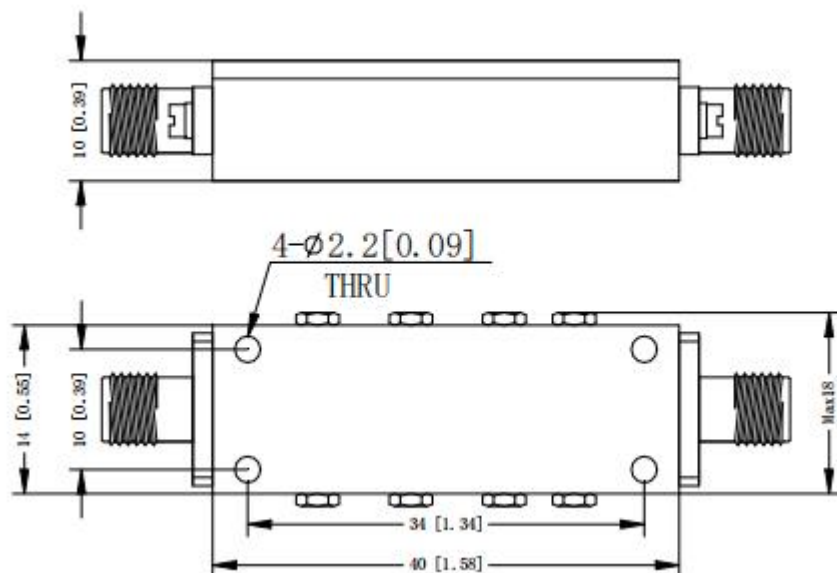


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-5G45-5G5-E	Coaxial Band-pass Filter, Passband frequency range: 5.45-5.5GHz, Passband Insertion Loss: 1.2dB, SMA Female	Rev.1.0

Typical Performance Data:

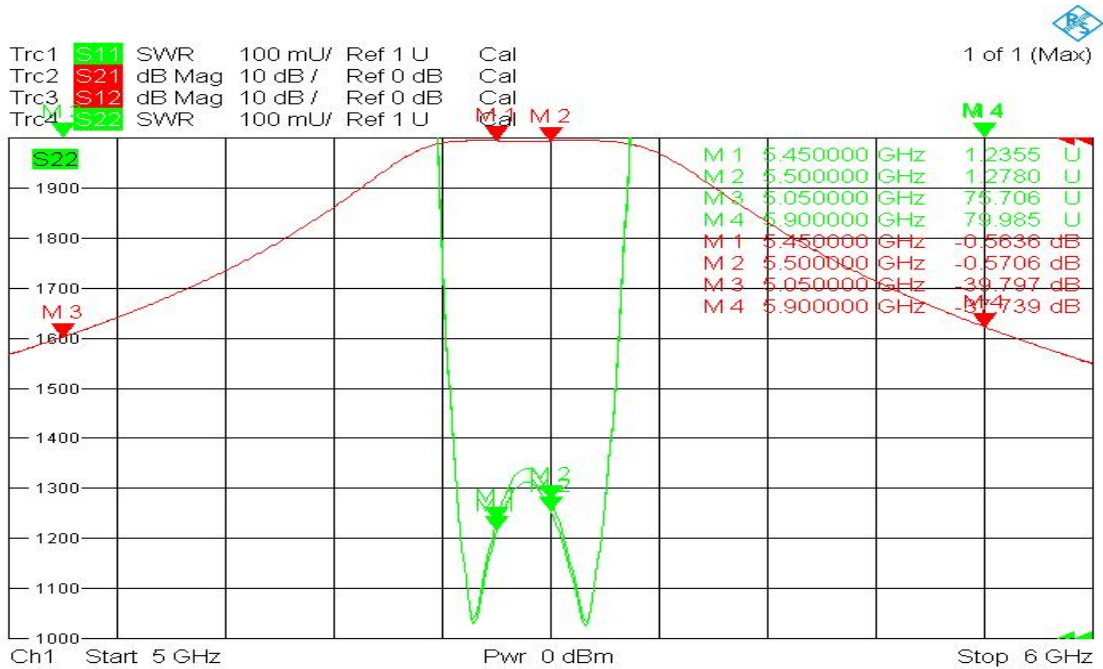

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.