

Power Amplifier

2-18GHz/30dB Gain/40dBm Psat

Model: TLPA2G18G-30-40

TLPA2G18G-30-40 is a power amplifier with typical small signal gain of 30 dB and a minimum Psat of 40 dBm across the frequency range of 2 to 18 GHz. The DC power requirement for the amplifier is +28 VDC/2.3 A. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 2-18GHz
- Gain: 30dB Typ
- Output Power Psat: 40dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	2		18	GHz
Small signal Gain		30		dB
Gain Flatness		±4		dB
Output Psat	40			dBm
Spurious@Pout=40dBm			-50	dBc
2nd Harmonic@Pout=40dBm		-10		dBc
Input VSWR		2		:1
DC Voltage		28		V DC
DC Supply Current		2.3		A
Impedance		50		Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Solder Pin	
Size	60*60*11.5(Without heatsink) 150*127*74.5(With heatsink)	mm


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+29 V
RF Input Power	+20 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing:

Unit:mm; Tolerance:±0.1mm

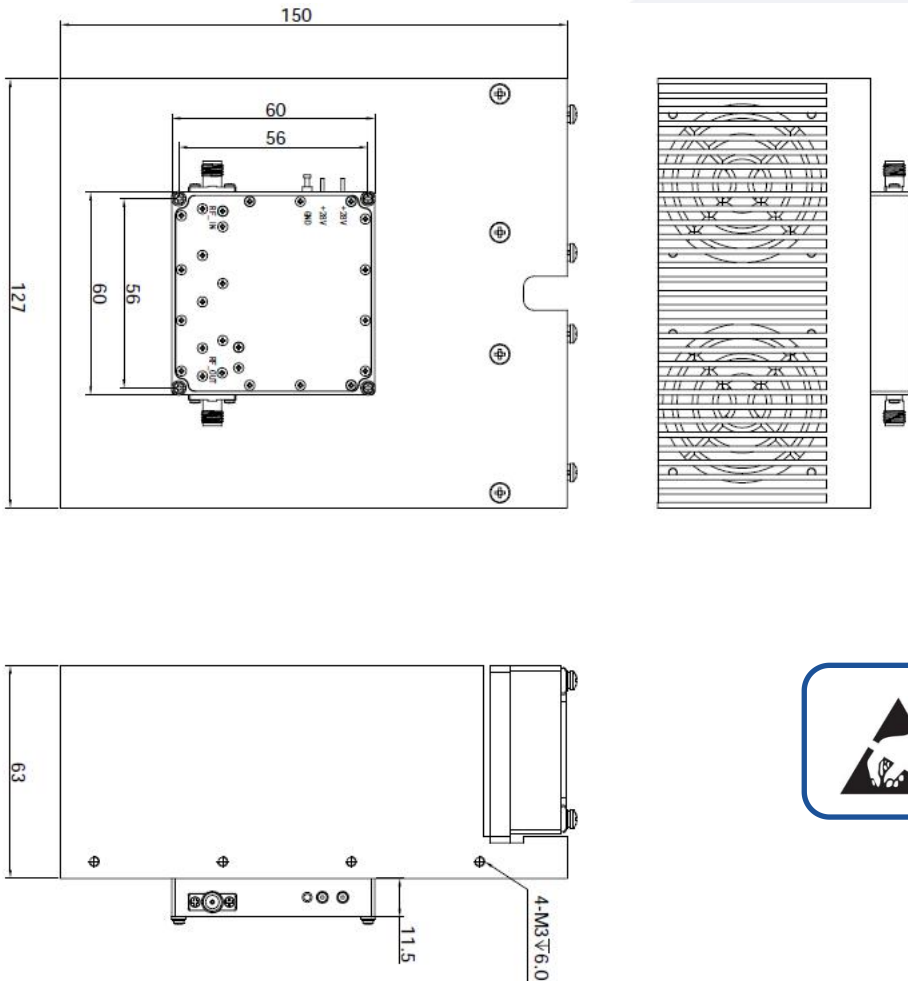

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+50	°C
Non-operating Temperature*	-50		+60	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA2G18G-30-40	Power amplifier 2-18GHz, Gain:30dB,Psat:40dBm,+28V DC,With Heatsink	Rev.1.0