

Coaxial Band-pass Filter

6.7-7 GHz/SMA Female

Model: TLBF-6G7-7G-E

TLBF-6G7-7G-E is a coaxial band-pass filter with a passband frequency from 6.7 to 7 GHz and a rejection frequencies from DC-6.5 GHz. The maximum insertion loss of the filter is 1.5 dB and the typical rejection is 30 dB.

Features:

- Passband Frequency Range 6.7 to 7 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts
- Field Replaceable RF Connectors

Applications:

- Instrumentations
- Radar Systems
- System Integrations


Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Passband Frequency range	6.7		7	GHz
Band Width			0.3	GHz
Passband Insertion Loss			1.5	dB
Pass Band Ripple	1.3			dB
带外抑制 Rejection	>30dB@DC-6.5Ghz			dB
耐受功率 Power Handling			15	W
驻波 VSWR			1.5	:1
阻抗 Impedance	50			Ohms

Environmental And Physical Characteristics:

Description	Parameter	Units
Operating Temperature	-40 To +70	°C
Connectors	SMA Female	

Outline Drawing: Unit:mm

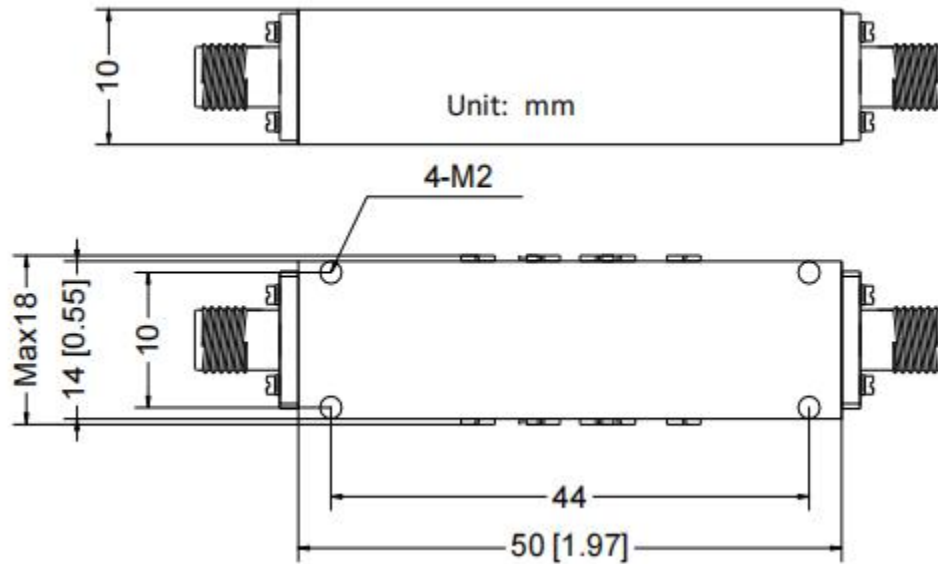


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-6G7-7G-E	Coaxial Band-pass Filter, Passband frequency range: 6.7-7GHz, Insertion Loss: 1.5dB, SMA Female	Rev.1.0

Typical Performance Data:

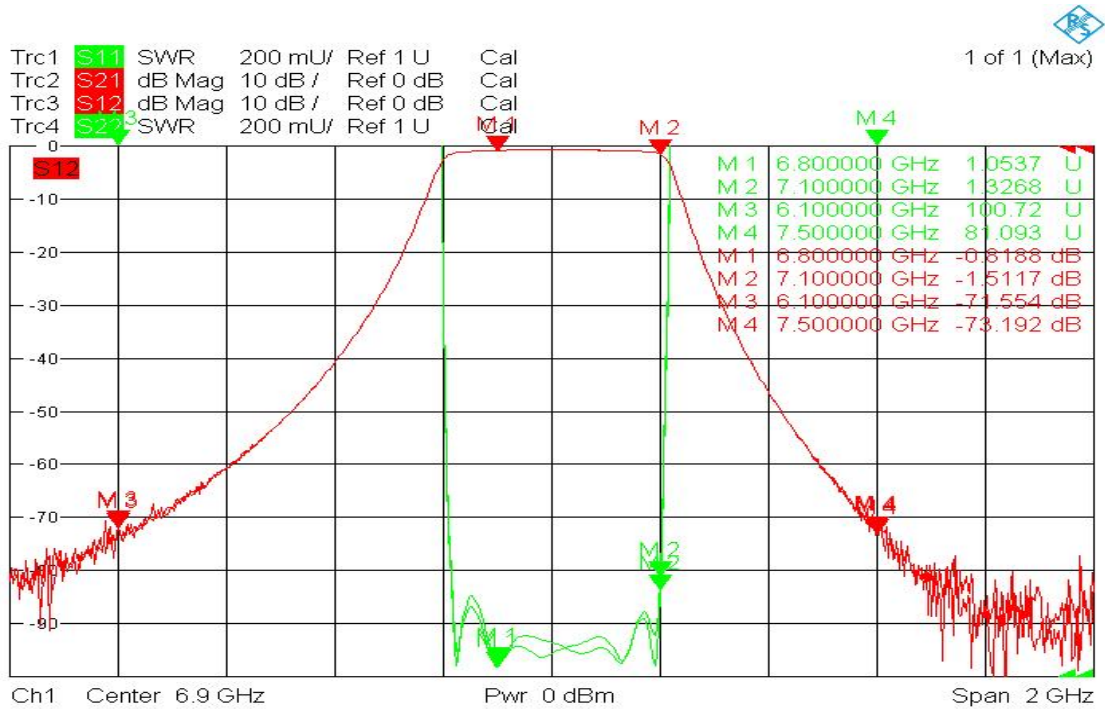

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.