

Coaxial Band-pass Filter

6.61-6.91 GHz/SMA Female

Model: TLBF-6G76-300M-E

TLBF-6G76-300M-E is a coaxial band-pass filter with a passband frequency from 6.61 to 6.91 GHz and a rejection frequencies from 6.16 GHz to 7.36 GHz. The maximum insertion loss of the filter is 1.8 dB and the typical rejection is 50 dB.

Features:

- Passband Frequency Range 6.61 to 6.91 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts
- Field Replaceable RF Connectors

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:



Parameter	Min	Typ	Max	Units
Passband Frequency range	6.61		6.91	GHz
Band Width			0.3	GHz
Passband Insertion Loss			1.8	dB
Pass Band Ripple			1.0	dB
Rejection	>50dB@fc+-450MHz			
Power Handling			50	W
VSWR			1.6	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	

Outline Drawing:

Unit:mm

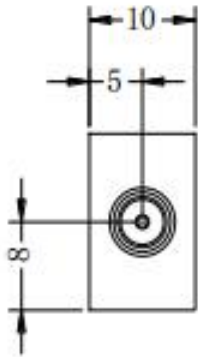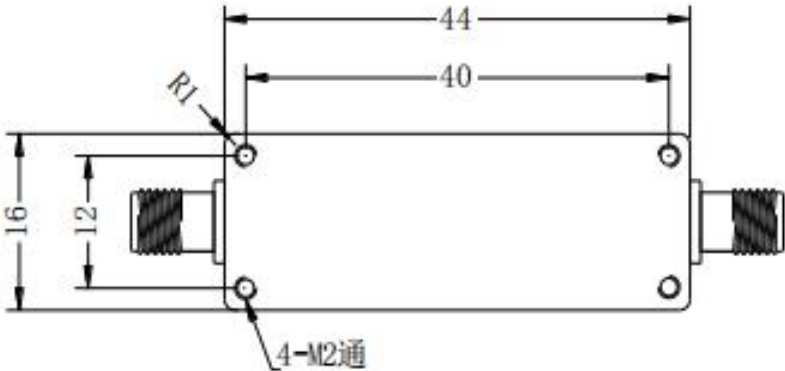


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-6G76-300M-E	Coaxial Band-pass Filter, Passband frequency range: 6.61-6.91GHz, Passband Insertion Loss: 1.8dB, SMA Female	Rev.1.0

Typical Performance Data:

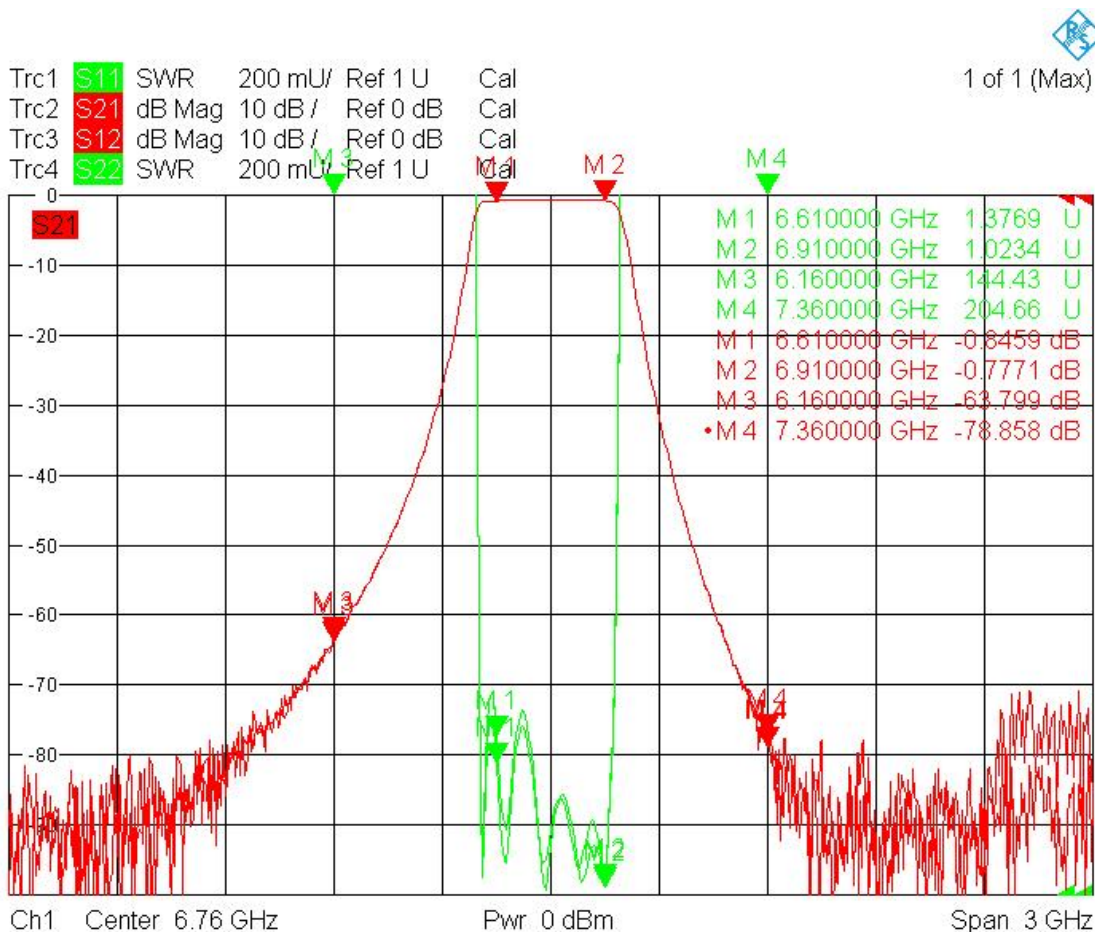

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.