

Coaxial Band-pass Filter

15-105 MHz/N Female

Model: TLBF-15M-105M-N-100W

TLBF-15M-105M-N-100W is a coaxial band-pass filter with a passband frequency from 15 to 105 MHz and a rejection frequencies from DC to 11 MHz and from 140 to 400 MHz. The maximum insertion loss of the filter is 0.8 dB and the minimum rejection is 30 dB.

Features:

- Passband Frequency Range 15 to 105 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations


Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Passband Frequency range	15		105	MHz
Passband Insertion Loss			0.8	dB
VSWR			1.5	:1
Rejection@DC-11MHz& 140-400MHz	30			dB
Power Handling		100		W
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Temerature Range	-55 To +85	°C
Connectors	N Female	
Size	20*22*60	mm

Outline Drawing:Unit:mm

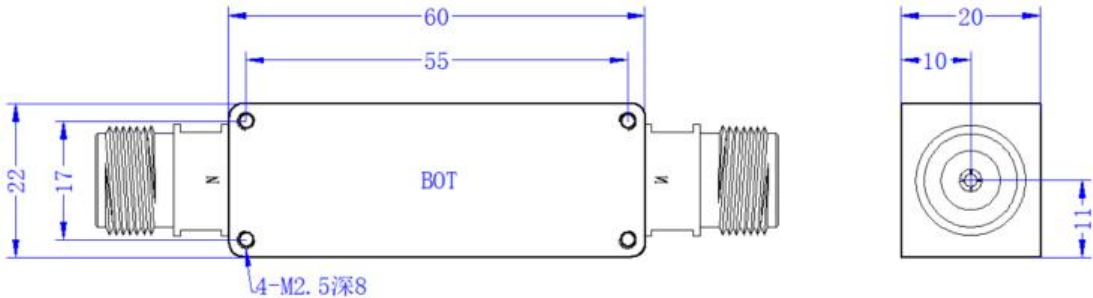




ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-15M-105M-N-100W	Coaxial Band-pass Filter,Passband frequency range:15-105MHz,Passband Insertion Loss:0.8dB, N Female	Rev.1.0

Typical Performance Data:

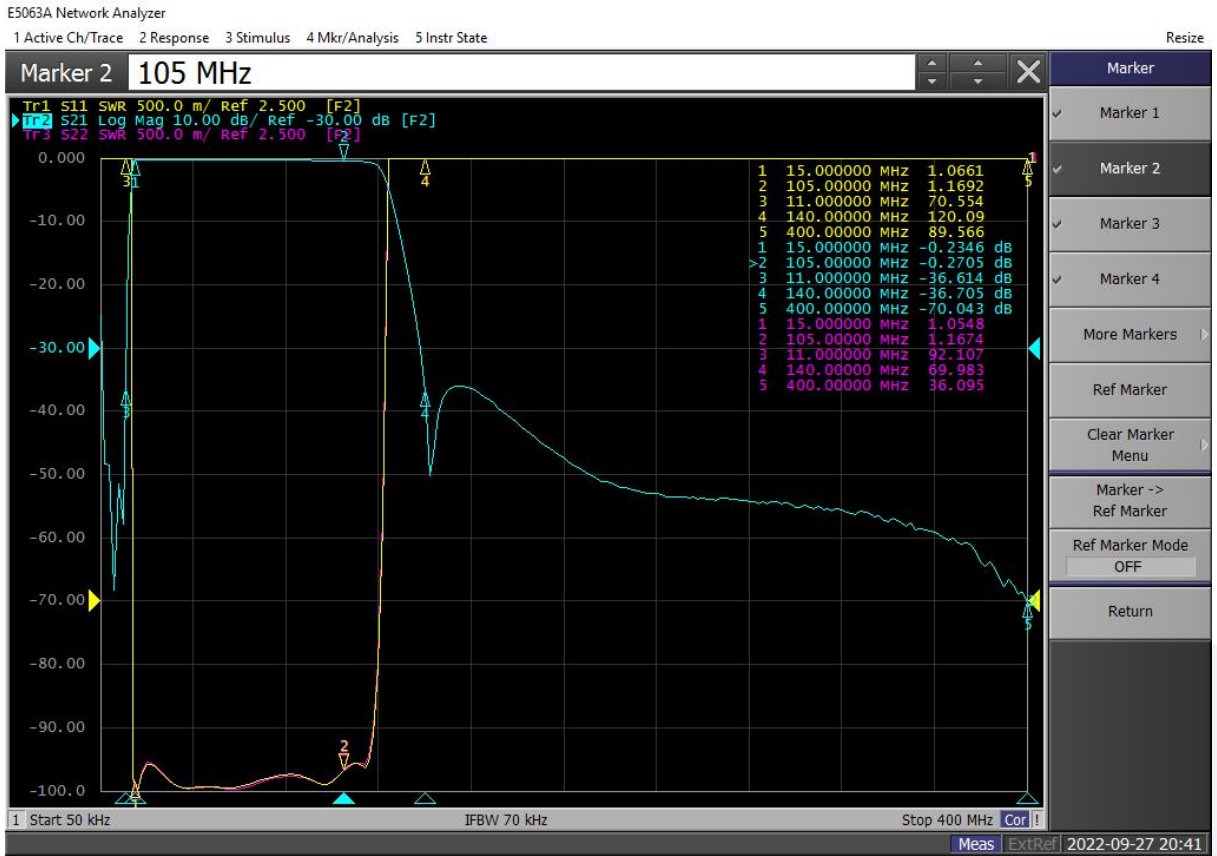

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.