

Coaxial Band-pass Filter

920-950 MHz/N Female

Model: TLBF-920M-950M-N-100W

TLBF-920M-950M-N-100W is a coaxial band-pass filter with a passband frequency from 920 to 950 MHz and a rejection frequencies from DC to 885 MHz and from 985 to 2000 MHz. The maximum insertion loss of the filter is 0.8 dB and the minimum rejection is 30 dB.

Features:

- Passband Frequency Range 920 to 950 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	920		950	MHz
Passband Insertion Loss			0.8	dB
VSWR			1.5	:1
Rejection@DC-885MHz& 985-2000MHz	30			dB
Power Handling		100		W
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Temerature Range	-55 To +85	°C
Connectors	N Female	
Size	50*72*72	mm

Outline Drawing:

Unit:mm

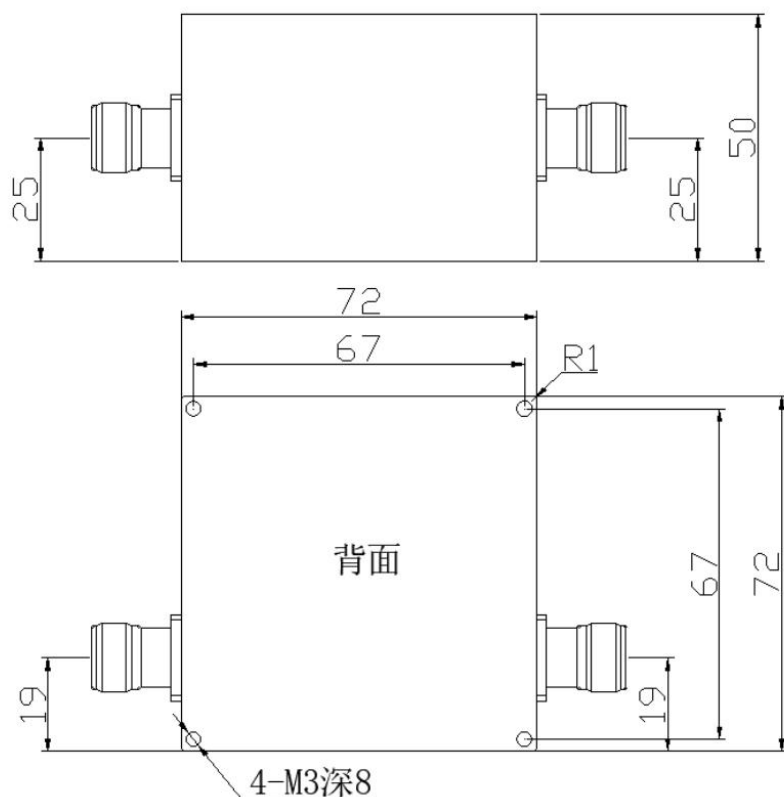


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-920M-950M-N-100W	Coaxial Band-pass Filter, Passband frequency range: 920-950MHz, Passband Insertion Loss: 0.8dB, N Female	Rev.1.0

Typical Performance Data:

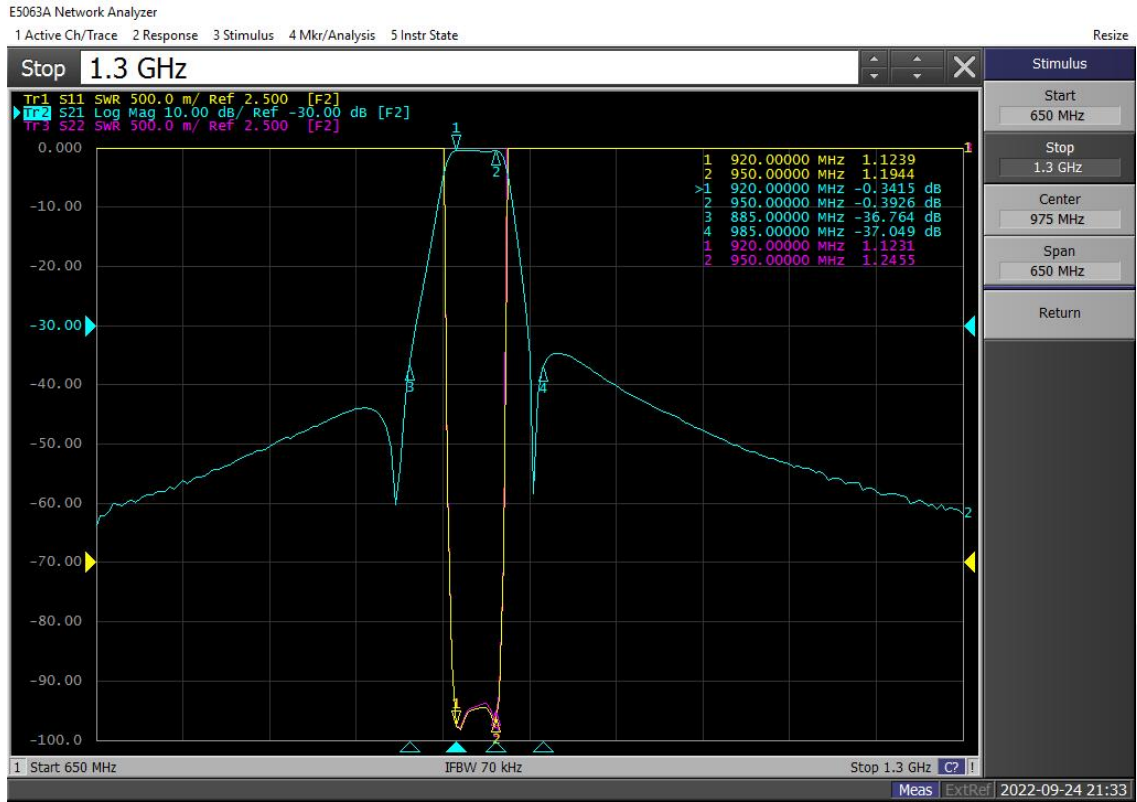

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.