

Y-Band Frequency Extender 170-260GHz/WR-04

Model: TLSE-170260-1030-04

TLSE-170260-1030-04 frequency extenders are a dedicated Test & Measurement solution for extending the range of your signal source to 170-260 GHz.

Features:

- Frequency range: 170-260 GHz
- Output Power : 10dBm Typ
- Low power consumption

Applications:

- Frequency Extension
- Antenna measurements
- Material characterisation

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	170		260	GHz
Output Power		10		dBm
Dynamic Range (Optional mechanical Attenuator)	0		30	dB
Input Frequency	9.44		14.44	GHz
Input Power	3	5	7	dBm
Multiplication Factor		18		
Harmonic Suppression		-20		dBc
Input VSWR		2		:1
Output VSWR		2		:1
Supply Voltage	100	220	240	V

Mechanical Specifications:


Parameter	Value	Units
Input Connector	SMA Female	
Output Connector	WR-04/UG-387/U	
DC Bias	Power adapter: 100-240VAC	
Size	170*75*68	mm

Absolute Maximum Ratings:


Parameter	Value
Supply Bias Voltage	+240 V AC
RF Input Power	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

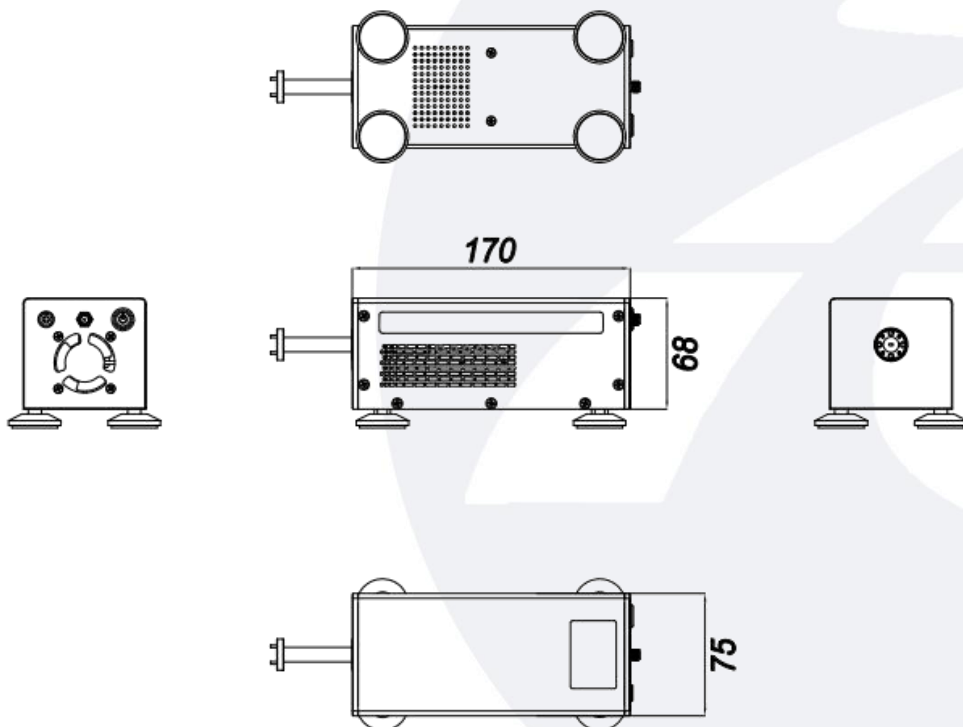

Block Diagrams:

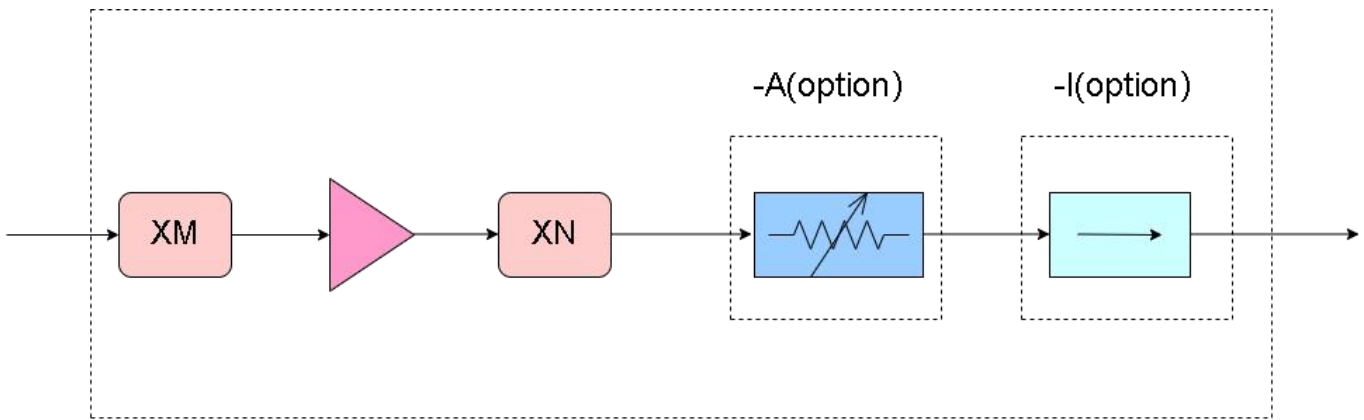

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Part Number	Description	Option		Revision
		Optional Mechanical Attenuator	Isolation	
TLSE-170260-1030-04	Y-Band Frequency Extender,X18,170-260GHz, Output Power: 10 dBm	-A	-I	Rev.1.2

Components Included:

Part Number	Description	Quantity
TLACTDC-22012	AC-to-DC Power Adapter	1 PCS