

Passive Frequency Multiplier

WR-3.4/X3/220-330GHz/3dBm Output Power

Model: TMPM-220330-0307-3.4

TMPM-220330-0307-3.4 is a WR-3.4 X3 passive multiplier that generates third order harmonics with good harmonic and fundamental suppression. This multiplier requires an input frequency range of 73.5 to 110 GHz at +21 dBm RF power to yield typical +3 dBm output power at 220 to 330 GHz. The multiplier is equipped with a WR-10 waveguide and UG-387/U-M flange as its input port and a WR-3.4 waveguide and UG-387/U-M flange as its output port.

Features:

- Output Frequency: 220-330GHz
- Output Power: 3dBm Typ
- Compactness, High Power & Efficiency

Applications:

- Frequency Extenders
- THz Systems
- Source Modules

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
输出频率 Output Frequency	220		330	GHz
输入频率 Input Frequency	73.5		110	GHz
输出功率 Output Power		3		dBm
输入功率 Input Power		21	23	dBm
倍频次数 Multiply Factor		3		

机械特性 Mechanical Specifications:





参数 Parameter	指标 Value	单位 Units
输出接口 Output Connector	WR-3.4/UG-387/U	
输入接口 Input Connector	WR-10/UG-387/U	
尺寸 Size	24*20*20.97	mm

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
输入功率 RF Input Power	TBD
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

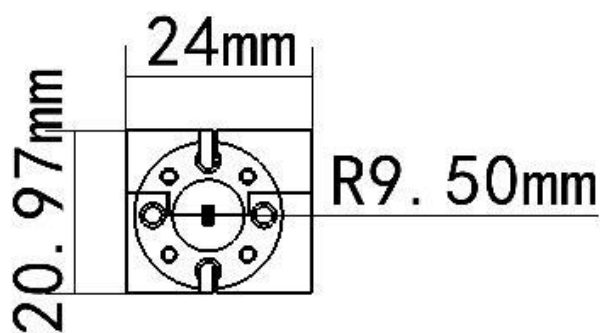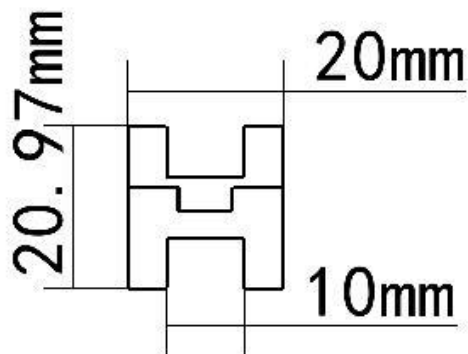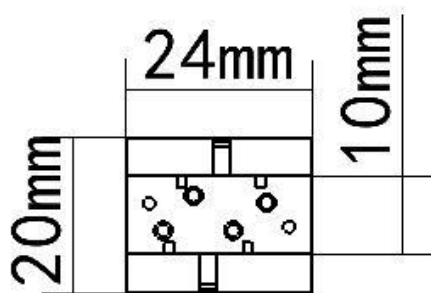

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.


温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-10		+65	℃
存储温度 Non-operating Temperature	-45		+85	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TMPM-220330-0307-3.4	Passive Frequency Multiplier X3, 220-330GHz, 3dBm Output Power,WR-3.4	Rev.1.1

典型曲线 Typical Performance Data:

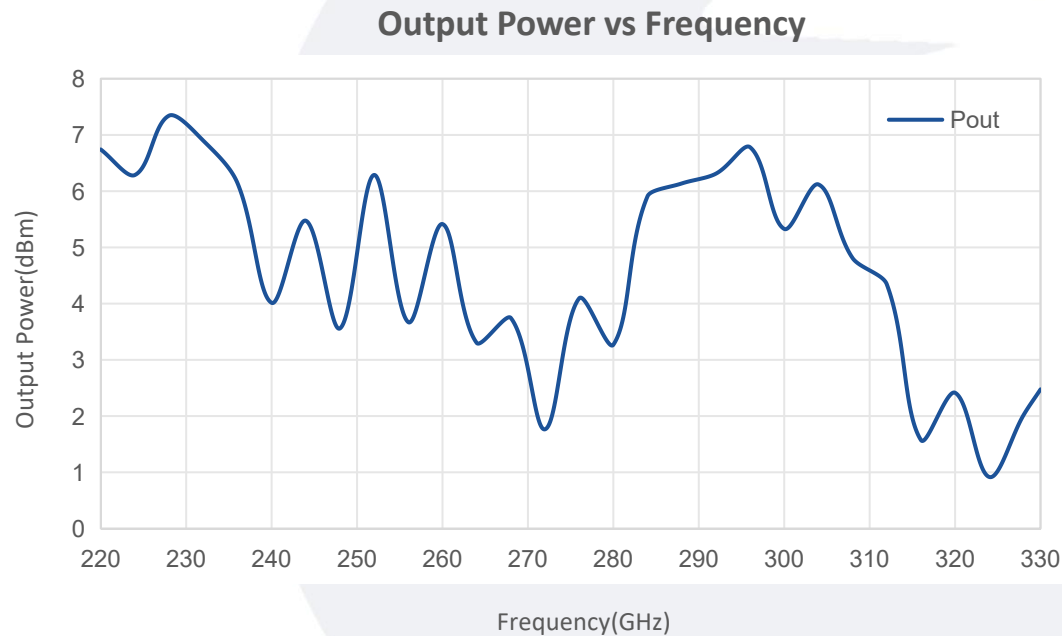

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.