Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Coaxial Band-pass Filter

Center Frequency 300 MHz/SMA Female Model: TLBF-300M-15M-L

TLBF-300M-15M-L is a coaxial band-pass filter with a passband center frequency at 300 MHz and a rejection frequencies at fc±50MHz. The maximum insertion loss of the filter is 3.0 dB and the minimum rejection is 40 dB.

Features:

- Passband Center Frequency 300 MHz
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Passband Frequency range	292.5		307.5	MHz
Band Width			15	MHz
Insertion Loss(f0)			3.0	dB
Pass Band Ripple			2.8	dB
VSWR			1.6	:1
Rejection@fc±50MHz	40			dB
Power Handling			2	W
Impedance	50			Ohms


Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	℃
Connectors	SMA Female	
Size	10*12*40.4	mm

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Outline Drawing:

Unit:mm

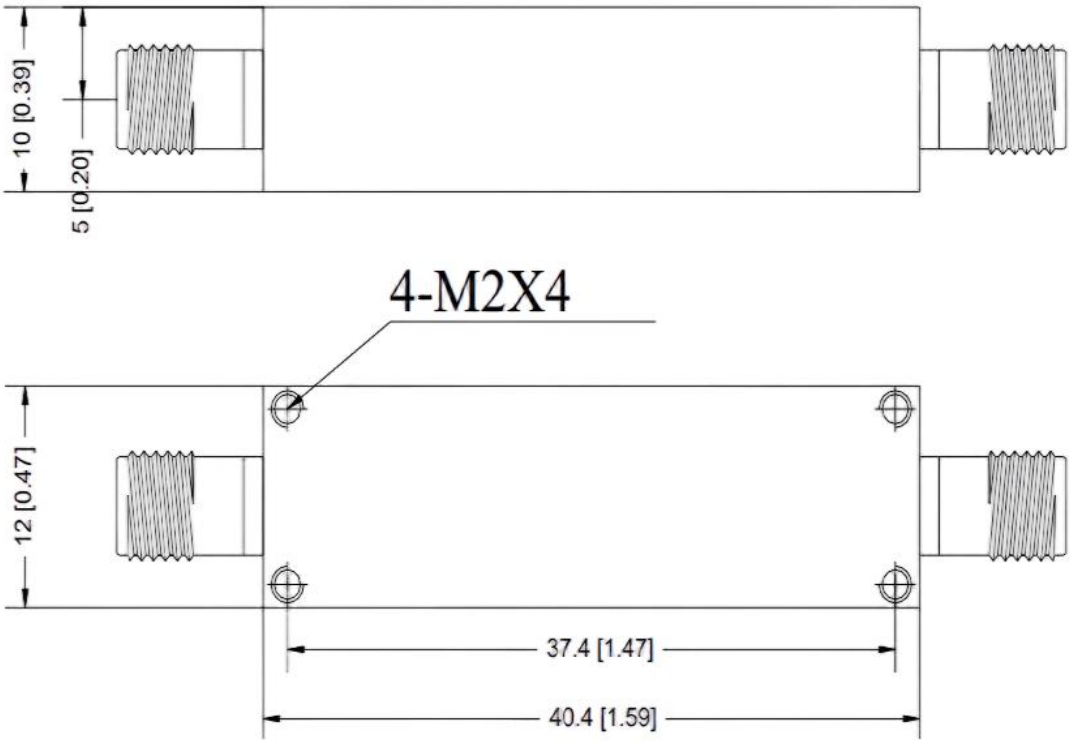


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-300M-15M-L	Coaxial Band-pass Filter,Passband center frequency: 300MHz,Insertion Loss(f0):3.0dB, SMA Female	Rev.1.0

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

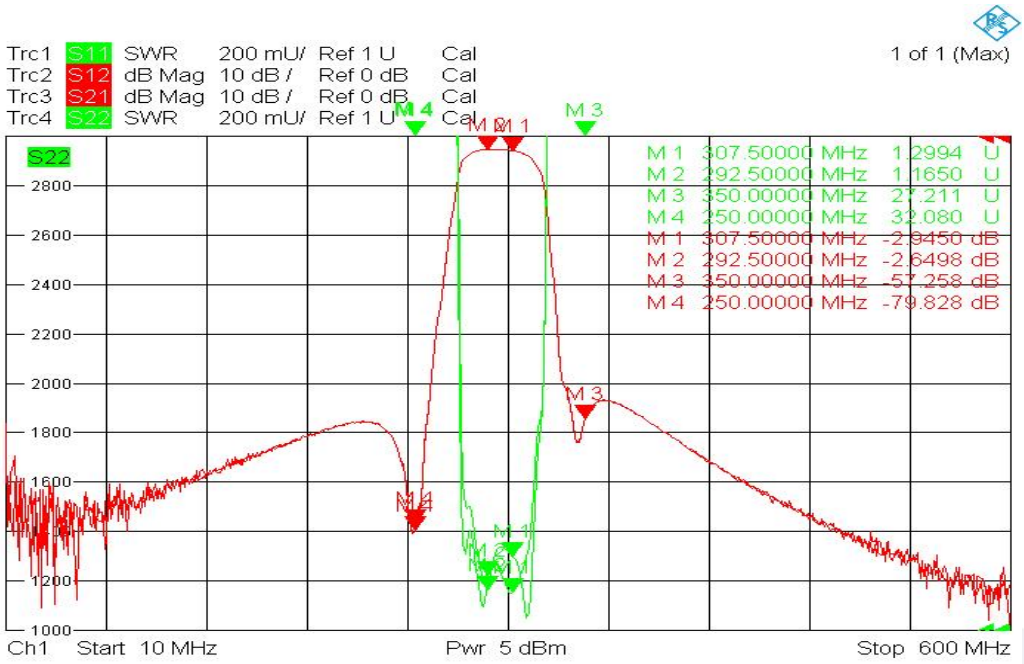

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.