泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Coax Directional Coupler

0.8-2.5GHz/20dB Coupling/SMA Female

Model: TC-0825-20S

TC-0825-20S is a coaxial directional coupler that delivers a 20 dB nominal coupling level and 20 dB minimum directivity across the full frequency range from 0.8 to 2.5 GHz. It is a three-port passive device that can couple a portion of the power from the main transmission line to the auxiliary line in a directional manner.

Features:

- Output Frequency: 0.8-2.5GHz
- Coupling: 20dB Typ
- Stackable mechanical design
- Low Insertion Loss
- Moderate Directivity
- 50 Ohm Matched Input / Output

Applications:

- Test Labs
- Instrumentations
- Sub-assemblies

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency Range	0.8		2.5	GHz
Insertion Loss (Excl Coupling)			0.4	dB
Coupling		20±1		dB
Directivity	20			dB
Power Handling			50	W
VSWR			1.25	:1
Impedance		50		Ohms


Mechanical Specifications:

Parameter	Value	Units
Input/Output Connector	SMA Female/SMA Female	
Size	105*24*14	mm

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

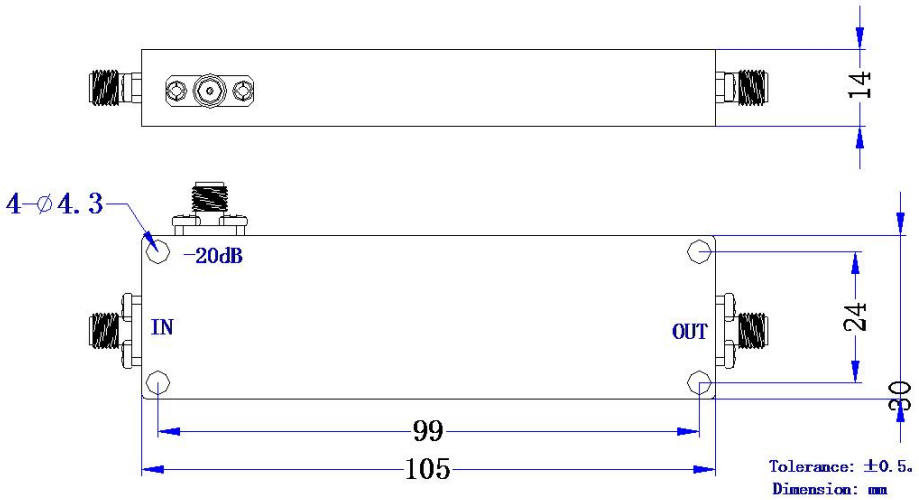

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Temperature Range	-45		+85	℃
Relative humidity	100% RH at 35c, 95%RH at 40℃			%
Altitude	50,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TC-0825-20S	Coaxial Directional Coupler 0.8-2.5GHz, Coulping:20dB, SMA Female	Rev.1.0

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

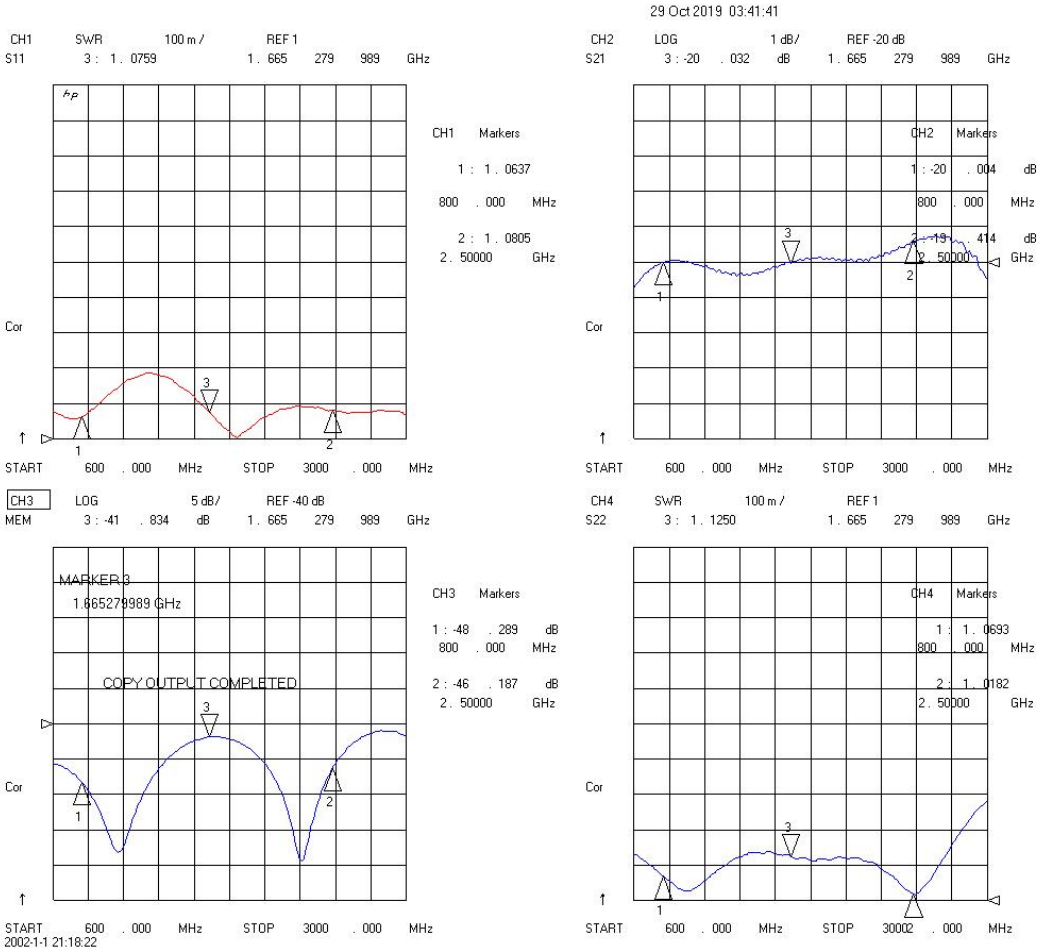

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.