泰莱微波 Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Dual Polarized Horn Antenna

SMA Female/5-15GHz/5dBi Min, Gain

Model: TL-50150DPHA5S

TL-50150DPHA5S is a dual polarized horn antenna that operates from 5 to 15GHz, The antenna offers 5dBi minimum gain. The antenna VSWR is 2.5:1 maximum. The antenna cross polarization isolation is typical 25 dB. The antenna RF port is configuration offers coax adapter structure with SMA female. It can be widely used in EMI detection, orientation, reconnaissance, antenna gain and pattern measurement and other application fields.

Features:

- Operating Frequency 5 to 15GHz
- Gain: 5dBi Min
- Dual Linear Polarization

Applications:

- Radar Systems
- Communication Systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	5		15	GHz
增益 Gain	5			dBi
极化方式 Polarization mode	Dual Linear			
驻波 Input VSWR			2.5	:1
1dB波束宽度 1dB Antenna Beamwidth	25			°
3dB波束宽度 3dB Antenna Beamwidth	40			°
交叉极化隔离 Cross Polarization Isolation	25(0°)			dB


机械特性 Physical Characteristics:

参数 Parameter	指标 Value	单位 Units
材质 Material	Aluminum	
表面处理 Finish	Conductive oxidation, spray sea gray paint	
接口 Connectors	SMA Female	
尺寸 Size	ø70*100	mm

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

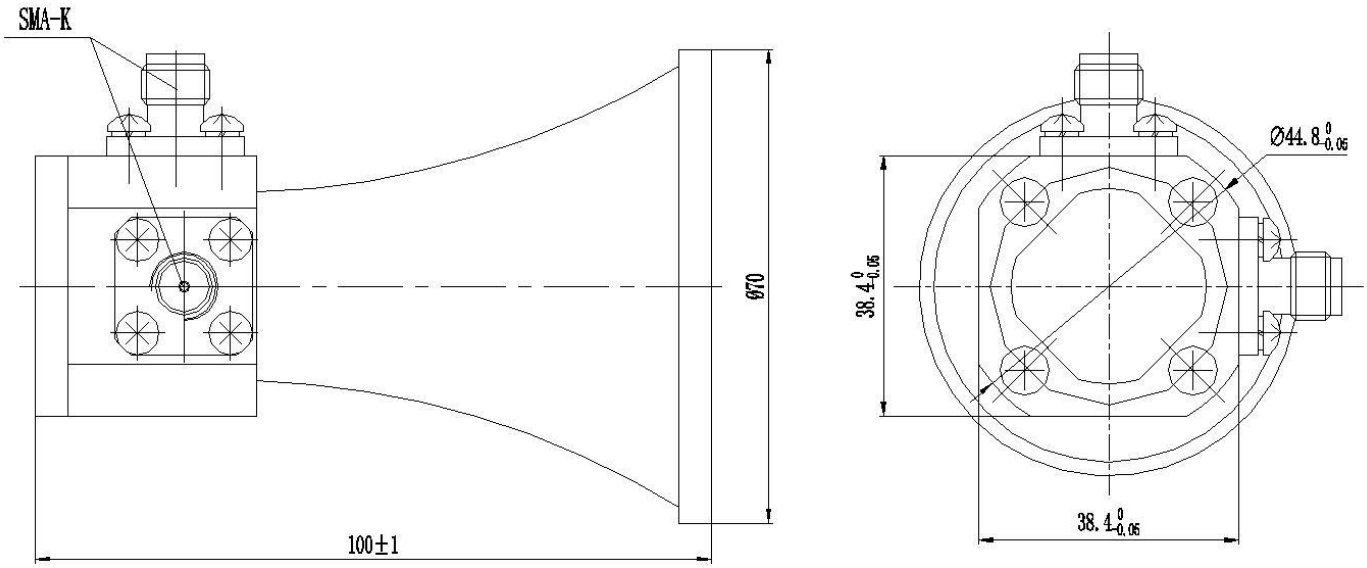

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TL-50150DPHA5S	Dual Polarized Horn Antenna, 5-15GHz,Gain: 5dBi Min,SMA Female	Rev.1.0