

Model:TLLA50K67G-25-50

Low Noise Amplifier

50KHz-67GHz, NF:5.0dB, Gain:25dB,P1B:15dBm

Feature:

- Ultra Wide Band: 50KHz-67GHz
- Gain: 25dB Type
- Noise Figure:5.0dB Typ
- Unconditional stability
- 50 Ohm Matched Input / Output

电气特性 Electrical:

参数Parameter	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	50KHz-67GHz			GHz
增益 Gain		25		dB
增益平坦度 Gain Flantness		±2		
噪声系数 Noise Figure		5		dB
线性输出功率 Output P1dB		15		dBm
输出三阶交调 Output IP3		20		dBm
输入驻波 Input VSWR		2.0		: 1
输出驻波 Output VSWR		2.0		: 1
直流电压 DC Voltage		+12		V DC
直流供电 DC power supply		100		mA
阻抗 Impedance	50			Ohms

机械特性 Mechanical :

参数Parameter	指标 Value	单位Units
输入/输出接口 Input/Output Connector	1.85mm-Female	
直流偏置 Bias	Solder Pin	
尺寸 Size	44.8*29.2*11	mm
重量 Weight	/	g





绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF INPUT POWER	10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm(Inches)

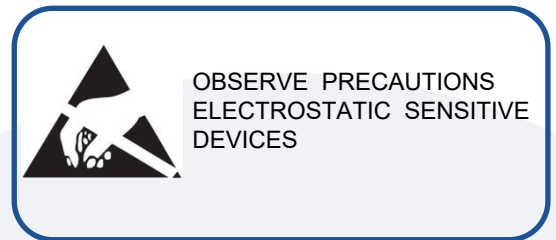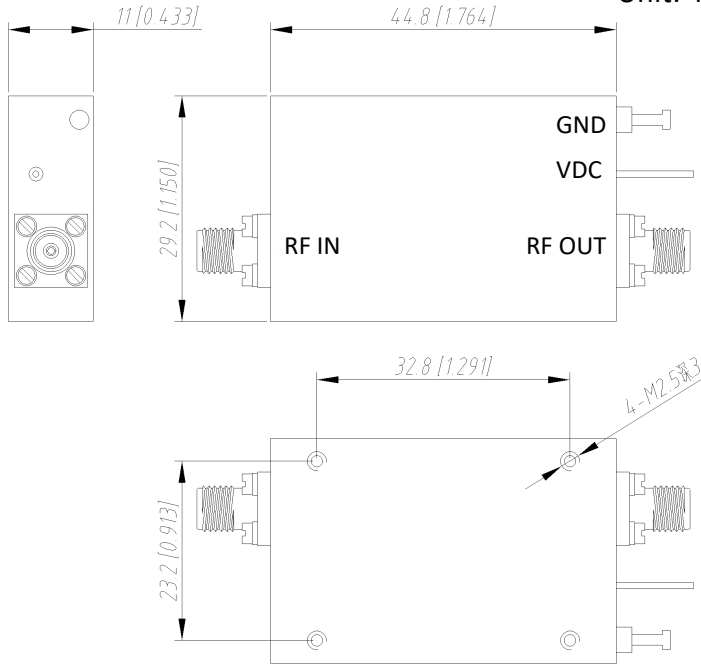

温度环境 Environmental Conditions:


参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-40		+75	°C
存储温度 Non-operating Temperature	-55		+85	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Part Number	描述 Description	版本号Revision
TLLA50K50G-33-60	Low Noise Amplifier 50KHz-50GHz, NF:6.0dB, Gain:32dB,2.4mm-F	Rev.1.1

典型曲线 Typical Performance Data:


Gain&VSWR vs Frequency

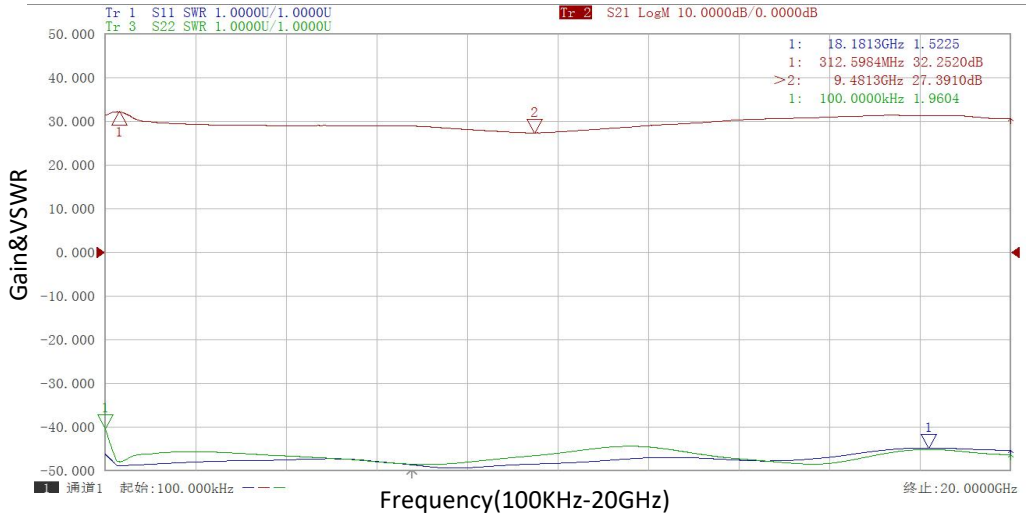

Gain&VSWR vs Frequency

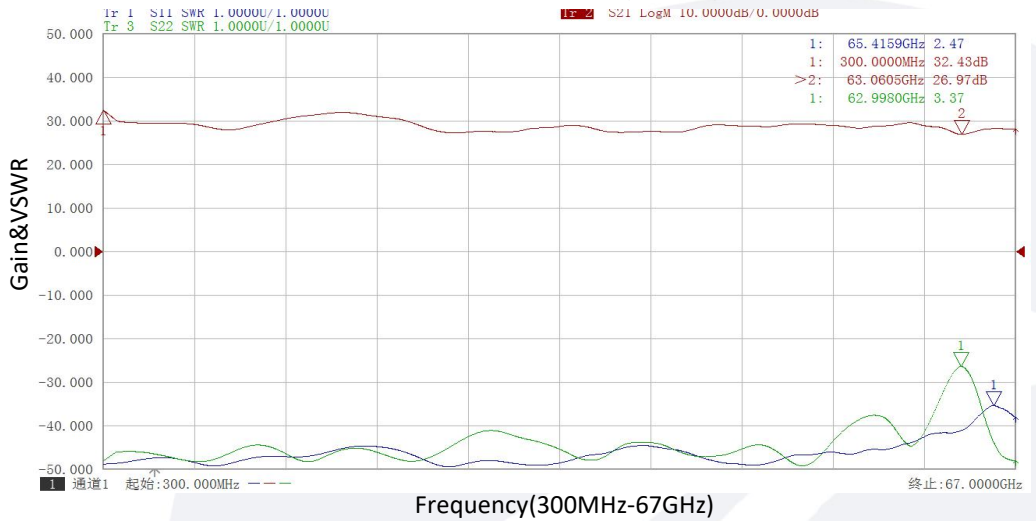


Noise Figure vs Frequency

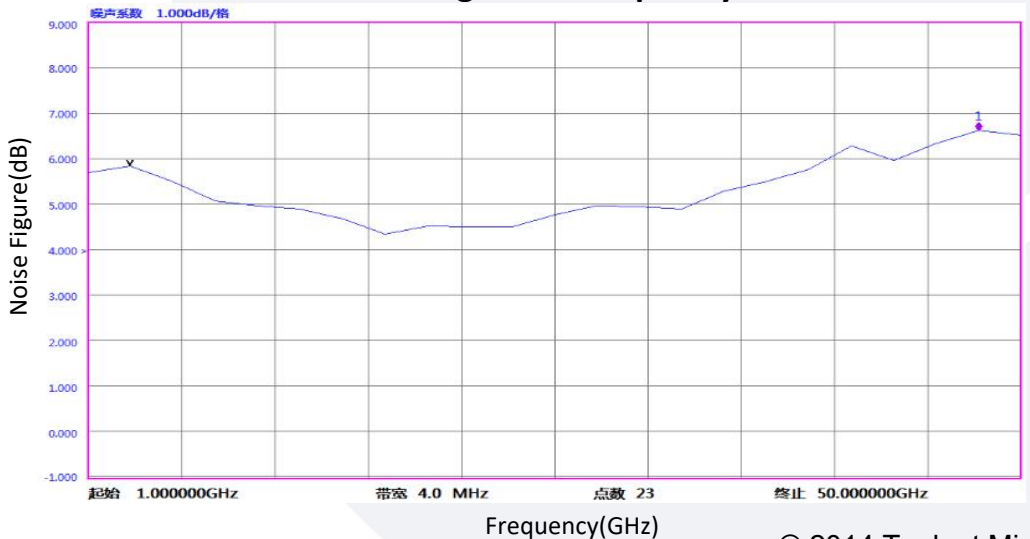

典型曲线 Typical Performance Data:

Gain vs Output Power

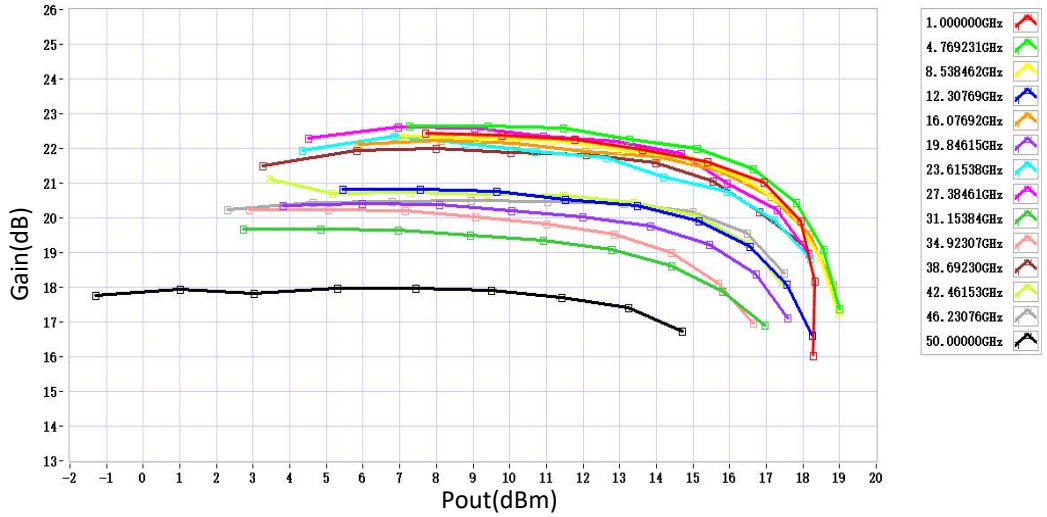

P1dB vs Frequency

