

## V-Band VNA Frequency Extender

50-75GHz /WR-15

Model: TLVE-5075-16-A/TLVE-5075-16

TLVE-5075-16 frequency extenders are a dedicated Test & Measurement solution for extending the range of your Vector Network Analyzer (VNA) to 50-75 GHz.

### Features:

- Ultra Wide Band: 50-75 GHz
- Port Output Power (No Attenuation): 12 dBm Typ
- Dynamic Range @ 10 Hz BW: 110dB Typ
- Unconditional stability

### Applications:

- VNA Frequency Extension
- Antenna measurements
- Material characterisation

### Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	50		75	GHz
Test Port Output Power		12		dBm
Test Port Input Power (Damage)			20	dBm
Output Power Attenuation (Option:Variable attenuators)	0		30	dB
Dynamic Range @ 10Hz BW	100	110		dB
RF Input Frequency	12.5		18.75	GHz
RF Input Power	3	5	7	dBm
RF Multiplication Factor		4		
LO Input Frequency	12.5		18.75	GHz
LO Input Power	3	5	7	dBm
LO Multiplication Factor		4		
IF Frequency Range	1		1000	MHz
Effective Directionality@10Hz BW		50		dB
Payload Matching@10Hz BW		60		dB
ReflectionTracking@10Hz BW		±0.01		dB
Transmission Tracking@10Hz BW		±0.02		dB
Amplitude stability @300 Hz BW		±0.1		dB
Phase Stability @300 Hz BW		±2		°

### Mechanical Specifications:


Parameter	Value
RF/LO Input Connector	SMA Female
MEA/REF IF Output Connector	SMA Female
Test Port Connector	WR-15/UG-385/U
Power Supply Pin	FGG 0B 4 Core
Size	242*81*46.2mm

### Absolute Maximum Ratings :

Description	Parameter	Units
Test Port Input Power	+20	dBm
RF/LO Port Damage Level	+10	dBm
Supply Bias Voltage	+240 V AC	
ESD sensitivity (HBm)	Class 0, passed 150V	

### Outline Drawing:


Unit:mm

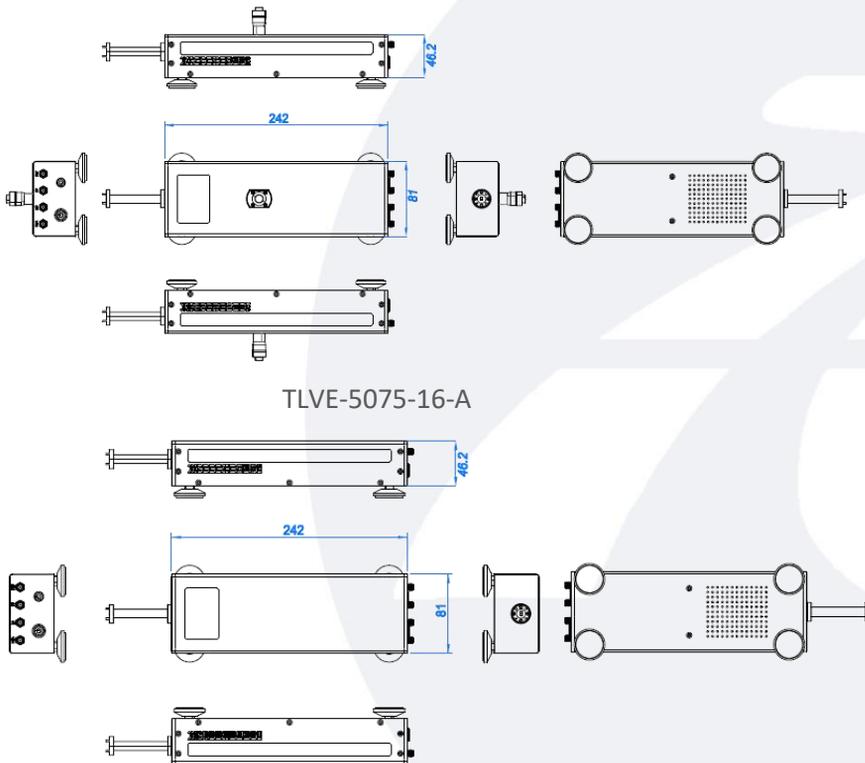

TLVE-5075-16-A

TLVE-5075-16

## Block Diagrams:

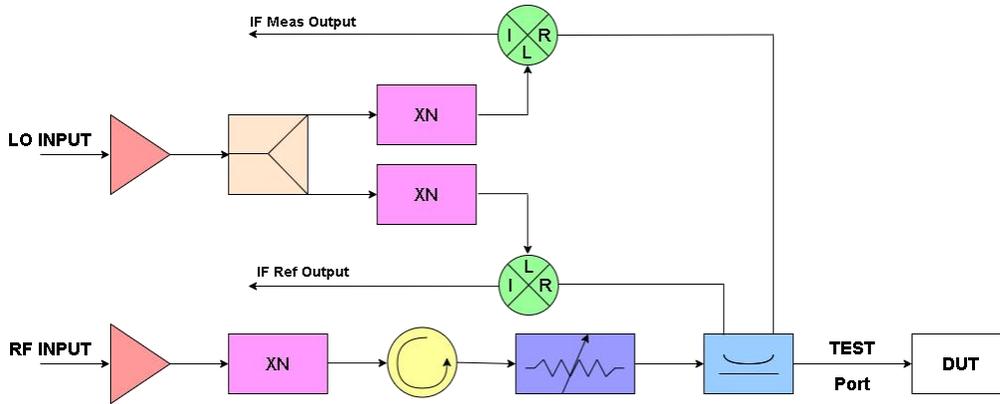

## Environmental And Physical Characteristics:

Description	Parameter	Units
Operating Temperature	0 To +45	°C
Storage Temperature	-55 to +125	°C
Material	Al	
Finish	Gray spray paint	

## Ordering Information:

Part Number	Description	Revision
TLVE-5075-16	G-band VNA Frequency Extender, 50-75 GHz, Output Power:12 dBm typ., Dynamic Range:110 dB typ.,Magnitude Stability @300 Hz BW:±0.1dB,Phase Stability @300 Hz BW:±2°	Rev.1.2
TLVE-5075-16-A	G-band VNA Frequency Extender, 50-75 GHz, Output Power:12 dBm typ., Dynamic Range:110 dB typ.,Magnitude Stability @300 Hz BW:±0.1dB,Phase Stability @300 Hz BW:±2°,with Micrometer driven variable attenuators	Rev.1.2

## Components Included:


Part Number	Description	Quantity
S1-SMAMSMAM-1.2m	COAXIAL CABLE ASSEMBLY	4 PCS
TLACTDC-22012	AC-to-DC Power Adapter	1 PCS

### Notes:


1. Dimensions and specifications may be changed without prior notice.
2. Standard Warranty:three years.

## Typical Performance Data:


### Output Power vs Frequency

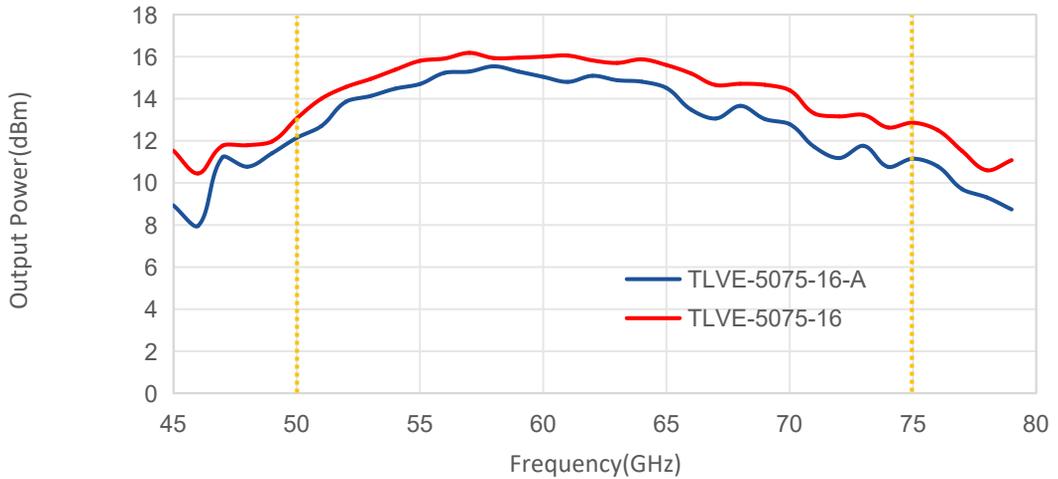

### Dynamic Range vs Frequency

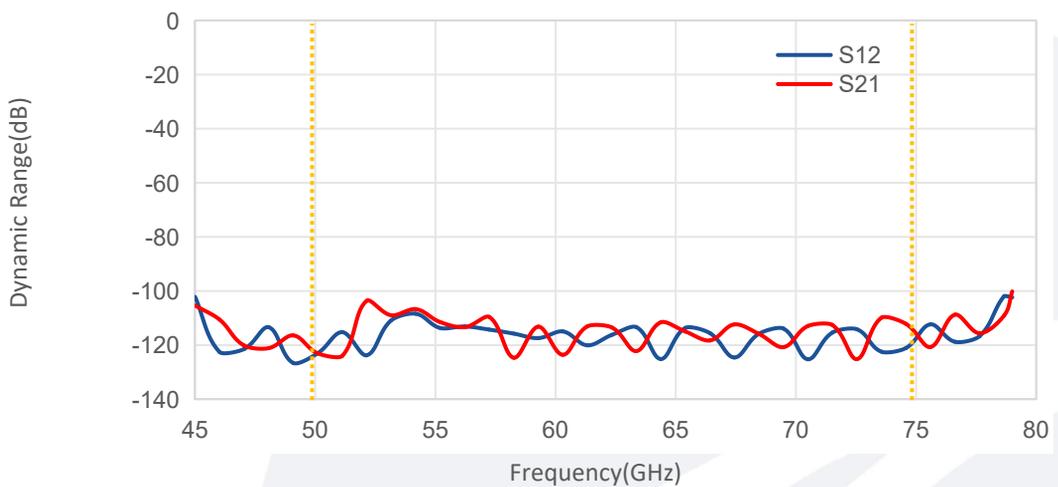


### Amplitude Stability@1h vs Frequency

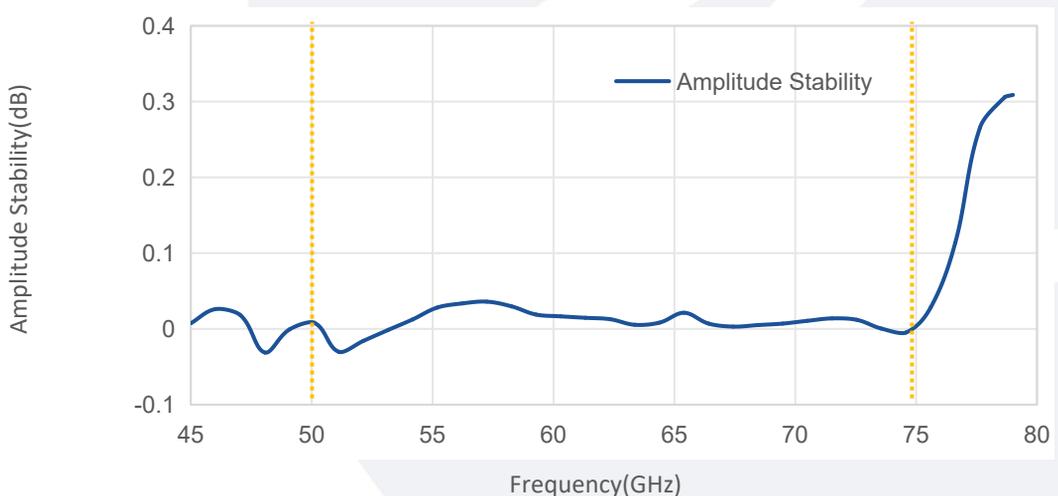


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

**Typical Performance Data:**


**Phase Stability@1h vs Frequency**

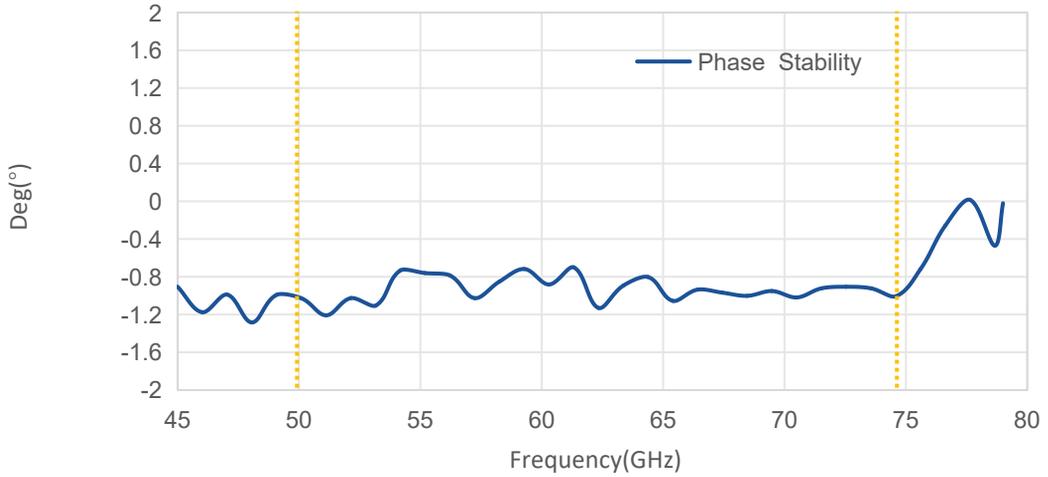

**Effective Directionality vs Frequency**

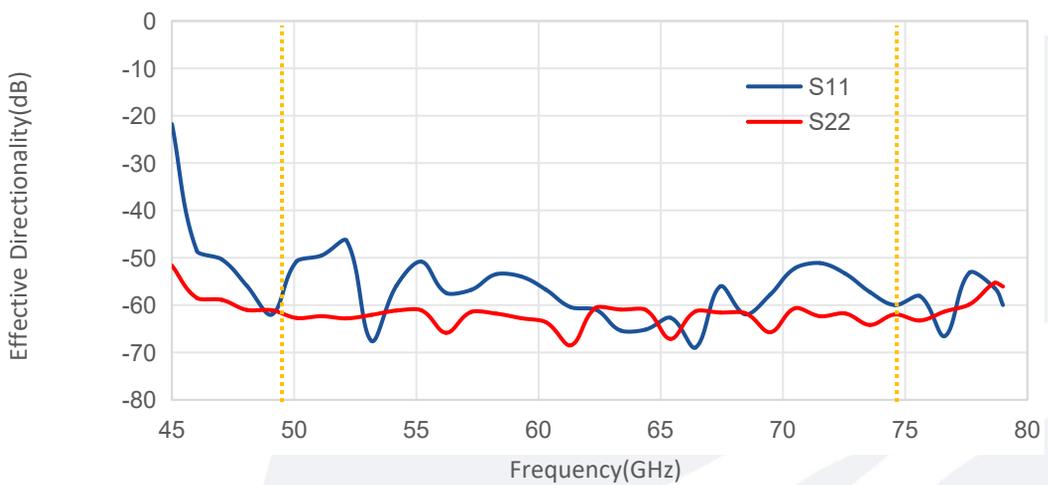


**Payload Matching vs Frequency**

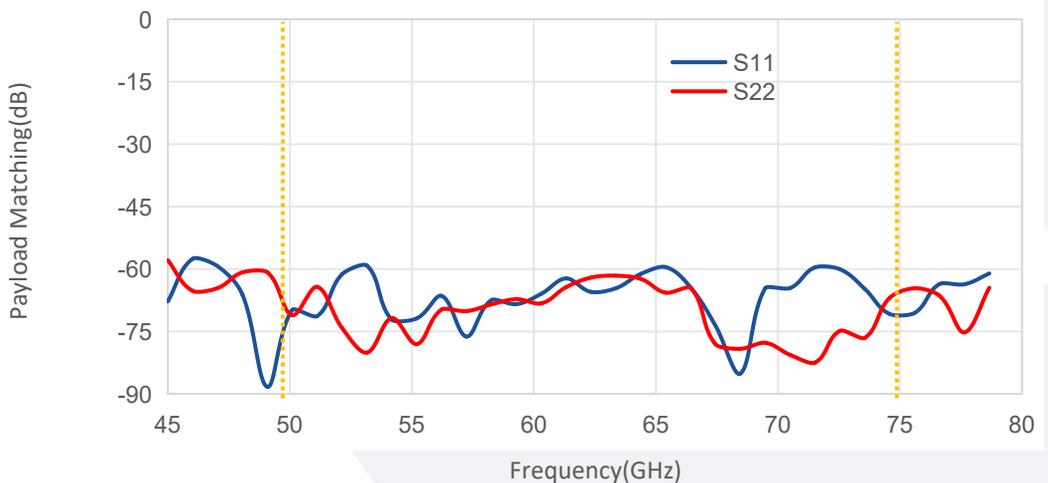


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

**Typical Performance Data:**

**Reflection Tracking vs Frequency**

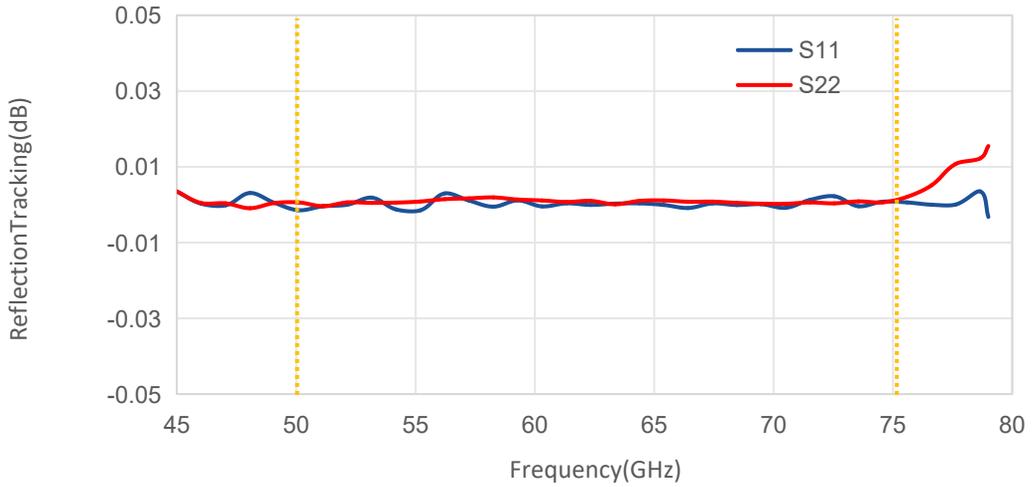

**Transmission Tracking vs Frequency**

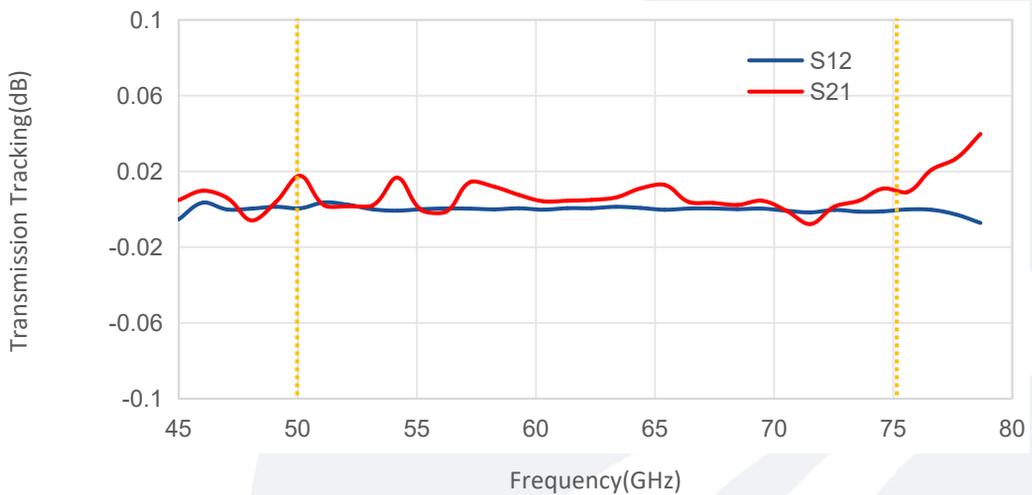

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.