

Spectrum Frequency Extension Systems

330-500GHz/WR-2.2

Model: TLSM-330500-32-2.2

TLSM-330500-32-2.2 spectrum frequency extension systems are a dedicated Test & Measurement solution for extending the range of your signal source to 330-500 GHz.

Features:

- Frequency range: 330-500 GHz
- Conversion Loss SSB: 25dB Typ
- Low conversion loss

Applications:

- Frequency Extension
- Antenna measurements
- Material characterisation

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	330		500	GHz
IF Output Frequency	DC		5	GHz
LO Input Frequency	10.3125		15.625	GHz
LO Input Power	13	15	20	dBm
Multiplication Factor	32			
RF Input Power		-10	0	dBm
Mixer Conversion Loss SSB		25		dB

Mechanical Specifications:


Description	Parameter	Units
RF Input Ports	WR-2.2/UG-387/U	
LO/IF Ports	SMA Female	
LO Input Ports	SMA Female	
IF Output Ports	SMA Female	
DHP Ports	SMA Female	
DLP Ports	SMA Female	
Power Supply Pin	FGG 0B 4 Core	
Size	155.2*75.2*52	mm

Absolute Maximum Ratings :


Parameter	Value
Supply Bias Voltage	+240 V AC
RF Input Power	0 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

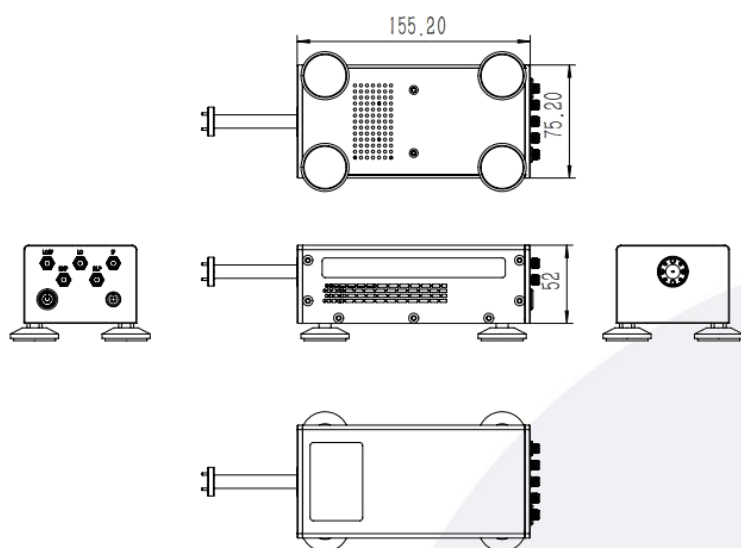

Block Diagrams:

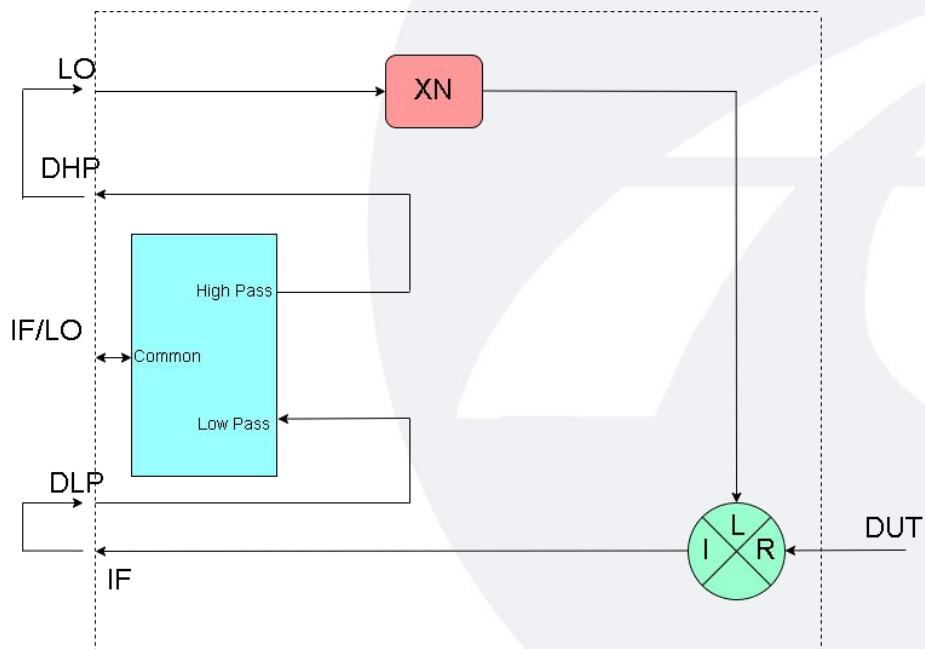

Envrionmental And Physical Characteristics:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Part Number	Description	Revision
TLSM-330500-32-2.2	Spectrum Frequency Extension Systems X32,330-500GHz, Conversion Loss SSB: 25dB typ.	Rev.1.0

Components Included:

Part Number	Description	Quantity
TLACTDC-22012	AC-to-DC Power Adapter	1 PCS