

Equalizer

0.01-40GHz /6dB, Insertion Loss

Model: TLME-0.01G40G-6

The TLME-0.01G40G-6 is a equalizer. It is a positive gain slope equalizer designed to pass 0.01 to 40GHz. Equalization can be applied to reduce low pass filtering effects in both RF/microwave and high speed digital systems.

Features:

- Ultra Wide Band: 0.01-40 GHz
- Good gain equalization
- Small Size and simple to use
- Excellent return loss

Applications:

- Cable or Waveguide Loss Compensation
- Amplifier Flatness Compensation
- Microwave Radio
- RF Transceivers
- Telecom Infrastructure

电气特性 Electrical Characteristics:


参数 Parameter		Min	Typ	Max	单位 Units
频率范围 Frequency range		0.01-40			GHz
插损 Insertion Loss	@0.01GHz		6		dB
	@40GHz		2		
回波损耗 Return Loss			-15		dB
耐受功率 Power Handling			30		dBm
阻抗 Impedance		50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.92mm	
长度 Length	42.2	mm

外形图 Outline Drawing:


Unit:mm

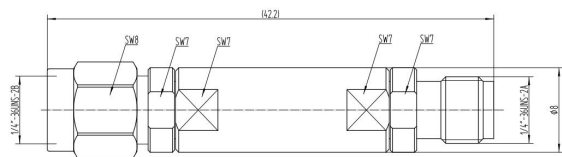

TLME-0.01G40G-6

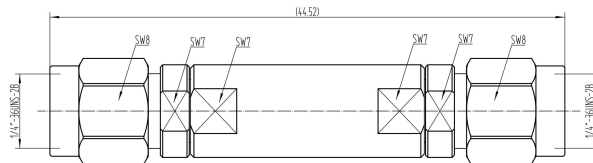

TLME-0.01G40G-6-MM

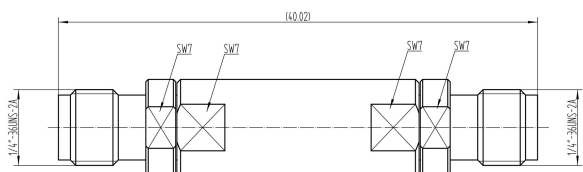

TLME-0.01G40G-6-FF

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TLME-0.01G40G-6	Equalizer, 0.01-40GHz, Insertion loss:6dB@0.01GHz; 2dB@40GHz 2.92mm Male/2.92mm Female	Rev.1.1
TLME-0.01G40G-6-MM	Equalizer, 0.01-40GHz, Insertion loss:6dB@0.01GHz; 2dB@40GHz 2.92mm Male/2.92mm Male	Rev.1.1
TLME-0.01G40G-6-FF	Equalizer, 0.01-40GHz, Insertion loss:6dB@0.01GHz; 2dB@40GHz 2.92mm Female/2.92mm Female	Rev.1.1

典型曲线 Typical Performance Data:

Return Loss vs Frequency

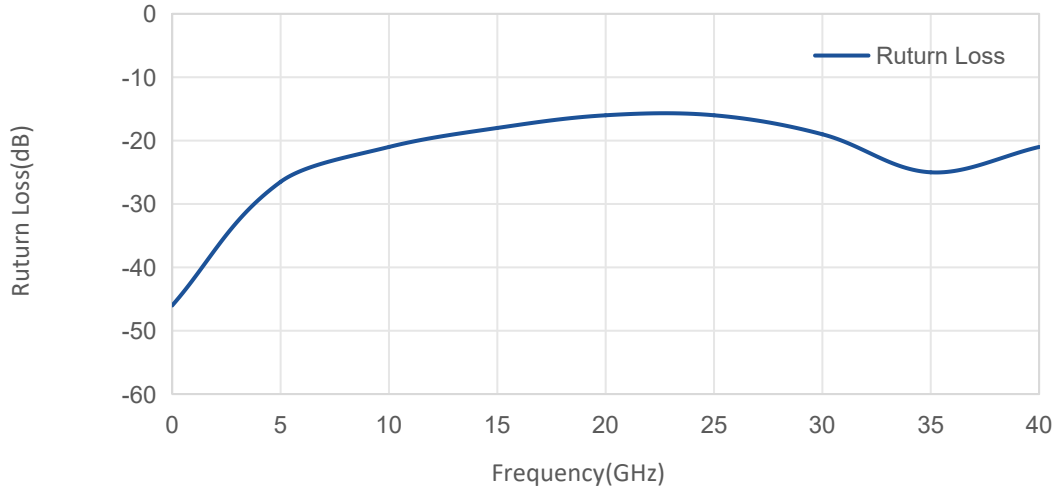

Insertion Loss vs Frequency

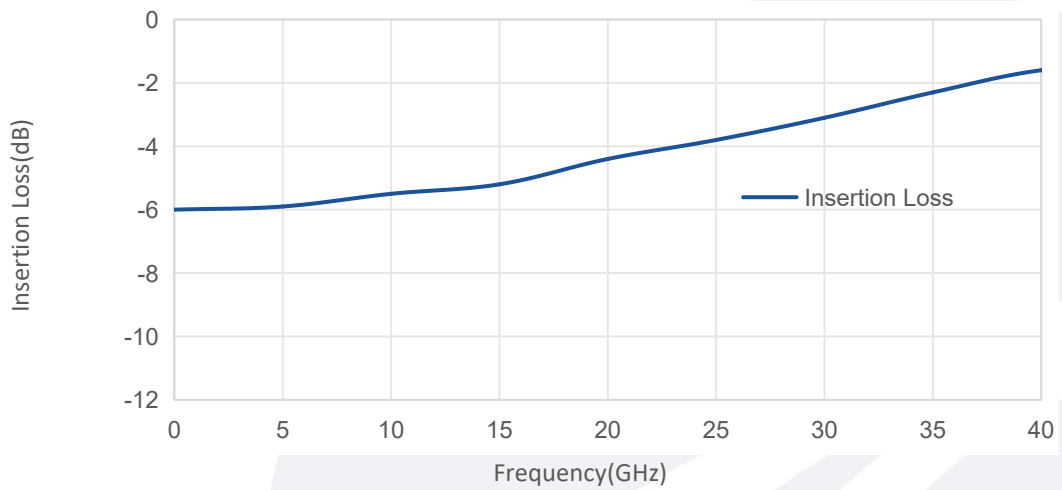

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.