

Equalizer

DC-50GHz /3.8dB, Insertion Loss

Model: TLME-DC70G-8

The TLME-DC70G-8 is a equalizer. It is a positive gain slope equalizer designed to pass DC to 70GHz. Equalization can be applied to reduce low pass filtering effects in both RF/microwave and high speed digital systems.

Features:

- Frequency range: DC-70GHz
- Good gain equalization
- Small Size and simple to use
- Excellent return loss

Applications:

- N/A

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	DC-70			GHz
插损 Insertion Loss@70GHz		3.8		dB
均衡量 Slope		8.0		dB
回波损耗 Rreturn Loss		-20		dB
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	1.85mm Female/1.85mm Female	
尺寸 Size	17*17*9	mm

外形图 Outline Drawing:

Unit:mm

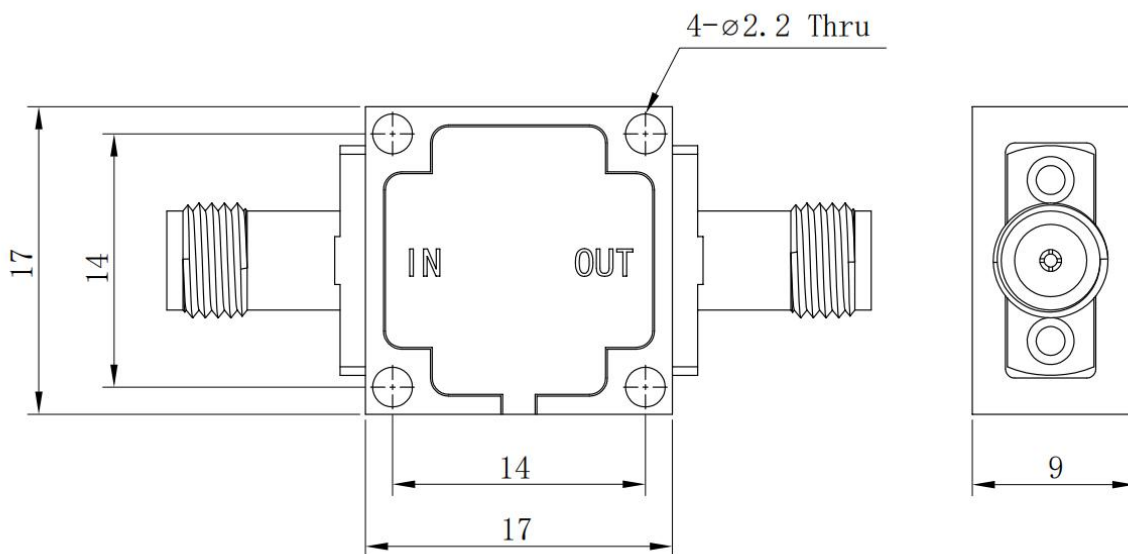

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLME-DC70G-8	Equalizer, DC-70GHz, Insertion loss:3.8dB@70GHz	Rev.1.1

典型曲线 Typical Performance Data:

Insertion Loss vs Frequency

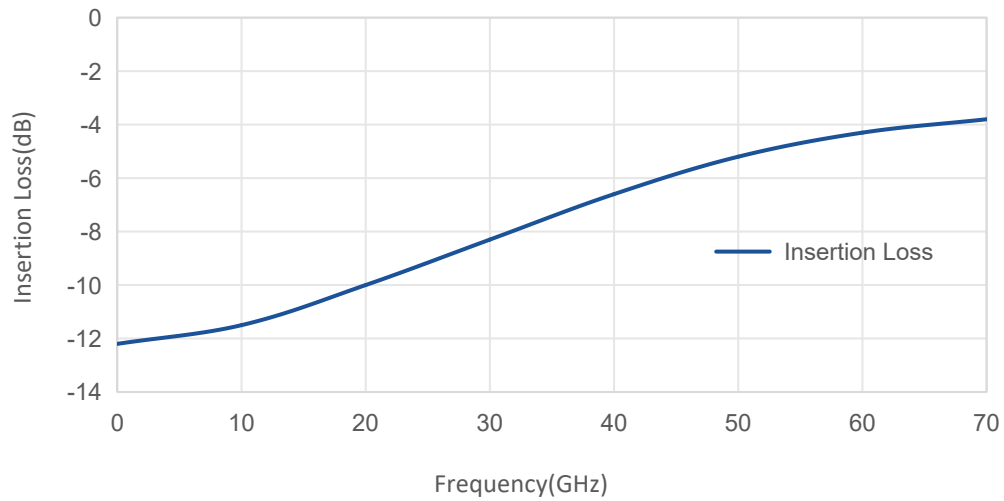

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.