



Electrical & Environmental Characteristics

Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~50GHz
Dielectric Withstanding Voltage	500 V
VSWR	≤1.30
Insertion Loss	≤0.50dB
Operating Temperature	- 55~+125°C

Material & Coat-Plating

Inner Conductor	BE-CU, Gold Plated
Dielectric	PEI
Body&Nut	Stainless Steel, Passivated

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Suzhou Talent Microwave,Inc			
		CHK				
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 3 PLC ± 3 PLC ±- ANGLES ±1°	APVD	Product Model 1.0-2.4-KJG 1.0mm Female to 2.4mm Male adaptor			
		PRODUCT SPEC				
		APPLICATION SPEC				
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SIZE A4	GAGE CODE 0T8L4	DRAWING NO	
		CUSTOMER DRAWING			SHEET 1 OF 1	RVE 1

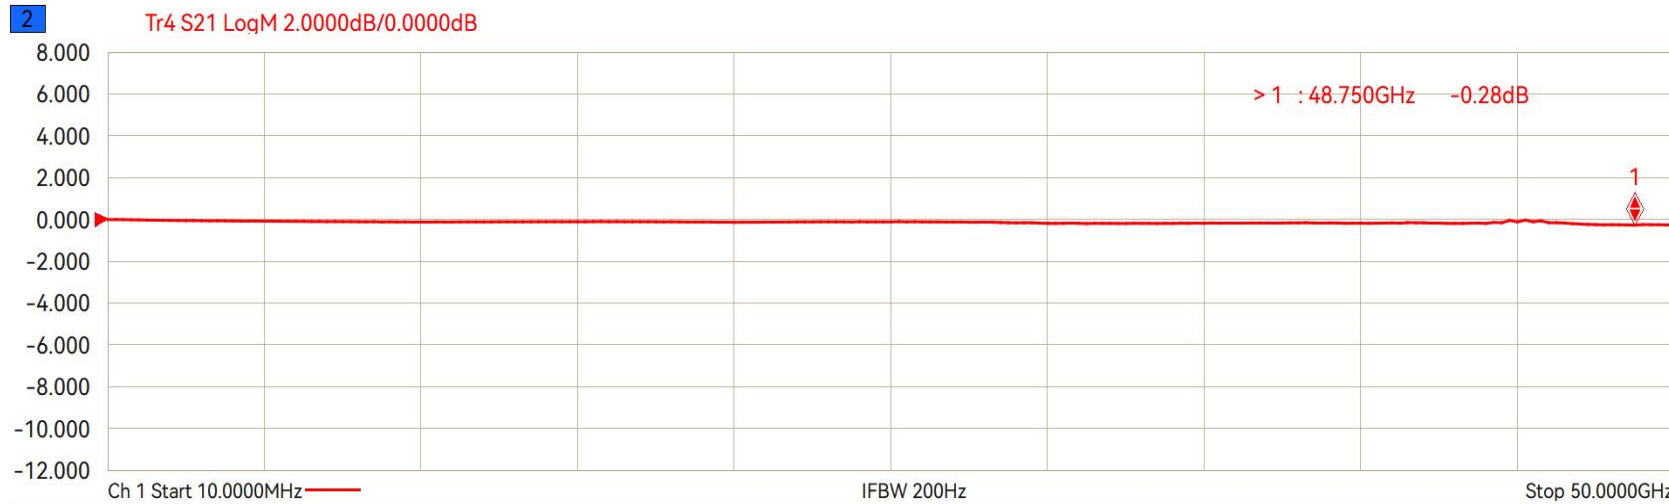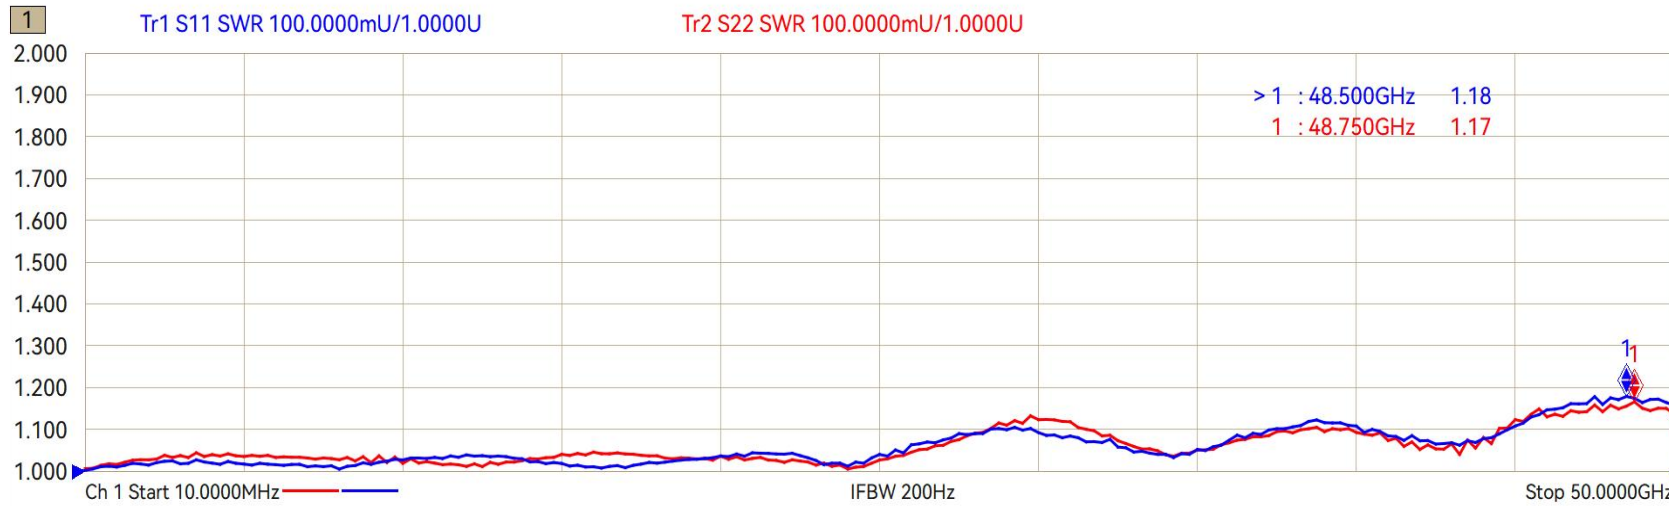

	Sweep Type	Start Freq(GHz)	Stop Freq(GHz)	Sweep Points	IF Bandwidth(Hz)	Sweep Time(s)	Port 1,2Power(dBm)
Ch 1	LIN Freq	0.01	50	201	200	0.944561	-5,-5