

## Coaxial DC Block

30KHz-110GHz/1.0 mm/25V

Model:TDCB1F1F-3

The TDCB1F1F-3 is a 1.0mm coaxial DC block that prevents the flow of DC current in the frequency range of 30KHz to 110GHz. The DC block has a typical insertion loss of 2dB, a typical return loss of -12dB. It is manufactured with 1.0mm female connectors for convenient circuit insertion. The breakdown voltage is +25 Volts..

### Features:

- Operating Frequency 30KHz to 110GHz
- High Return Loss
- Low Cost

### Applications:

- laboratory test
- Instrumentations
- System Integration

## 电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	30KHz-110GHz			
回波损耗 Return Loss		-12		dB
插损 Insertion Loss		2	2.5	dB
击穿电压 Breakdown Voltage		25		V
群延时 Group Delay		80		ps
阻抗 Impedance		50		Ohms

## 环境和机械特性 Environmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
壳体材质 Body Material	Copper	
表面处理 Finish	Gold plated	
内导体 Inner Conductor	Becu,Golden	
接口 Connectors	1.0mm Female	
长度 Length	22.4*9.5*9.5	mm
工作温度 Working Temperature	-40° to +70° C, operating	

**外形图 Outline Drawing:**

Unit:mm

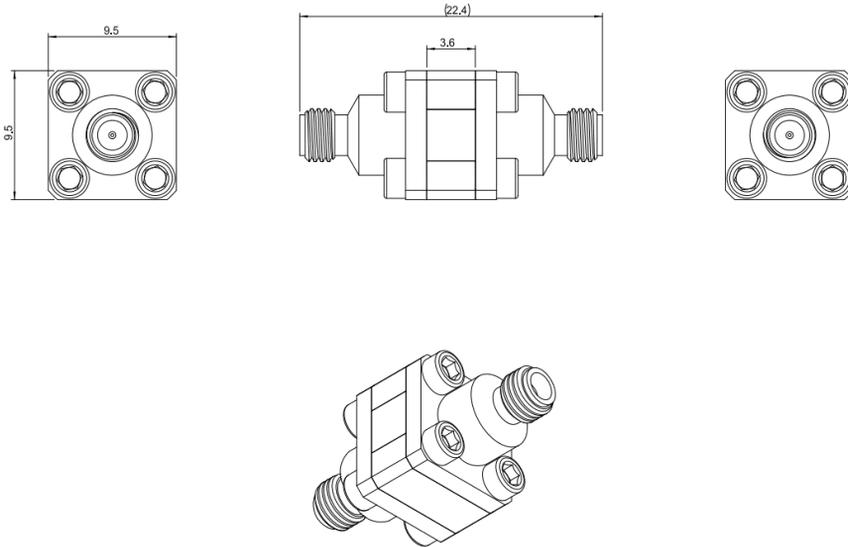


**订货信息 Ordering Information:**

标准型号 Base Number	描述 Description
TDCB1F1F-3	30KHz-110GHz,25V,1.0mm Coaxial DC Block

**典型曲线 Typical Performance Data:**


**Insertion Loss vs Frequency**

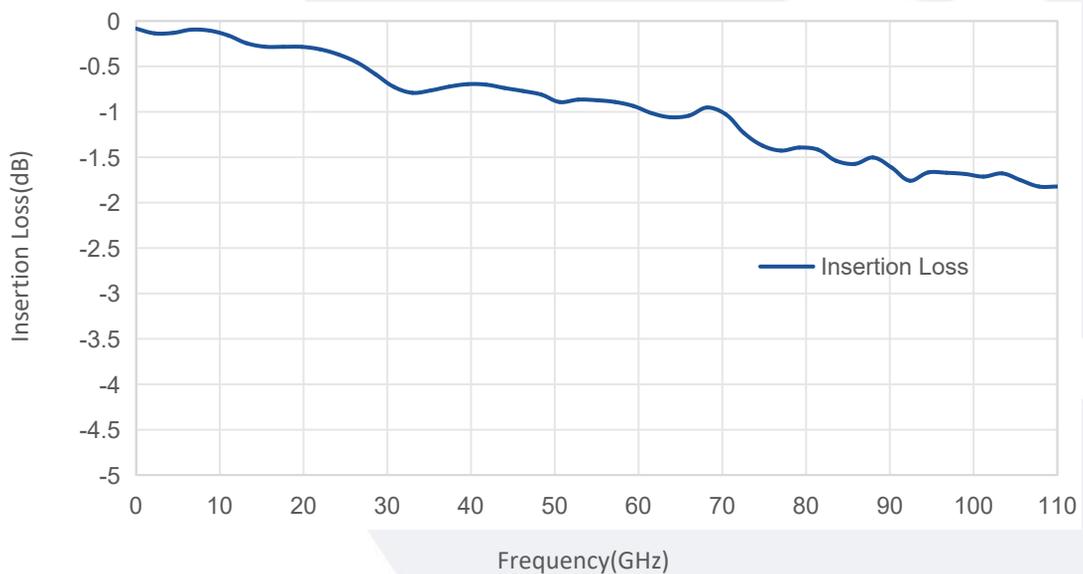


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

**典型曲线 Typical Performance Data:**

**Insertion Loss vs Frequency**

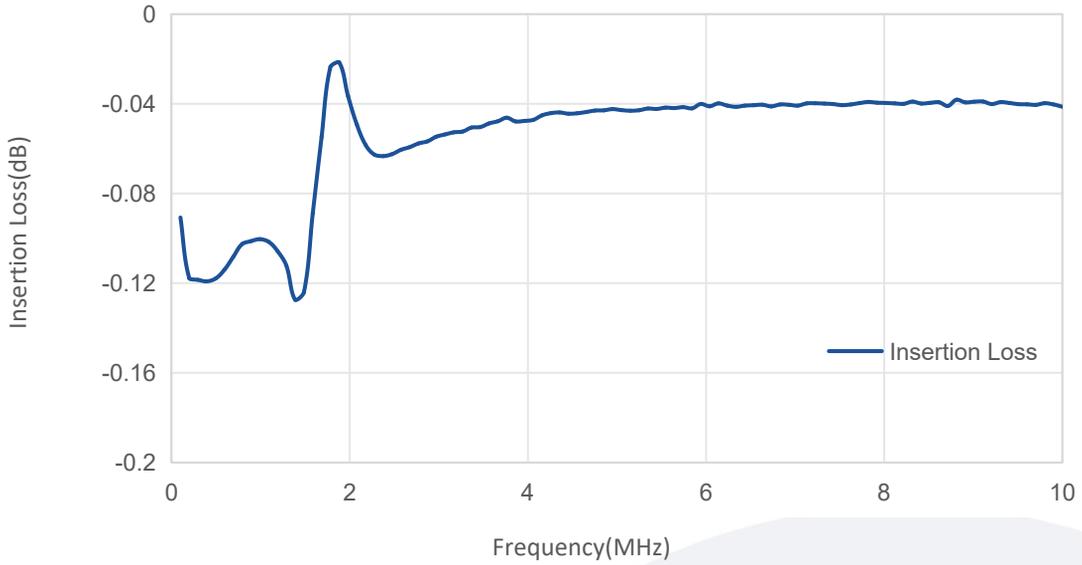



**Insertion Loss vs Frequency**

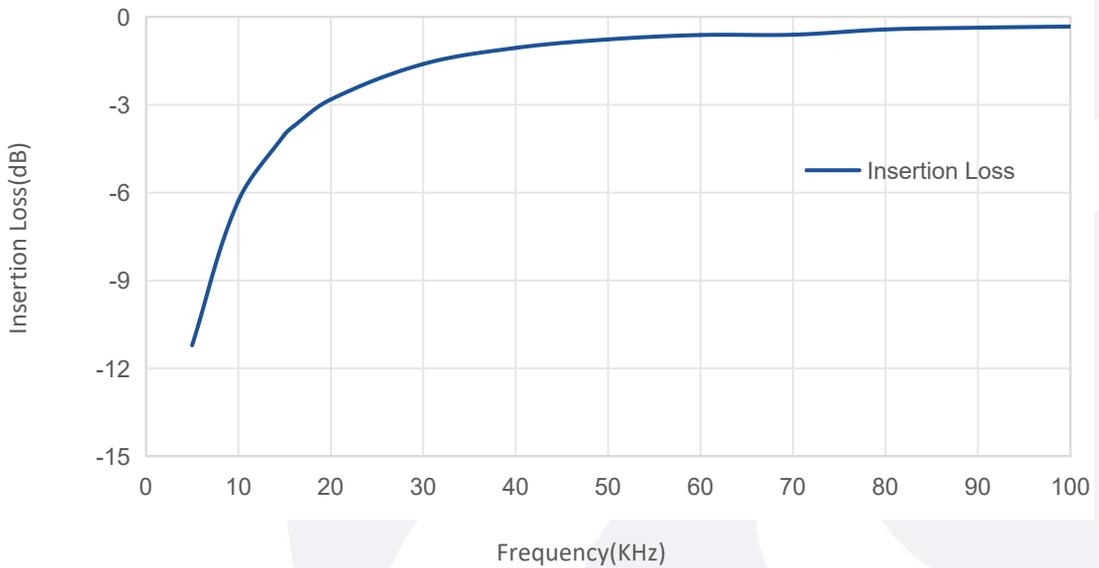

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

## 典型曲线 Typical Performance Data:

### Return Loss vs Frequency

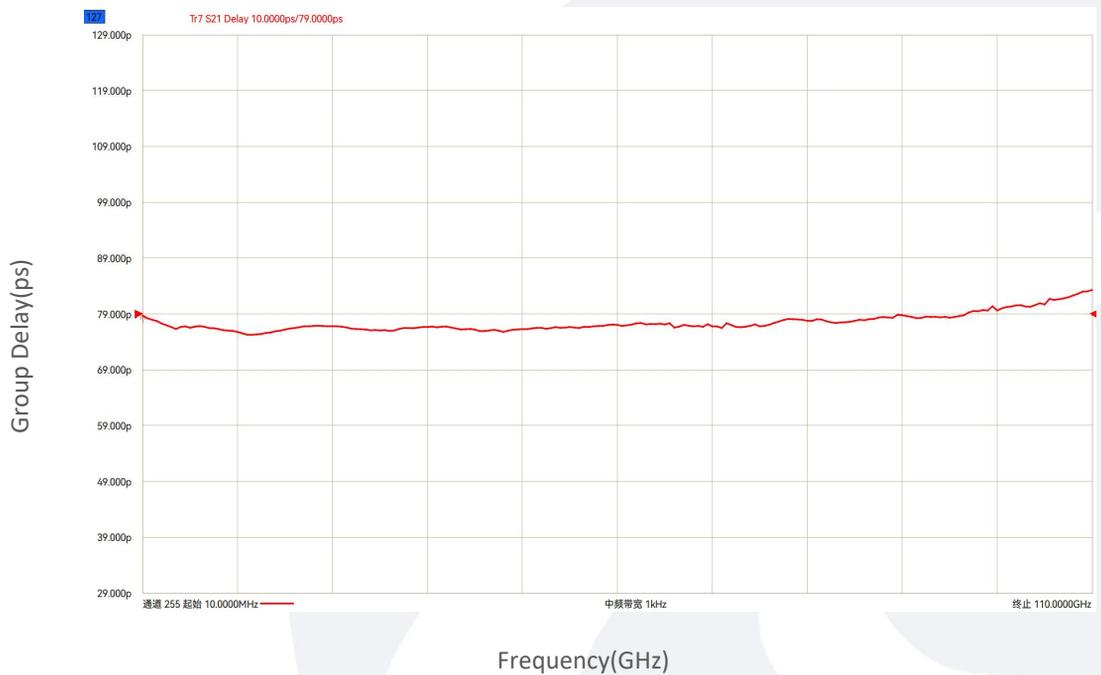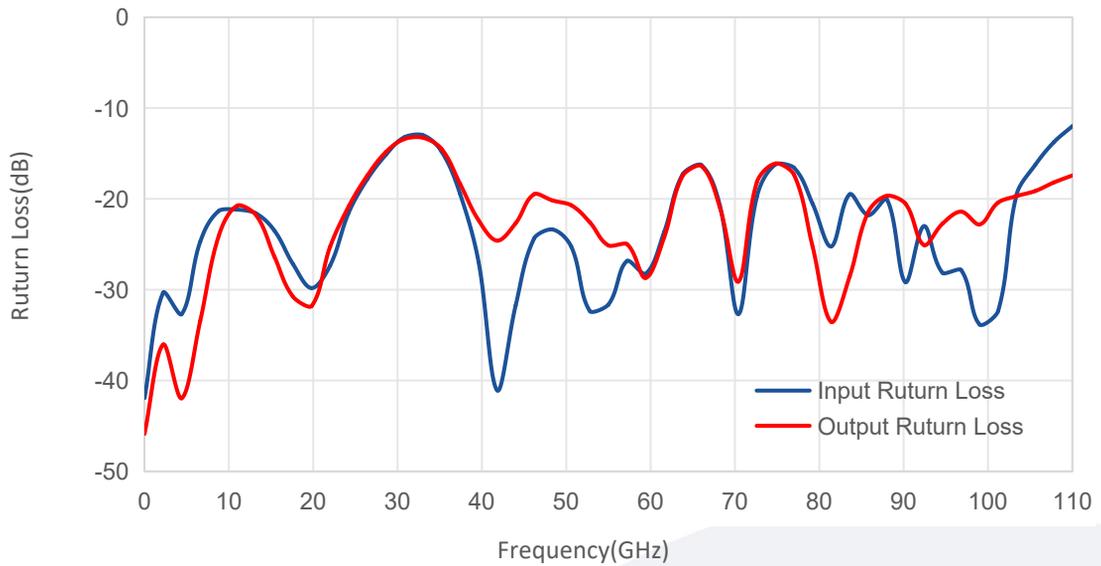

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.