

J-band Waveguide Directional Coupler

WR-3.4/20dB Coupling

Model: TDC-220330-20-3.4

TDC-220330-20-3.4 is a J-band, four-port waveguide directional coupler that delivers a 20 dB nominal coupling level and 30 dB typical directivity across the full waveguide band from 220 to 330 GHz. The interfaces of the coupler are WR-3.4 waveguides with UG-387/U-M anti-cocking flanges.

Features:

- Operating Frequency 220 to 330 GHz
- Full Band Operation
- Low Insertion Loss
- Moderate Directivity

Applications:

- Test Labs
- Instrumentations
- Sub-assemblies

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
工作频率 Frequency Range	220		330	GHz
插入损耗 Insertion Loss		3		dB
耦合度 Coupling		20		dB
隔离度 Isolation		50		dB
方向性 Directivity		30		dB
输入驻波 Input VSWR		1.2		:1
输出驻波 Output VSWR		1.2		:1

环境和机械特性 Environmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-40 To +85	°C
存储温度 Storage Temperature	-40 to +85	°C
波导接口 Waveguide Connectors	WR-3.4/UG-387/U	
耦合接口 Coupled Port	WR-3.4/UG-387/U	
尺寸 Size	30*36*23	mm

外形图 Outline Drawing:

Unit:mm

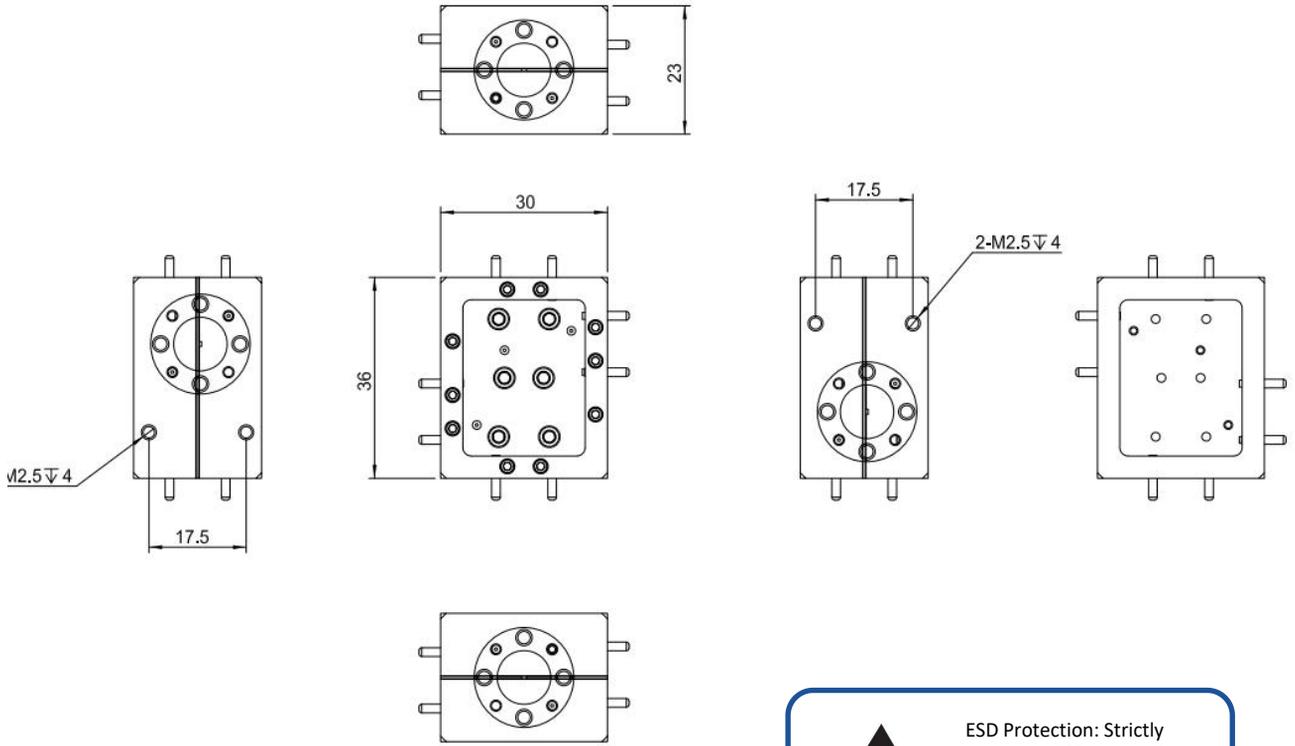


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TDC-220330-20-3.4	J-band Waveguide Directional Coupler, 220-330GHz, Insertion Loss: 3dB Typ, Coupling: 20dB Typ, WR-3.4	Rev.1.0

典型曲线 Typical Performance Data:


Insertion Loss vs Frequency

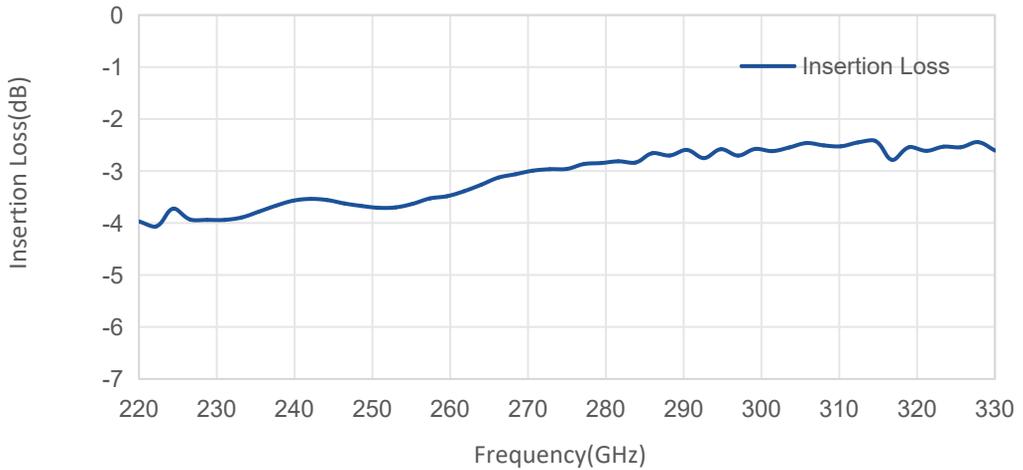

Coupling vs Frequency

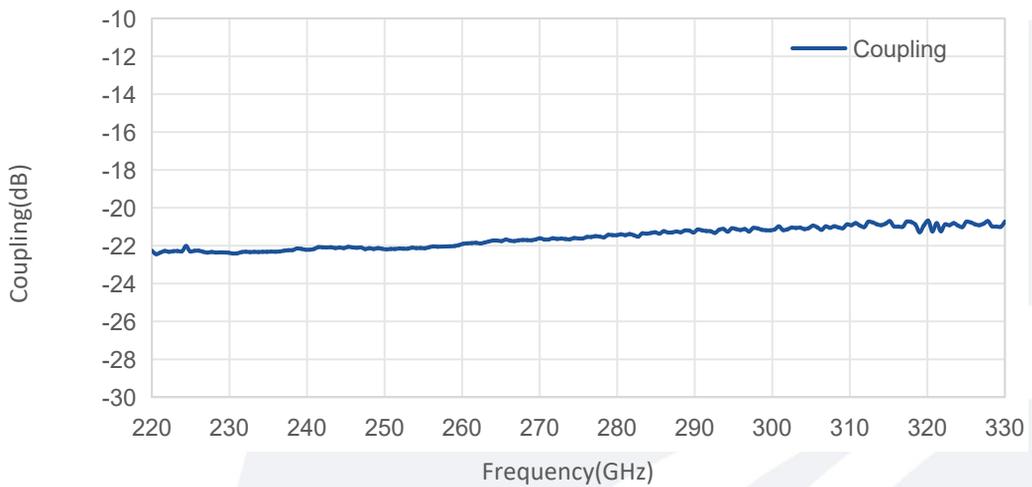


Isolation vs Frequency

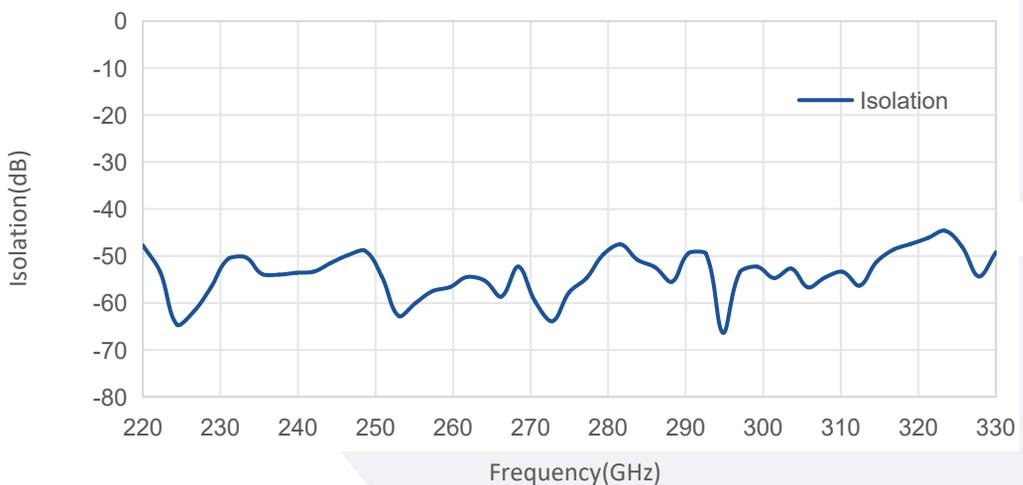

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

VSWR vs Frequency

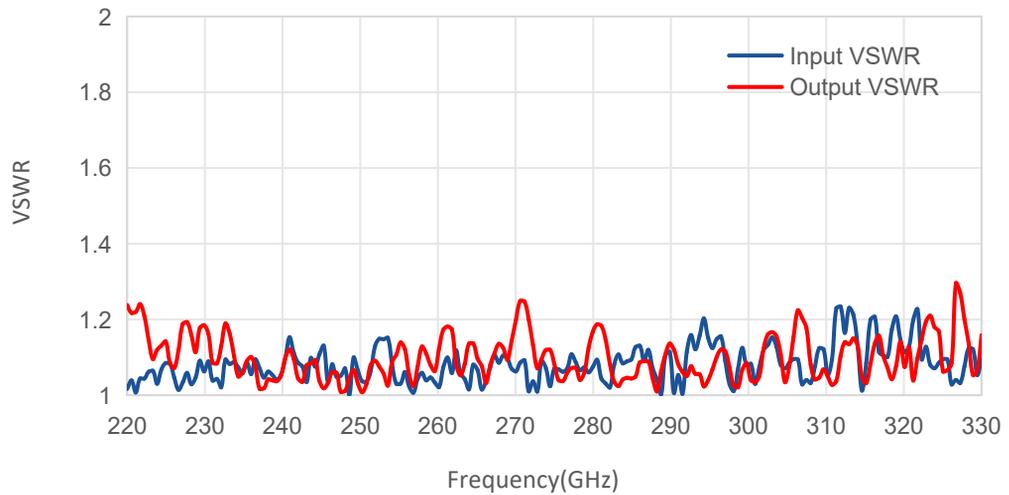

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.